


PRESS 2

PROBLEM SUMMARY

Sample Rating Trend ISO

Component Hydraulic System Fluid PETRO CANADA HYDREX AW 46 (--- GAL)

COMPONENT CONDITION SUMMARY

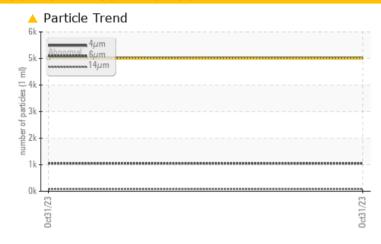

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS								
Sample Status			ATTENTION					
Particles >4µm	ASTM D7647	>5000	<u> </u>					
Oil Cleanliness	ISO 4406 (c)	>19/17/14	A 20/17/14					

Customer Id: EVEPIQ Sample No.: PCA0109501 Lab Number: 05999005 Test Package: PLANT



To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 <u>dougb@wearcheckusa.com</u>

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT



Machine Id PRESS 2

Component **Hydraulic System** PETRO CANADA HYDREX AW 46 (--- GAL)

DIAGNOSIS

A Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 6 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0109501		
Sample Date		Client Info		31 Oct 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		Not Changd		
Sample Status				ATTENTION		
WEAR METALS	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	10		
Chromium	ppm	ASTM D5185m	>20	0		
Nickel	ppm	ASTM D5185m	>20	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>20	0		
Lead	ppm	ASTM D5185m	>20	0		
Copper	ppm	ASTM D5185m	>20	8		
Tin	ppm	ASTM D5185m	>20	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0		
Barium	ppm	ASTM D5185m	0	0		
Molybdenum	ppm	ASTM D5185m	0	0		
Manganese	ppm	ASTM D5185m	0	0		
Magnesium	ppm	ASTM D5185m	0	0		
Calcium	ppm	ASTM D5185m	50	57		
Phosphorus	ppm	ASTM D5185m	330	330		
Zinc	ppm	ASTM D5185m	430	487		
Sulfur	ppm	ASTM D5185m	760	1319		
CONTAMINAN	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	0		
Sodium	ppm	ASTM D5185m		<1		
Potassium	ppm	ASTM D5185m	>20	0		
FLUID CLEANL	INESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	<u> </u>		
Particles >6µm		ASTM D7647	>1300	1051		
Particles >14µm		ASTM D7647	>160	81		
Particles >21µm		ASTM D7647	>40	19		
Particles >38µm		ASTM D7647	>10	1		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	A 20/17/14		
FLUID DEGRAD	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.70	0.61		



Acid Number

0.80

0.70 (B/H0) B 0.50 -3 0.40

j 0.30

Pg 0.20

0.10 0.00.

54

52

50 () 48 0+) 46

42

40 38

B रेंडे ₄₄

Base

OIL ANALYSIS REPORT

method


limit/base

current


history1


history2

VISUAL





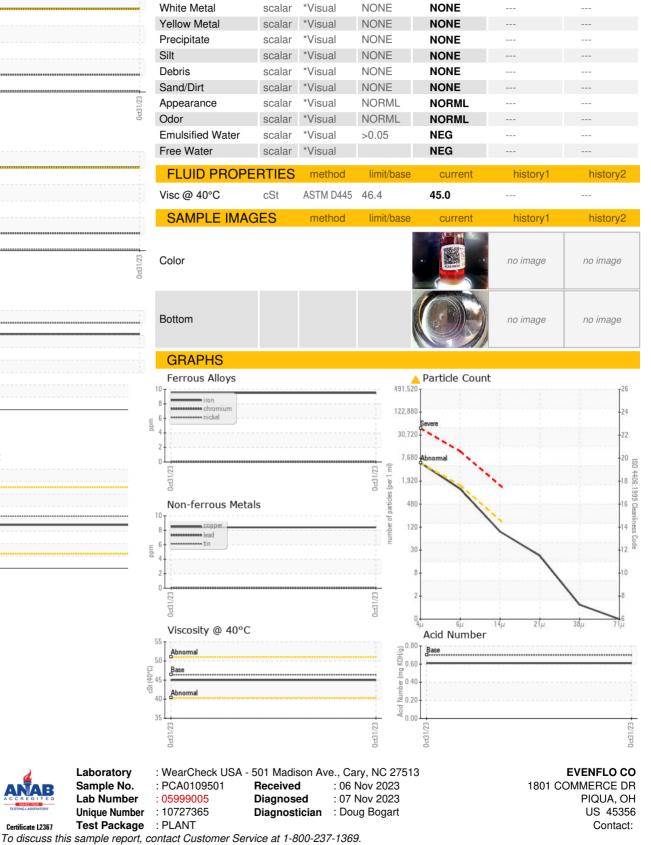

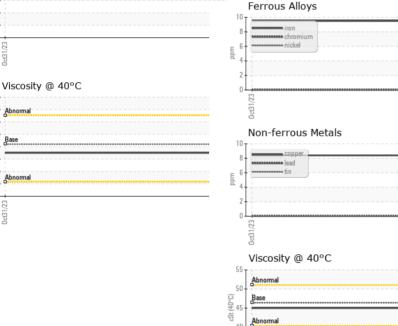

Laboratory

Sample No. Lab Number Unique Number Certificate L2367

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Page 4 of 4

T: