


# **PROBLEM SUMMARY**

#### Area (94712X) Walgreens - Tractor Machine Id [Walgreens - Tractor] 136A62066 Component

**Diesel Engine** 

PETRO CANADA DURON SHP 10W30 (11 GAL)

# COMPONENT CONDITION SUMMARY

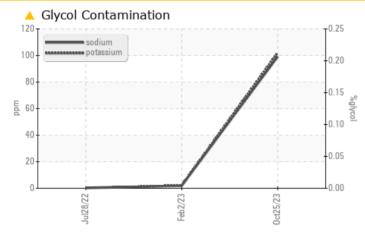

## RECOMMENDATION

We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS								
Sample Status				ABNORMAL	NORMAL	NORMAL		
Sodium	ppm	ASTM D5185m		<u> </u>	2	<1		
Potassium	ppm	ASTM D5185m	>20	<b>102</b>	2	0		


Customer Id: TSV1373 Sample No.: PCA0106160 Lab Number: 05999606 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data: Jonathan Hester +1 919-379-4092 x4092 jhester@wearcheckusa.com

*To change component or sample information:* Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

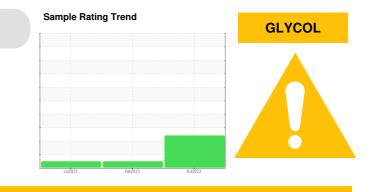

RECOMMENDED ACTIONS						
Action	Status	Date	Done By	Description		
Change Fluid			?	Oil and filter change at the time of sampling has been noted.		
Change Filter			?	Oil and filter change at the time of sampling has been noted.		
Resample			?	We recommend an early resample to monitor this condition.		
Check Glycol Access			?	We advise that you check for the source of the coolant leak.		

# HISTORICAL DIAGNOSIS



02 Feb 2023 Diag: Wes Davis

Resample at the next service interval to monitor.All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.



28 Jul 2022 Diag: Wes Davis

#### NORMAL



Resample at the next service interval to monitor.All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.





# **OIL ANALYSIS REPORT**

## Area (94712X) Walgreens - Tractor Machine Id [Walgreens - Tractor] 136A62066

**Diesel Engine** 

Fluid PETRO CANADA DURON SHP 10W30 (11 GAL)

## DIAGNOSIS

### Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

### Wear


All component wear rates are normal.

### Contamination

Sodium and/or potassium levels are high.

#### Fluid Condition


The BN result indicates that there is suitable alkalinity remaining in the oil.

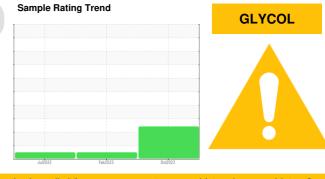

SAMPLE INFORI	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0106160	PCA0090872	PCA0078503
Sample Date		Client Info		25 Oct 2023	02 Feb 2023	28 Jul 2022
Machine Age	mls	Client Info		528447	481302	415893
Oil Age	mls	Client Info		47145	65409	39819
Oil Changed		Client Info		Changed	Changed	Changed
Sample Status				ABNORMAL	NORMAL	NORMAL
CONTAMINAT	ION	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0	<1.0	<1.0
WEAR METAL	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>80	62	41	24
Chromium	ppm	ASTM D5185m	>5	4	5	2
Nickel	ppm	ASTM D5185m	>2	<1	0	<1
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>30	20	25	15
Lead	ppm	ASTM D5185m	>30	0	0	0
Copper	ppm	ASTM D5185m	>150	6	5	4
Tin	ppm	ASTM D5185m	>5	2	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	37	11	5
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	50	62	59	60
Manganese	ppm	ASTM D5185m	0	1	<1	<1
Magnesium	ppm	ASTM D5185m	950	884	812	872
Calcium	ppm	ASTM D5185m	1050	1054	1174	1119
Phosphorus	ppm	ASTM D5185m	995	962	962	921
Zinc	ppm	ASTM D5185m	1180	1270	1191	1195
Sulfur	ppm	ASTM D5185m	2600	3017	2647	2735
CONTAMINAN	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	10	8	6
Sodium	ppm	ASTM D5185m		<mark>/</mark> 99	2	<1
Potassium	ppm	ASTM D5185m	>20	<u> </u>	2	0
Glycol	%	*ASTM D2982		NEG	NEG	NEG
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	1.1	1.3	1.1
Nitration	Abs/cm	*ASTM D7624	>20	15.5	11.1	11.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.2	24.3	23.6
FLUID DEGRA	DATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	23.0	19.6	18.6
Base Number (BN)	mg KOH/g	ASTM D2896		20.0	5.7	7.3



# **OIL ANALYSIS REPORT**

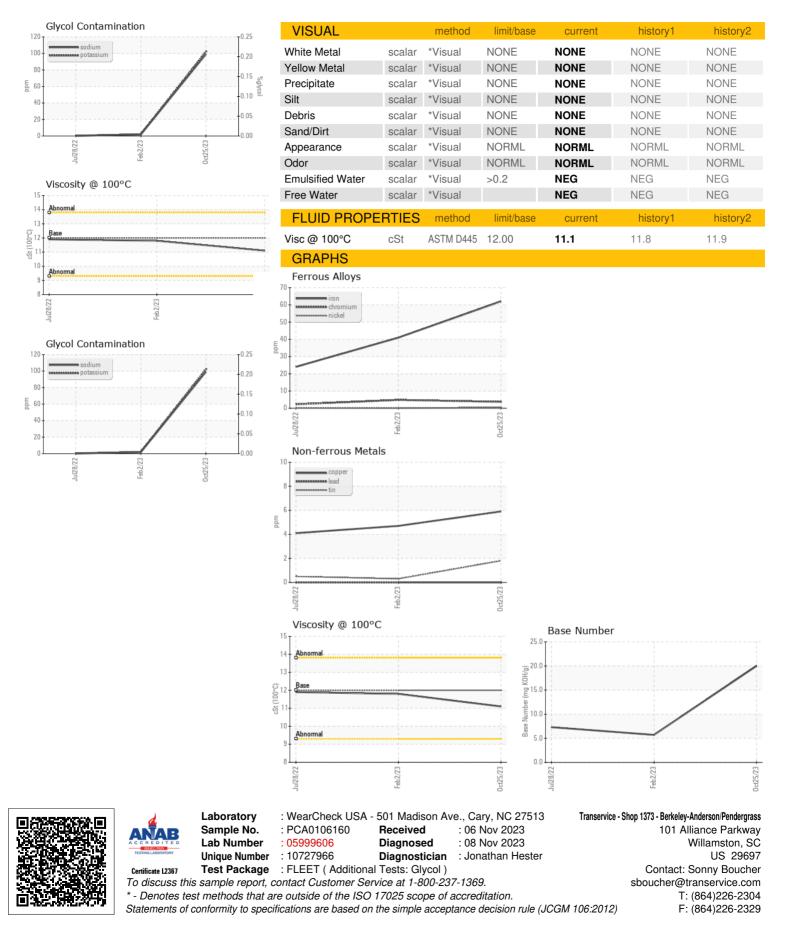

Submitted By: Sonny Boucher

Page 4 of 4