




# OIL ANALYSIS REPORT

Sample Rating Trend

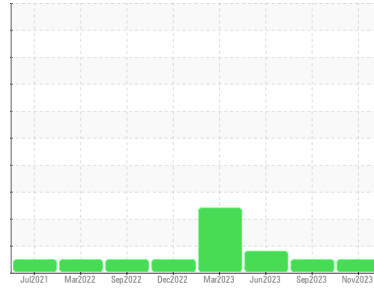

**NORMAL**



Machine Id  
**924011**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. ( Customer Sample Comment: Actual hours 2177 484 hours sample only )

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0094846</b>	GFL0088276	GFL0077513
Sample Date	Client Info	<b>01 Nov 2023</b>	11 Sep 2023	21 Jun 2023
Machine Age	hrs	<b>2177</b>	1856	179010
Oil Age	hrs	<b>484</b>	163	0
Oil Changed	Client Info	<b>Not Changed</b>	Not Changed	Not Changed
Sample Status		<b>NORMAL</b>	NORMAL	ABNORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	1.2	▲ 3.4
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >90	<b>38</b>	34	15
Chromium	ppm ASTM D5185m >20	<b>2</b>	2	<1
Nickel	ppm ASTM D5185m >2	<b>0</b>	0	0
Titanium	ppm ASTM D5185m >2	<b>&lt;1</b>	1	0
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>11</b>	6	9
Lead	ppm ASTM D5185m >40	<b>0</b>	0	0
Copper	ppm ASTM D5185m >330	<b>6</b>	3	0
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	<1	0
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>96</b>	257	3
Barium	ppm ASTM D5185m 0	<b>&lt;1</b>	3	4
Molybdenum	ppm ASTM D5185m 60	<b>85</b>	99	54
Manganese	ppm ASTM D5185m 0	<b>4</b>	5	0
Magnesium	ppm ASTM D5185m 1010	<b>795</b>	697	766
Calcium	ppm ASTM D5185m 1070	<b>1292</b>	1428	885
Phosphorus	ppm ASTM D5185m 1150	<b>873</b>	709	817
Zinc	ppm ASTM D5185m 1270	<b>1038</b>	869	1022
Sulfur	ppm ASTM D5185m 2060	<b>2718</b>	2929	2893

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>21</b>	14	5
Sodium	ppm ASTM D5185m	<b>14</b>	18	60
Potassium	ppm ASTM D5185m >20	<b>20</b>	12	10

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >6	<b>0.5</b>	0.3	0.3
Nitration	Abs/cm *ASTM D7624 >20	<b>8.7</b>	6.8	8.6
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>21.5</b>	21.2	20.5

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>15.9</b>	14.9	17.6
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>8.0</b>	8.7	8.2







# OIL ANALYSIS REPORT

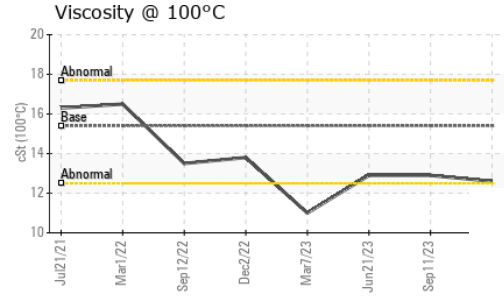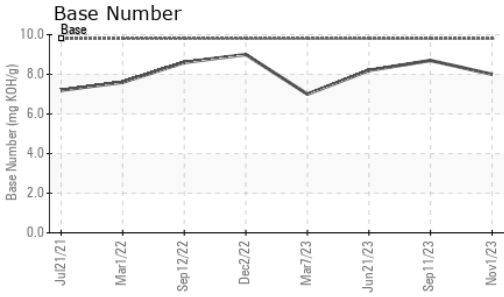

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	<b>12.6</b>	12.9

## GRAPHS

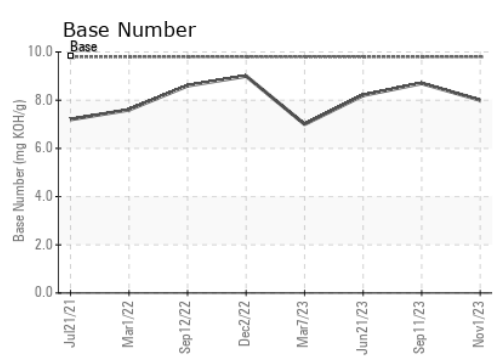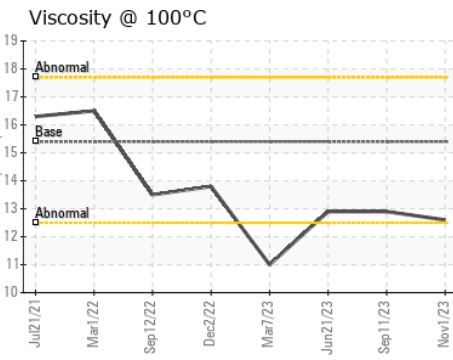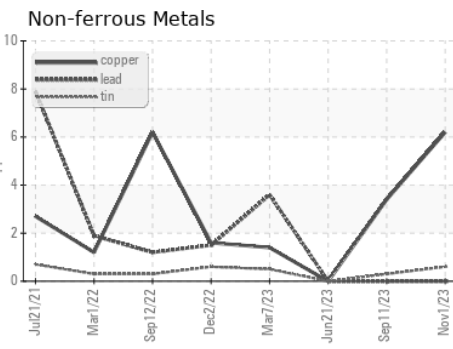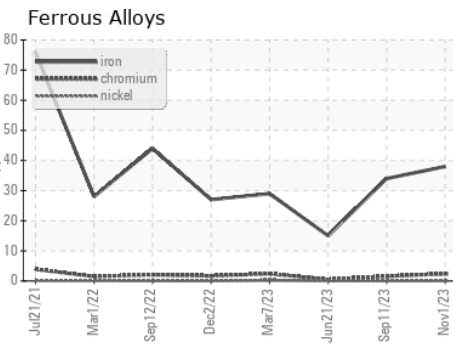

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0094846 **Received** : 06 Nov 2023  
**Lab Number** : **05999701** **Diagnosed** : 08 Nov 2023  
**Unique Number** : 10728061 **Diagnostician** : Don Baldrige  
**Test Package** : FLEET

**GFL Environmental - 625 - Harrison Hauling**  
 4102 Industrial Pkwy  
 Harrison, MI  
 US 48625  
 Contact: Glenda Standen  
 gstanden@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: