


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
**KEMP QUARRIES / RIVER VALLEY BACKBONE**  
Machine Id  
**WL035**  
Component  
**Transmission (Manual)**  
Fluid  
**MOBIL MOBILTRANS HD 30 (--- GAL)**

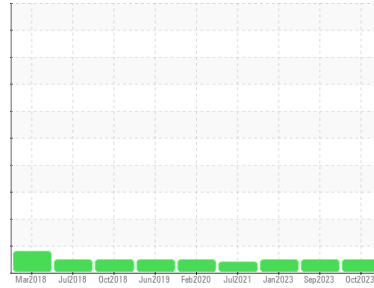

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the fluid.

### Fluid Condition

The condition of the fluid is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0084846</b>	PCA0084871	PCA0037168
Sample Date	Client Info		<b>25 Oct 2023</b>	26 Sep 2023	13 Jan 2023
Machine Age	hrs	Client Info	<b>44859</b>	44539	43576
Oil Age	hrs	Client Info	<b>1200</b>	300	1200
Oil Changed	Client Info		<b>Changed</b>	Not Changd	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >200	<b>6</b>	3	6
Chromium	ppm	ASTM D5185m >5	<b>0</b>	0	<1
Nickel	ppm	ASTM D5185m >5	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m >7	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m >25	<b>1</b>	1	0
Lead	ppm	ASTM D5185m >45	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185m >225	<b>8</b>	4	8
Tin	ppm	ASTM D5185m >10	<b>0</b>	<1	<1
Antimony	ppm	ASTM D5185m	<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>3</b>	<1	<1
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>2</b>	<1	4
Manganese	ppm	ASTM D5185m	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m	<b>42</b>	39	67
Calcium	ppm	ASTM D5185m	<b>2503</b>	3097	2588
Phosphorus	ppm	ASTM D5185m	<b>738</b>	949	847
Zinc	ppm	ASTM D5185m	<b>990</b>	1170	1043
Sulfur	ppm	ASTM D5185m	<b>3154</b>	3661	3919


## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >125	<b>6</b>	6	4
Sodium	ppm	ASTM D5185m	<b>1</b>	0	1
Potassium	ppm	ASTM D5185m >20	<b>0</b>	0	0

## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual >0.1	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual	<b>NEG</b>	NEG	NEG









# OIL ANALYSIS REPORT

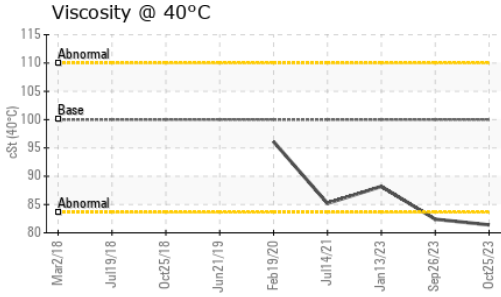

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	100	<b>81.4</b>	82.4	88.2

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

## GRAPHS

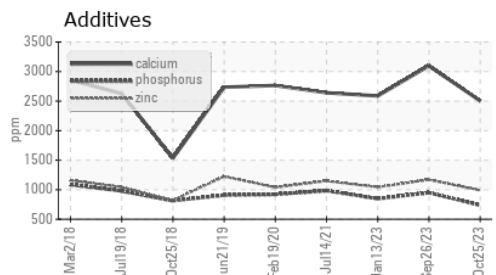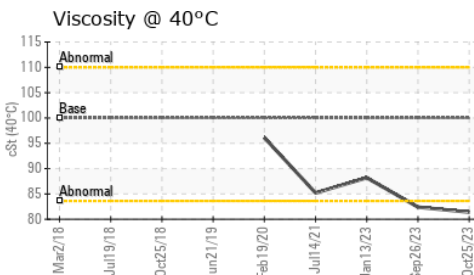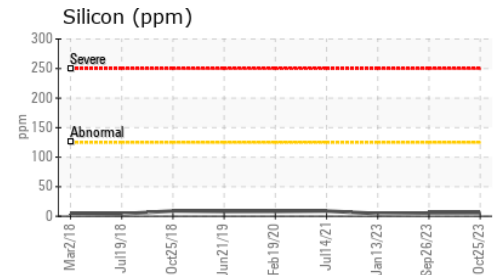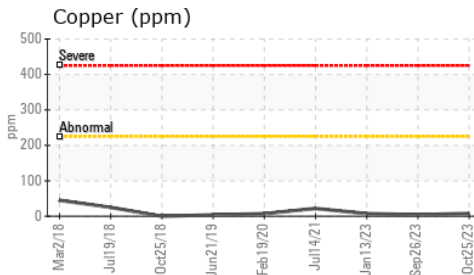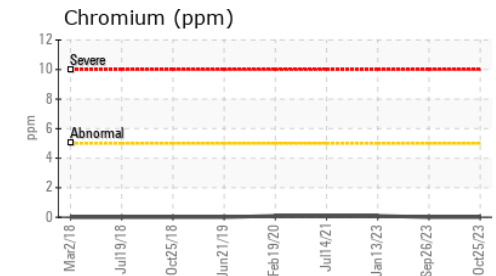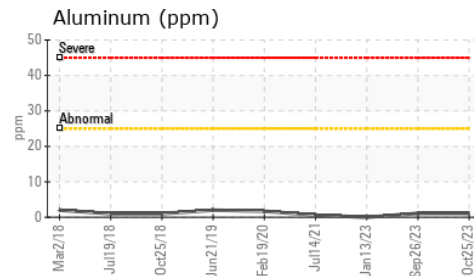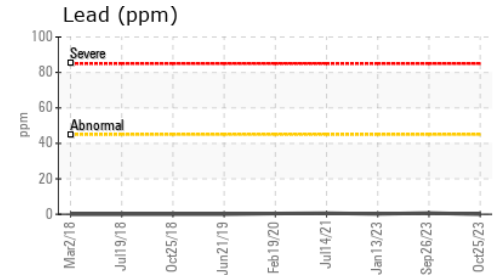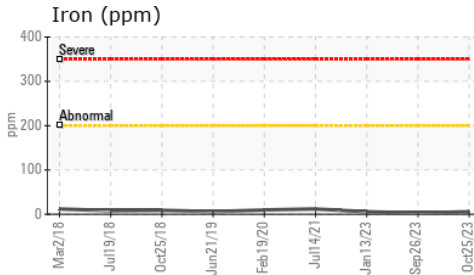

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0084846  
**Lab Number** : 06000150  
**Unique Number** : 10728510  
**Test Package** : MOB 1

**Kemp Quarries - River Valley - Backbone**  
 5600 S Hwy 253  
 Huntington, AR  
 US 72940

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

backbone@rivervalleyquarries.com

T:  
F: