




PROBLEM SUMMARY

Sample Rating Trend

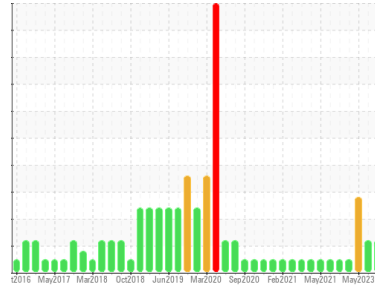

FUEL




Machine Id
10670

Component
Diesel Engine


Fluid
PETRO CANADA DURON SHP 15W40 (7 GAL)

COMPONENT CONDITION SUMMARY

▲ Fuel Dilution

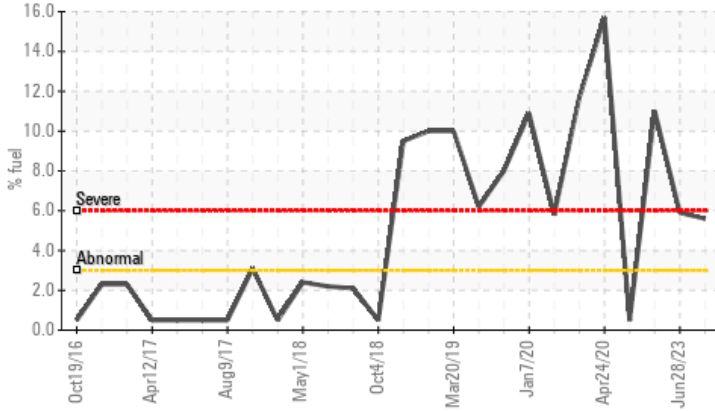

▲ Viscosity @ 100°C

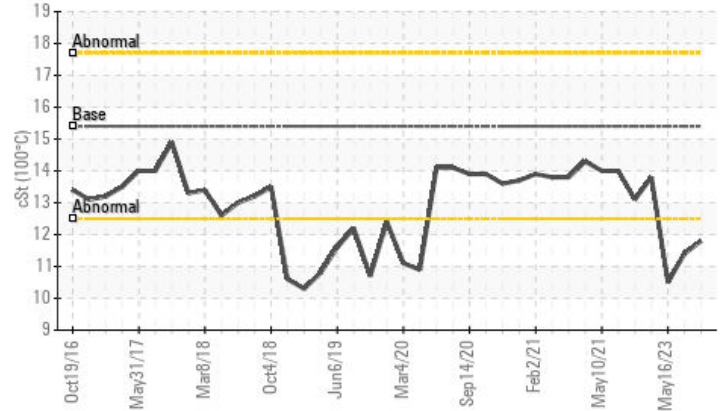

RECOMMENDATION

The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				ABNORMAL	ABNORMAL	SEVERE
Fuel	%	ASTM D3524	>3.0	▲ 5.6	▲ 5.9	● 11.0
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 11.8	▲ 11.4	● 10.5

Customer Id: GFL015
Sample No.: GFL0091191
Lab Number: 06000236
Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
Wes Davis +1 905-569-8600 x223
wesd@wearcheck.ca

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Resample	---	---	?	We recommend an early resample to monitor this condition.

HISTORICAL DIAGNOSIS

28 Jun 2023 Diag: Wes Davis

FUEL



We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

view report



16 May 2023 Diag: Wes Davis

FUEL



We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

view report



10 Feb 2023 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

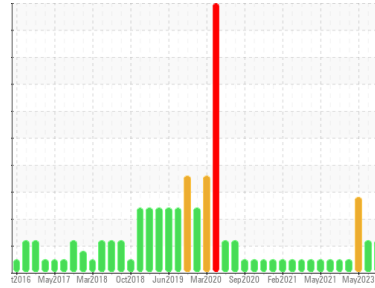

FUEL



Machine Id
10670

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (7 GAL)

DIAGNOSIS

Recommendation

The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0091191	GFL0057568	GFL0057608
Sample Date	Client Info	31 Oct 2023	28 Jun 2023	16 May 2023
Machine Age	hrs	3996	1727	42253
Oil Age	hrs	2504	0	1561
Oil Changed	Client Info	Changed	N/A	N/A
Sample Status		ABNORMAL	ABNORMAL	SEVERE

CONTAMINATION

method	limit/base	current	history1	history2
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >75	5	9	55
Chromium	ppm	ASTM D5185m >5	<1	<1	2
Nickel	ppm	ASTM D5185m >4	<1	0	<1
Titanium	ppm	ASTM D5185m >2	<1	<1	0
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >15	2	<1	6
Lead	ppm	ASTM D5185m >25	<1	0	1
Copper	ppm	ASTM D5185m >100	<1	<1	<1
Tin	ppm	ASTM D5185m >4	0	0	1
Vanadium	ppm	ASTM D5185m	0	0	<1
Cadmium	ppm	ASTM D5185m	<1	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 0	23	22	25
Barium	ppm	ASTM D5185m 0	5	14	0
Molybdenum	ppm	ASTM D5185m 60	68	59	59
Manganese	ppm	ASTM D5185m 0	<1	0	<1
Magnesium	ppm	ASTM D5185m 1010	568	778	750
Calcium	ppm	ASTM D5185m 1070	1239	999	953
Phosphorus	ppm	ASTM D5185m 1150	940	887	876
Zinc	ppm	ASTM D5185m 1270	1044	1109	1081
Sulfur	ppm	ASTM D5185m 2060	3201	3265	3104

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	4	3	7
Sodium	ppm	ASTM D5185m	<1	4	44
Potassium	ppm	ASTM D5185m >20	2	1	2
Fuel	%	ASTM D3524 >3.0	▲ 5.6	▲ 5.9	■ 11.0

INFRA-RED

method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >6	0.2	0.3	1.9
Nitration	Abs/cm	*ASTM D7624 >20	7.5	6.9	10.9
Sulfation	Abs/.1mm	*ASTM D7415 >30	18.0	17.9	22.1


FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	13.7	12.9	16.5
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	7.6	7.8	7.2




OIL ANALYSIS REPORT


▲ Fuel Dilution

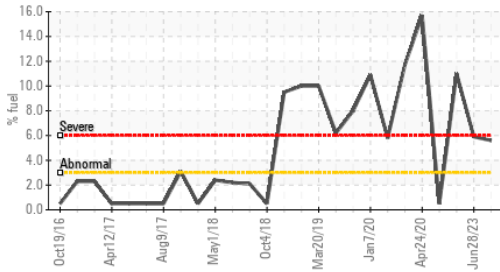

▲ Viscosity @ 100°C

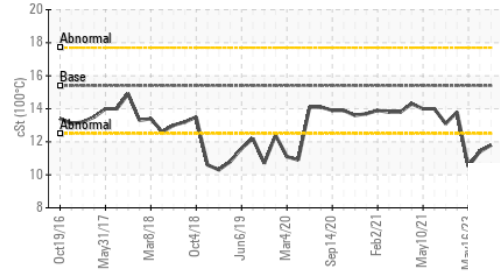

Base Number

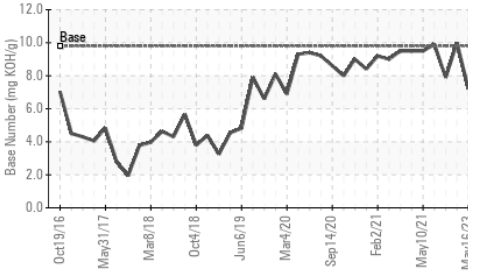


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4 ▲ 11.8	▲ 11.4	● 10.5

GRAPHS


Ferrous Alloys

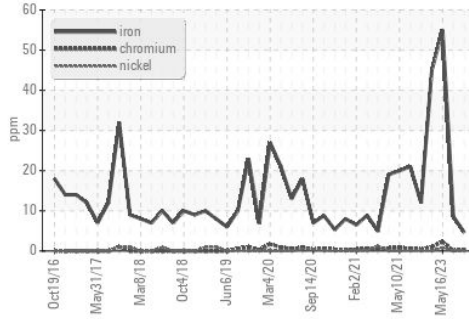


Non-ferrous Metals

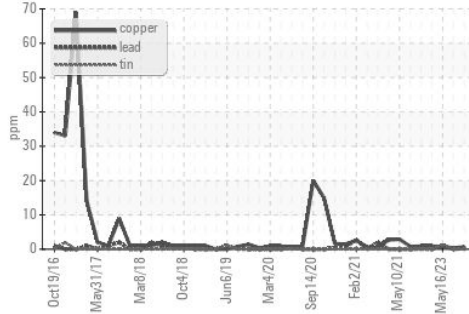

▲ Viscosity @ 100°C

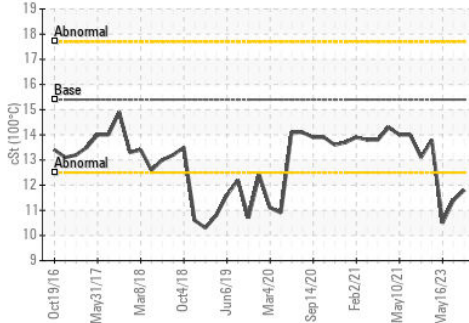

Base Number

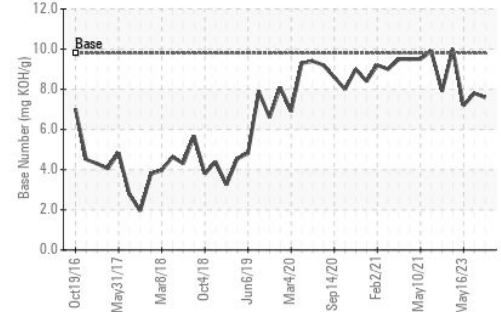

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0091191 Received : 07 Nov 2023
 Lab Number : 06000236 Diagnosed : 08 Nov 2023
 Unique Number : 10728596 Diagnostician : Wes Davis
 Test Package : FLEET (Additional Tests: PercentFuel)

GFL Environmental - 015 - Columbia
 7800 Farrow Road
 Columbia, SC
 US 29203-3219
 Contact: NOEL MATTHEWS
 nmatthewsjr@gflenv.com
 T: (803)935-0249
 F: (803)935-0244

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)