




# OIL ANALYSIS REPORT

Sample Rating Trend

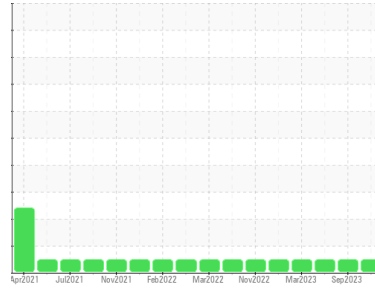

**NORMAL**



Machine Id  
**810019**

Component  
**Diesel Engine**

Fluid  
**DIESEL ENGINE OIL SAE 15W40 (38 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0085167</b>	GFL0071618	GFL0071554
Sample Date	Client Info		<b>02 Nov 2023</b>	15 Sep 2023	21 Jun 2023
Machine Age	hrs	Client Info	<b>0</b>	0	0
Oil Age	hrs	Client Info	<b>600</b>	600	600
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >90	<b>18</b>	13	16
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	2
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	1
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	2
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	1
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	6	7
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	0	5
Copper	ppm	ASTM D5185m >330	<b>2</b>	1	3
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	0	2
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	1
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	2

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	<b>5</b>	4	1
Barium	ppm	ASTM D5185m 10	<b>5</b>	0	18
Molybdenum	ppm	ASTM D5185m 100	<b>62</b>	80	48
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	2
Magnesium	ppm	ASTM D5185m 450	<b>885</b>	1178	729
Calcium	ppm	ASTM D5185m 3000	<b>1099</b>	1344	809
Phosphorus	ppm	ASTM D5185m 1150	<b>1058</b>	1280	771
Zinc	ppm	ASTM D5185m 1350	<b>1206</b>	1586	960
Sulfur	ppm	ASTM D5185m 4250	<b>3134</b>	4230	2627

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>7</b>	8	7
Sodium	ppm	ASTM D5185m >158	<b>2</b>	5	5
Potassium	ppm	ASTM D5185m >20	<b>5</b>	8	11

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >6	<b>0.7</b>	0.4	0.7
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.3</b>	6.7	9.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.7</b>	18.0	20.9

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.1</b>	13.7	16.9
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	<b>8.0</b>	8.5	8.5







# OIL ANALYSIS REPORT

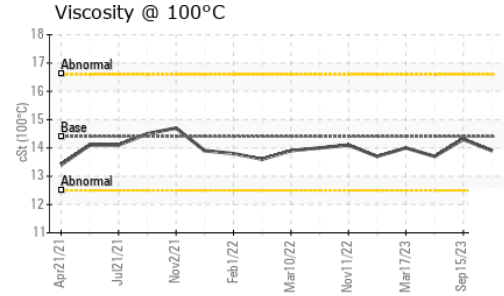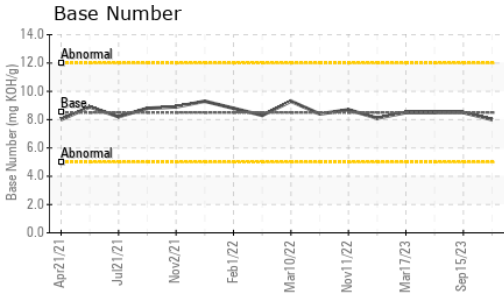

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.9</b>	14.3	13.7

## GRAPHS

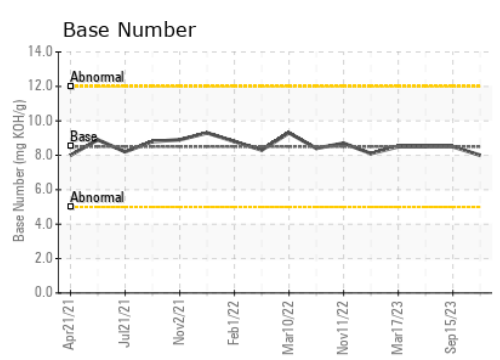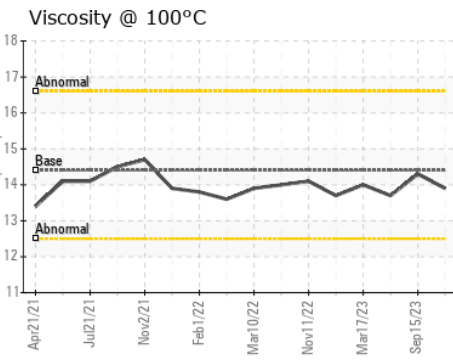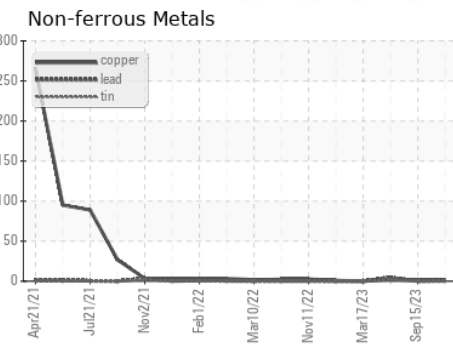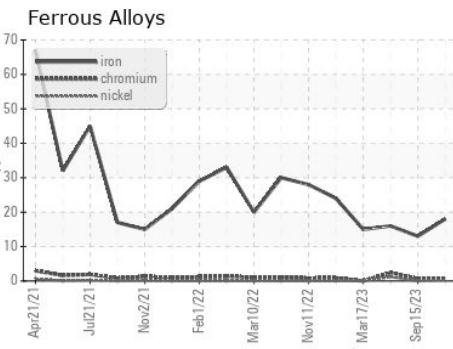

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0085167  
**Lab Number** : 06000242  
**Unique Number** : 10728602  
**Test Package** : FLEET  
**Received** : 07 Nov 2023  
**Diagnosed** : 07 Nov 2023  
**Diagnostician** : Wes Davis

**GFL Environmental - 035 - Greensboro**  
 1236 Elon Place  
 High Point, NC  
 US 27263  
 Contact: JORGE COSTA  
 jorge.costa@gflenv.com  
 T: (336)668-3712  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)