

## **OIL ANALYSIS REPORT**

Sample Rating Trend





SAMPLE INFORMATION method limit/base current history1 history2



Machine Id **413065** Component **1 Differential** Fluid

### GEAR OIL SAE 80W90 (--- GAL)

# DIAGNOSIS

**Recommendation** Resample at the next service interval to monitor. (

Customer Sample Comment: 1st Axle / Pusher )

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.


SAMPLE INFOR		methoa	iimit/base		nistory i	nistory∠
Sample Number		Client Info		GFL0094111		
Sample Date		Client Info		02 Nov 2023		
Machine Age	hrs	Client Info		32468		
Dil Age	hrs	Client Info		32468		
Dil Changed		Client Info		Changed		
Sample Status				NORMAL		
	0		11 11 /			
WEAR METAL	-8	method	limit/base	current	history1	history2
ron	ppm	ASTM D5185m	>870	83		
Chromium	ppm	ASTM D5185m	>8	<1		
Nickel	ppm	ASTM D5185m	>25	3		
Fitanium	ppm	ASTM D5185m	>4	0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>40	<1		
_ead	ppm	ASTM D5185m	>25	0		
Copper	ppm	ASTM D5185m	>60	<1		
Fin	ppm	ASTM D5185m	>5	0		
/anadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	400	240		
Barium	ppm	ASTM D5185m	200	0		
Molybdenum	ppm	ASTM D5185m	12	0		
Manganese	ppm	ASTM D5185m	12	2		
Magnesium	ppm	ASTM D5185m	12	2		
Calcium	ppm	ASTM D5185m	150	17		
Phosphorus	ppm	ASTM D5185m	1650	897		
Zinc	ppm	ASTM D5185m	125	11		
Sulfur	ppm	ASTM D5185m	22500	19862		
CONTAMINAN	115	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>285	55		
Sodium	ppm	ASTM D5185m	>170	4		
Potassium	ppm	ASTM D5185m	>20	<1		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	NONE		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>.2	NEG		
Free Water	scalar	*Visual		NEG		
FLUID PROPE	RTIES	method	limit/base	current	history1	history2
					- Instory I	
/isc @ 40°C	cSt	ASTM D445	143	128 Cultura inte		
2.441 ROV. 1				Supporte		

Report Id: GFL983 [WUSCAR] 06000758 (Generated: 11/13/2023 03:42:49) Rev: 1

Submitted By: TECHNICIAN ACCOUNT



# **OIL ANALYSIS REPORT**

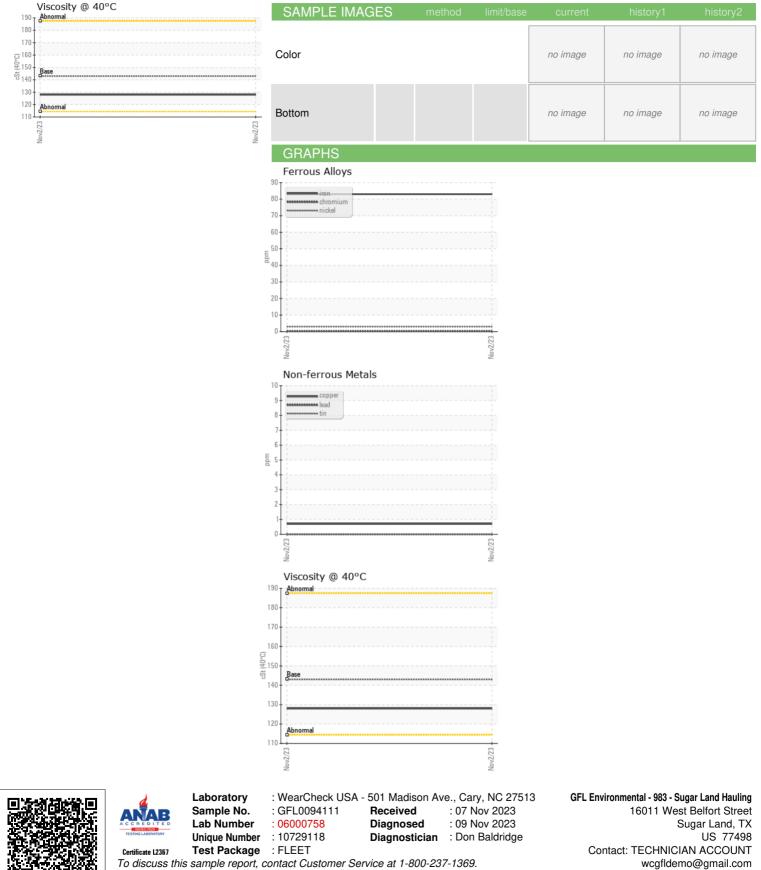

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Submitted By: TECHNICIAN ACCOUNT

Т:

F: