

# **OIL ANALYSIS REPORT**

# Sample Rating Trend WEAR

# NOT GIVEN PCA0100875

Component

**Diesel Engine** 

PETRO CANADA DURON SHP 10W30 (--- QTS)

### **DIAGNOSIS**

### Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

The aluminum level is abnormal. All other component wear rates are normal.

### Contamination

There is no indication of any contamination in the


### **Fluid Condition**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

| (TS)             |          |             |            | Sep2023     |          |          |
|------------------|----------|-------------|------------|-------------|----------|----------|
| SAMPLE INFOR     | MATION   | method      | limit/base | current     | history1 | history2 |
| Sample Number    |          | Client Info |            | PCA0100875  |          |          |
| Sample Date      |          | Client Info |            | 22 Sep 2023 |          |          |
| Machine Age      | mls      | Client Info |            | 137599      |          |          |
| Oil Age          | mls      | Client Info |            | 0           |          |          |
| Oil Changed      |          | Client Info |            | Changed     |          |          |
| Sample Status    |          |             |            | ABNORMAL    |          |          |
| CONTAMINAT       | ION      | method      | limit/base | current     | history1 | history2 |
| Fuel             |          | WC Method   | >5         | <1.0        |          |          |
| Glycol           |          | WC Method   |            | NEG         |          |          |
| WEAR METAL       | S        | method      | limit/base | current     | history1 | history2 |
| Iron             | ppm      | ASTM D5185m | >100       | 55          |          |          |
| Chromium         | ppm      | ASTM D5185m | >20        | 5           |          |          |
| Nickel           | ppm      | ASTM D5185m | >4         | <1          |          |          |
| Titanium         | ppm      | ASTM D5185m |            | 0           |          |          |
| Silver           | ppm      | ASTM D5185m | >3         | 0           |          |          |
| Aluminum         | ppm      | ASTM D5185m | >20        | <u>^</u> 26 |          |          |
| Lead             | ppm      | ASTM D5185m | >40        | 0           |          |          |
| Copper           | ppm      | ASTM D5185m | >330       | 82          |          |          |
| Tin              | ppm      | ASTM D5185m | >15        | 0           |          |          |
| Vanadium         | ppm      | ASTM D5185m |            | 0           |          |          |
| Cadmium          | ppm      | ASTM D5185m |            | 0           |          |          |
| ADDITIVES        |          | method      | limit/base | current     | history1 | history2 |
| Boron            | ppm      | ASTM D5185m | 2          | 3           |          |          |
| Barium           | ppm      | ASTM D5185m | 0          | <1          |          |          |
| Molybdenum       | ppm      | ASTM D5185m | 50         | 64          |          |          |
| Manganese        | ppm      | ASTM D5185m | 0          | 1           |          |          |
| Magnesium        | ppm      | ASTM D5185m | 950        | 864         |          |          |
| Calcium          | ppm      | ASTM D5185m | 1050       | 1286        |          |          |
| Phosphorus       | ppm      | ASTM D5185m | 995        | 919         |          |          |
| Zinc             | ppm      | ASTM D5185m | 1180       | 1225        |          |          |
| Sulfur           | ppm      | ASTM D5185m | 2600       | 2440        |          |          |
| CONTAMINAN       | NTS      | method      | limit/base | current     | history1 | history2 |
| Silicon          | ppm      | ASTM D5185m | >25        | 9           |          |          |
| Sodium           | ppm      | ASTM D5185m |            | 4           |          |          |
| Potassium        | ppm      | ASTM D5185m | >20        | 18          |          |          |
| INFRA-RED        |          | method      | limit/base | current     | history1 | history2 |
| Soot %           | %        | *ASTM D7844 | >3         | 1.3         |          |          |
| Nitration        | Abs/cm   | *ASTM D7624 | >20        | 12.7        |          |          |
| Sulfation        | Abs/.1mm | *ASTM D7415 | >30        | 24.6        |          |          |
| FLUID DEGRA      | DATION   | method      | limit/base | current     | history1 | history2 |
| Oxidation        | Abs/.1mm | *ASTM D7414 | >25        | 23.2        |          |          |
| Base Number (BN) | mg KOH/g | ASTM D2896  |            | 5.5         |          |          |
| . , ,            | -        |             |            |             |          |          |



## **OIL ANALYSIS REPORT**

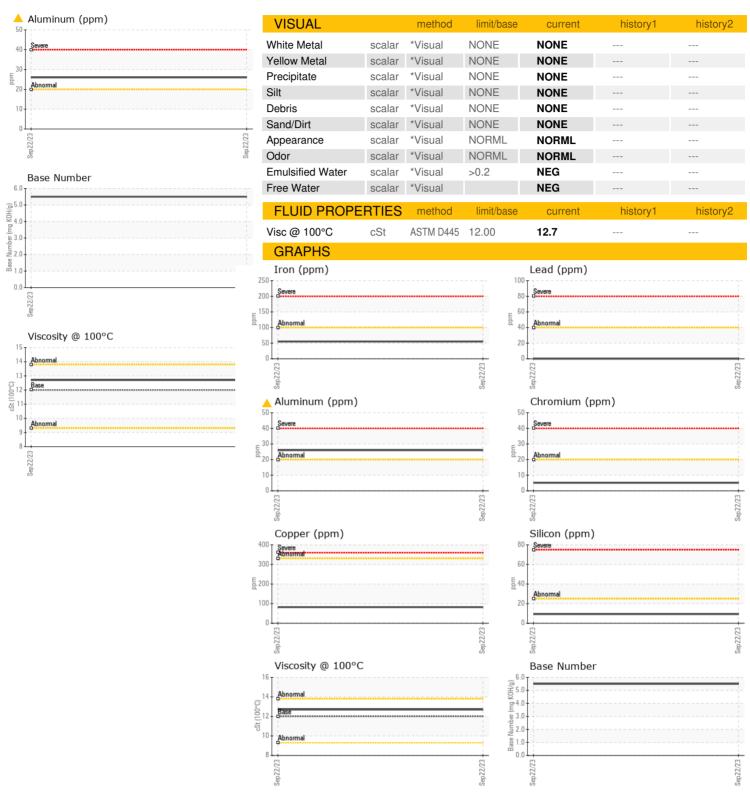



Certificate L2367

Laboratory Sample No. Lab Number **Unique Number** 

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : PCA0100875 : 06001278

: 10729638

Received Diagnosed : 08 Nov 2023 : 09 Nov 2023

Test Package : MOB 1 ( Additional Tests: TBN )

Diagnostician : Jonathan Hester

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**MILLER TRUCK LEASING #114** 

**63 REPAUPO STATION ROAD** LOGAN TOWNSHIP, NJ US 08085

Contact: ED DAVIS

edavis@millertransgroup.com T: (856)214-3521

Contact/Location: ED DAVIS - MILLOG

F: (856)214-3663