


# **OIL ANALYSIS REPORT**

Samp



NORMAL



Machine Id **324206** 

Component **Diesel Engine** 

PETRO CANADA DURON SHP 10W30 (--- QTS)

# DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

#### Wear

Metal levels are typical for a new component breaking in.

## Contamination

There is no indication of any contamination in the


## **Fluid Condition**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION   method   limit/base   current   history1   history2							
Sample Number   Client Info   PCA0105773	rts)				Oct2023		
Sample Date   Client Info   24 Oct 2023	SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Machine Age   mls   Client Info   6527	Sample Number		Client Info		PCA0105773		
Coli Age	Sample Date		Client Info		24 Oct 2023		
Contamped   Client Info   Normal   Changed   Contamped   Normal   Contamped   Contamped	Machine Age	mls	Client Info		44391		
CONTAMINATION	Oil Age	mls	Client Info		6527		
CONTAMINATION	Oil Changed		Client Info		Changed		
Fuel	Sample Status				NORMAL		
WEAR METALS	CONTAMINAT	ION	method	limit/base	current	history1	history2
WEAR METALS         method         limit/base         current         history1         history2           Iron         ppm         ASTM D5185m         >20         2             Chromium         ppm         ASTM D5185m         >20         2             Nickel         ppm         ASTM D5185m         >4         0             Silver         ppm         ASTM D5185m         >3         0             Aluminum         ppm         ASTM D5185m         >20         12             Lead         ppm         ASTM D5185m         >20         12             Lead         ppm         ASTM D5185m         >20         12             Lead         ppm         ASTM D5185m         >33.0         4             Copper         ppm         ASTM D5185m         0             Cadmium         ppm         ASTM D5185m         0             Cadmium         ppm         ASTM D5185m         0         64	Fuel		WC Method	>5	<1.0		
Chromium	Glycol		WC Method		NEG		
Chromium	WEAR METAL	.S	method	limit/base	current	history1	history2
Nickel	Iron	ppm	ASTM D5185m	>100	37		
Titanium	Chromium		ASTM D5185m	>20	2		
Description	Nickel		ASTM D5185m	>4	0		
Silver	Titanium		ASTM D5185m		0		
Lead	Silver	ppm	ASTM D5185m	>3	0		
Copper	Aluminum		ASTM D5185m	>20	12		
Copper	Lead	ppm	ASTM D5185m	>40	<1		
Vanadium	Copper	ppm	ASTM D5185m	>330	4		
Vanadium         ppm         ASTM D5185m         0             Cadmium         ppm         ASTM D5185m         0             ADDITIVES         method         limit/base         current         history1         history2           Boron         ppm         ASTM D5185m         2         9             Barium         ppm         ASTM D5185m         0         0             Molybdenum         ppm         ASTM D5185m         0         64             Manganese         ppm         ASTM D5185m         0         <-1             Magnesium         ppm         ASTM D5185m         950         875             Calcium         ppm         ASTM D5185m         995         861             Zinc         ppm         ASTM D5185m         995         861             Zinc         ppm         ASTM D5185m         2600         3026             Sulfur         ppm         ASTM D5185m         25         3			ASTM D5185m	>15	<1		
ADDITIVES	Vanadium		ASTM D5185m		0		
Barium	Cadmium	ppm	ASTM D5185m		0		
Barium	ADDITIVES		method	limit/base	current	history1	history2
Molybdenum         ppm         ASTM D5185m         50         64             Manganese         ppm         ASTM D5185m         0         <1             Magnesium         ppm         ASTM D5185m         950         875             Calcium         ppm         ASTM D5185m         1050         1117             Phosphorus         ppm         ASTM D5185m         1050         1117             Zinc         ppm         ASTM D5185m         995         861             Zinc         ppm         ASTM D5185m         2600         3026             Sulfur         ppm         ASTM D5185m         2600         3026             CONTAMINANTS         method         limit/base         current         history1         history2           Silicon         ppm         ASTM D5185m         >25         3             Sodium         ppm         ASTM D5185m         >20         11             Potassium         ppm         ASTM D5185m <td>Boron</td> <td>ppm</td> <td>ASTM D5185m</td> <td>2</td> <td>9</td> <td></td> <td></td>	Boron	ppm	ASTM D5185m	2	9		
Manganese         ppm         ASTM D5185m         0         <1             Magnesium         ppm         ASTM D5185m         950         875             Calcium         ppm         ASTM D5185m         1050         1117             Phosphorus         ppm         ASTM D5185m         995         861             Zinc         ppm         ASTM D5185m         2600         3026             Sulfur         ppm         ASTM D5185m         2600         3026             CONTAMINANTS         method         limit/base         current         history1         history2           Silicon         ppm         ASTM D5185m         >25         3             Sodium         ppm         ASTM D5185m         >20         11             Potassium         ppm         ASTM D5185m         >20         11             INFRA-RED         method         limit/base         current         history1         history2           Soot %         %         *ASTM D7844	Barium	ppm	ASTM D5185m	0	0		
Magnesium         ppm         ASTM D5185m         950         875             Calcium         ppm         ASTM D5185m         1050         1117             Phosphorus         ppm         ASTM D5185m         995         861             Zinc         ppm         ASTM D5185m         1180         1123             Sulfur         ppm         ASTM D5185m         2600         3026             CONTAMINANTS         method         limit/base         current         history1         history2           Silicon         ppm         ASTM D5185m         >25         3             Sodium         ppm         ASTM D5185m         2             Potassium         ppm         ASTM D5185m         >20         11             INFRA-RED         method         limit/base         current         history1         history2           Soot %         %         *ASTM D7844         >3         0.6             Sulfation         Abs/.1mm         *ASTM D7415         >30	Molybdenum	ppm	ASTM D5185m	50	64		
Calcium         ppm         ASTM D5185m         1050         1117             Phosphorus         ppm         ASTM D5185m         995         861             Zinc         ppm         ASTM D5185m         1180         1123             Sulfur         ppm         ASTM D5185m         2600         3026             CONTAMINANTS         method         limit/base         current         history1         history2           Silicon         ppm         ASTM D5185m         >25         3             Sodium         ppm         ASTM D5185m         >20         11             Potassium         ppm         ASTM D5185m         >20         11             INFRA-RED         method         limit/base         current         history1         history2           Soot %         %         *ASTM D7844         >3         0.6             Sulfation         Abs/.1mm         *ASTM D7415         >30         20.0             FLUID DEGRADATION         method         lim	Manganese	ppm	ASTM D5185m	0	<1		
Phosphorus	Magnesium	ppm	ASTM D5185m	950	875		
Zinc   ppm   ASTM D5185m   1180   1123           Sulfur   ppm   ASTM D5185m   2600   3026         CONTAMINANTS   method   limit/base   current   history1   history2     Silicon   ppm   ASTM D5185m   >25   3         Sodium   ppm   ASTM D5185m   2         Potassium   ppm   ASTM D5185m   >20   11         INFRA-RED   method   limit/base   current   history1   history2     Soot %   *ASTM D7844   >3   0.6         Nitration   Abs/cm   *ASTM D7624   >20   9.6         Sulfation   Abs/.1mm   *ASTM D7415   >30   20.0         FLUID DEGRADATION   method   limit/base   current   history1   history2     Oxidation   Abs/.1mm   *ASTM D7414   >25   16.3	Calcium	ppm	ASTM D5185m	1050	1117		
Sulfur         ppm         ASTM D5185m         2600         3026             CONTAMINANTS         method         limit/base         current         history1         history2           Silicon         ppm         ASTM D5185m         >25         3             Sodium         ppm         ASTM D5185m         2              Potassium         ppm         ASTM D5185m         >20         11             INFRA-RED         method         limit/base         current         history1         history2           Soot %         %         *ASTM D7844         >3         0.6             Nitration         Abs/cm         *ASTM D7624         >20         9.6             Sulfation         Abs/.1mm         *ASTM D7415         >30         20.0             FLUID DEGRADATION         method         limit/base         current         history1         history2           Oxidation         Abs/.1mm         *ASTM D7414         >25         16.3	Phosphorus	ppm	ASTM D5185m	995	861		
CONTAMINANTS         method         limit/base         current         history1         history2           Silicon         ppm         ASTM D5185m         >25         3             Sodium         ppm         ASTM D5185m         2             Potassium         ppm         ASTM D5185m         >20         11             INFRA-RED         method         limit/base         current         history1         history2           Soot %         %         *ASTM D7844         >3         0.6             Nitration         Abs/cm         *ASTM D7624         >20         9.6             Sulfation         Abs/.1mm         *ASTM D7415         >30         20.0             FLUID DEGRADATION         method         limit/base         current         history1         history2           Oxidation         Abs/.1mm         *ASTM D7414         >25         16.3	Zinc	ppm	ASTM D5185m	1180	1123		
Silicon   ppm   ASTM D5185m   >25   3	Sulfur	ppm	ASTM D5185m	2600	3026		
Sodium	CONTAMINAN	ITS	method	limit/base	current	history1	history2
Potassium         ppm         ASTM D5185m         >20         11             INFRA-RED         method         limit/base         current         history1         history2           Soot %         %         *ASTM D7844         >3         0.6             Nitration         Abs/cm         *ASTM D7624         >20         9.6             Sulfation         Abs/.1mm         *ASTM D7415         >30         20.0             FLUID DEGRADATION         method         limit/base         current         history1         history2           Oxidation         Abs/.1mm         *ASTM D7414         >25         16.3	Silicon	ppm	ASTM D5185m	>25	3		
INFRA-RED	Sodium	ppm	ASTM D5185m		2		
Soot %         %         *ASTM D7844         >3         0.6             Nitration         Abs/cm         *ASTM D7624         >20         9.6             Sulfation         Abs/.1mm         *ASTM D7415         >30         20.0             FLUID DEGRADATION         method         limit/base         current         history1         history2           Oxidation         Abs/.1mm         *ASTM D7414         >25         16.3	Potassium	ppm	ASTM D5185m	>20	11		
Nitration         Abs/cm         *ASTM D7624         >20         9.6             Sulfation         Abs/.1mm         *ASTM D7415         >30         20.0             FLUID DEGRADATION         method         limit/base         current         history1         history2           Oxidation         Abs/.1mm         *ASTM D7414         >25         16.3	INFRA-RED		method	limit/base	current	history1	history2
Sulfation         Abs/.1mm         *ASTM D7415         >30         20.0              FLUID DEGRADATION         method         limit/base         current         history1         history2           Oxidation         Abs/.1mm         *ASTM D7414         >25         16.3	Soot %	%	*ASTM D7844	>3	0.6		
FLUID DEGRADATION method limit/base current history1 history2  Oxidation Abs/.1mm *ASTM D7414 >25 16.3	Nitration	Abs/cm	*ASTM D7624	>20	9.6		
Oxidation	Sulfation	Abs/.1mm	*ASTM D7415	>30	20.0		
	FLUID DEGRA	OITAC	method	limit/base	current	history1	history2
Base Number (BN) mg KOH/g ASTM D2896 7.9	Oxidation	Abs/.1mm	*ASTM D7414	>25	16.3		
	Base Number (BN)	mg KOH/g	ASTM D2896		7.9		



# **OIL ANALYSIS REPORT**

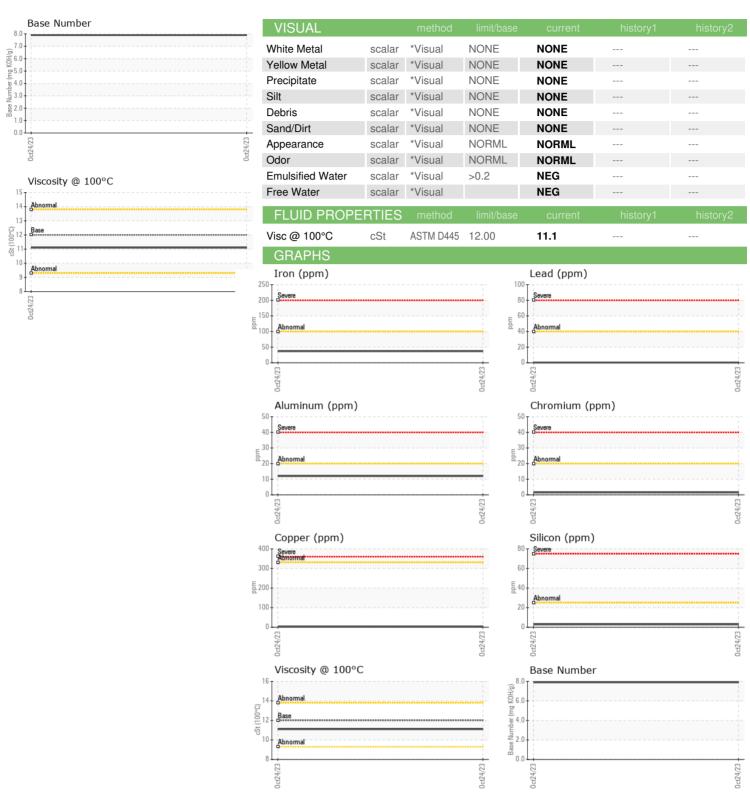



Laboratory Sample No. Lab Number **Unique Number** 

: 06001311

: PCA0105773 : 10729671

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received Diagnosed

: 08 Nov 2023 : 09 Nov 2023

Diagnostician : Wes Davis

Test Package : MOB 1 (Additional Tests: TBN) To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**MILLER TRUCK LEASING #114** 

63 REPAUPO STATION ROAD LOGAN TOWNSHIP, NJ US 08085

Contact: ED DAVIS edavis@millertransgroup.com

T: (856)214-3521 F: (856)214-3663

Report Id: MILLOG [WUSCAR] 06001311 (Generated: 11/12/2023 15:13:05) Rev: 1

Contact/Location: ED DAVIS - MILLOG