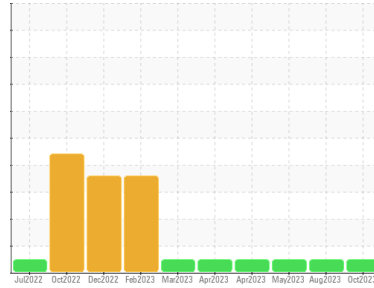


# OIL ANALYSIS REPORT

**Sample Rating Trend**

**NORMAL**

 Machine Id  
**SJB712**

 Component  
**Diesel Engine**

 Fluid  
**PETRO CANADA DURON SHP 10W30 (--- QTS)**
**DIAGNOSIS**
**Recommendation**

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

**Wear**

All component wear rates are normal.

**Contamination**

There is no indication of any contamination in the oil.

**Fluid Condition**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0105824</b>	PCA0100904	PCA0097730
Sample Date	Client Info			<b>23 Oct 2023</b>	02 Aug 2023	22 May 2023
Machine Age	mls Client Info			<b>166483</b>	163014	155292
Oil Age	mls Client Info			<b>3469</b>	4757	6502
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>9</b>	24	19
Chromium	ppm	ASTM D5185m	>20	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	4	1
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	2	<1
Copper	ppm	ASTM D5185m	>330	<b>0</b>	2	<1
Tin	ppm	ASTM D5185m	>15	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>9</b>	4	6
Barium	ppm	ASTM D5185m	0	<b>0</b>	<1	11
Molybdenum	ppm	ASTM D5185m	50	<b>60</b>	66	71
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	1	<1
Magnesium	ppm	ASTM D5185m	950	<b>863</b>	913	1013
Calcium	ppm	ASTM D5185m	1050	<b>1171</b>	1240	1226
Phosphorus	ppm	ASTM D5185m	995	<b>884</b>	1051	1130
Zinc	ppm	ASTM D5185m	1180	<b>1143</b>	1294	1387
Sulfur	ppm	ASTM D5185m	2600	<b>3220</b>	3634	3902

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>2</b>	4	4
Sodium	ppm	ASTM D5185m		<b>13</b>	31	22
Potassium	ppm	ASTM D5185m	>20	<b>5</b>	11	6

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.7</b>	2.2	2.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.2</b>	10.8	10.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.5</b>	23.1	23.8

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>13.4</b>	16.3	16.8
Base Number (BN)	mg KOH/g	ASTM D2896		<b>9.6</b>	9.6	10.9









# OIL ANALYSIS REPORT

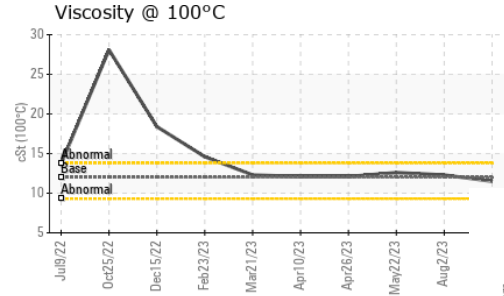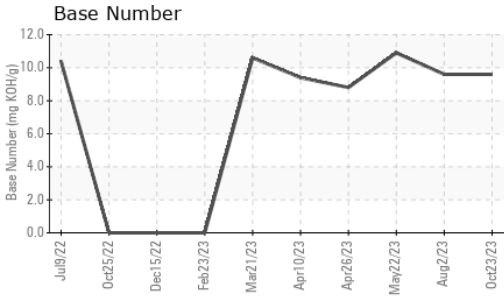

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.5	12.3

## GRAPHS

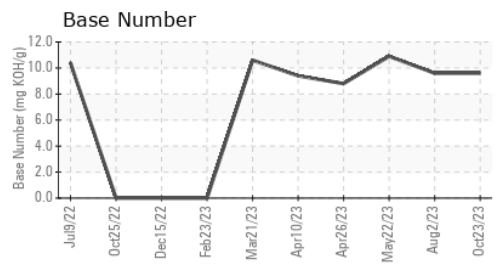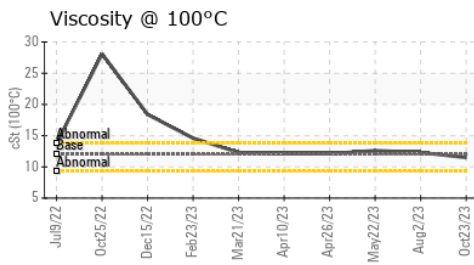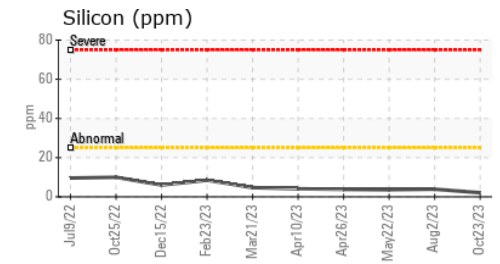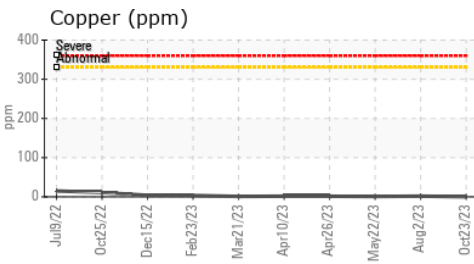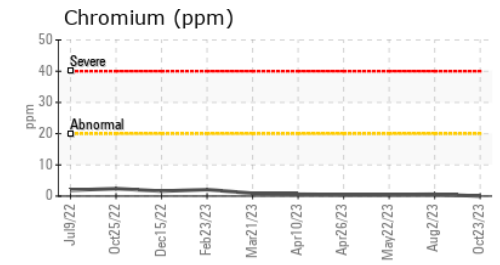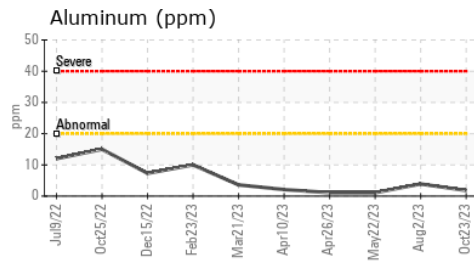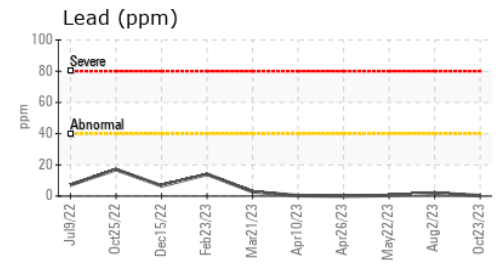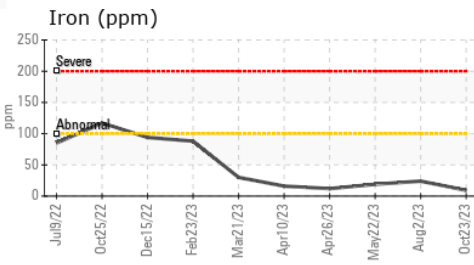

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0105824 **Received** : 08 Nov 2023  
**Lab Number** : 06001312 **Diagnosed** : 09 Nov 2023  
**Unique Number** : 10729672 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**MILLER TRUCK LEASING #114**  
 63 REPAUPO STATION ROAD  
 LOGAN TOWNSHIP, NJ  
 US 08085  
 Contact: ED DAVIS  
 edavis@millertransgroup.com  
 T: (856)214-3521  
 F: (856)214-3663

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)