


# **OIL ANALYSIS REPORT**

Sample Rating Trend







Machine Id **302156** 

Component **Diesel Engine** 

PETRO CANADA DURON SHP 10W30 (--- QTS)

## DIAGNOSIS

## Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

#### Wear

All component wear rates are normal.

## Contamination

There is no indication of any contamination in the oil.


## **Fluid Condition**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

NTS)			Oct2020	0ct2023		
SAMPLE INFOR	RMATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0105763	PCA0032476	
Sample Date		Client Info		31 Oct 2023	28 Oct 2020	
Machine Age	mls	Client Info		116539	0	
Oil Age	mls	Client Info		0	0	
Oil Changed		Client Info		Changed	Changed	
Sample Status				NORMAL	NORMAL	
CONTAMINA	TION	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0	<1.0	
Glycol		WC Method		NEG	NEG	
WEAR META	LS	method	limit/base	current	history1	history2
ron	ppm	ASTM D5185m	>100	43	39	
Chromium	ppm	ASTM D5185m	>20	2	1	
Nickel	ppm	ASTM D5185m	>4	- <1	<1	
Titanium	ppm	ASTM D5185m		<1	0	
Silver	ppm	ASTM D5185m	>3	0	0	
Aluminum	ppm	ASTM D5185m	>20	11	12	
_ead	ppm	ASTM D5185m	>40	0	0	
Copper	ppm	ASTM D5185m	>330	3	16	
Гin	ppm	ASTM D5185m	>15	1	3	
Antimony	ppm	ASTM D5185m	710		0	
√anadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	2	8	
Barium	ppm	ASTM D5185m		0	0	
Molybdenum	ppm	ASTM D5185m	50	57	57	
Manganese	ppm	ASTM D5185m		<1	2	
Magnesium	ppm	ASTM D5185m	950	879	920	
Calcium	ppm	ASTM D5185m	1050	1211	1078	
Phosphorus	ppm	ASTM D5185m	995	813	920	
Zinc	ppm	ASTM D5185m		1108	1217	
Sulfur	ppm	ASTM D5185m	2600	2992	2485	
CONTAMINA	NTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	7	4	
Sodium	ppm	ASTM D5185m		5	3	
Potassium	ppm	ASTM D5185m	>20	10	30	
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	1.3	0.7	
Nitration	Abs/cm	*ASTM D7624		13.3	10.8	
Sulfation	Abs/.1mm	*ASTM D7415		26.0	22.3	
FLUID DEGRA	ADATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	22.7	17.9	
Base Number (BN)		ASTM D2896	>L0	6.4		
Dasc Namber (DIN)	ilig Norly	AUTIVI DZ000		0.7		



## **OIL ANALYSIS REPORT**

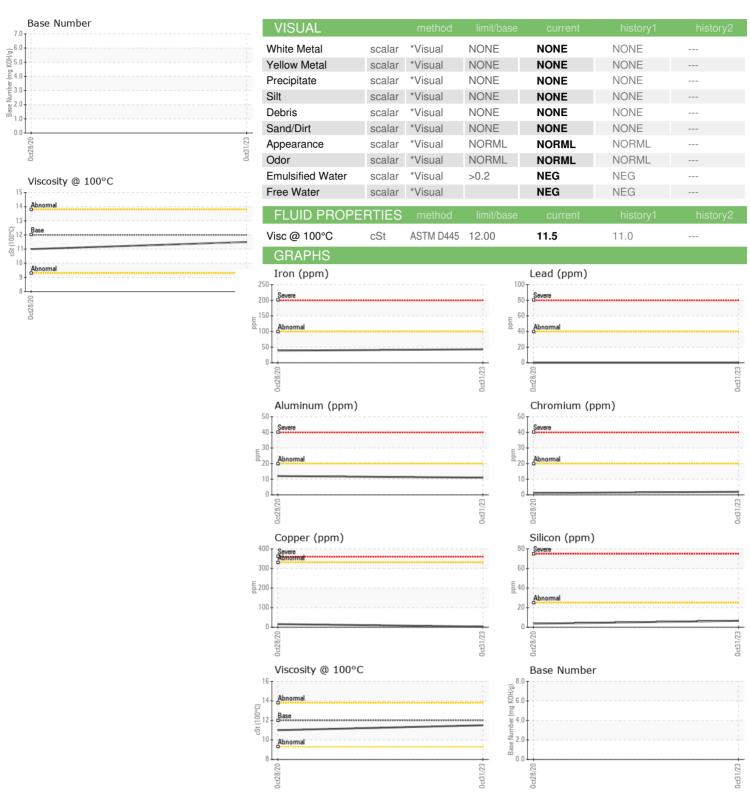





Laboratory Sample No. Lab Number **Unique Number** 

: PCA0105763 : 06001325 : 10729685

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 08 Nov 2023 Diagnosed

: 09 Nov 2023 Diagnostician : Wes Davis

Test Package : MOB 1 ( Additional Tests: TBN )

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**MILLER TRUCK LEASING #114** 

63 REPAUPO STATION ROAD LOGAN TOWNSHIP, NJ

Contact/Location: ED DAVIS - MILLOG

US 08085 Contact: ED DAVIS

edavis@millertransgroup.com

T: (856)214-3521 F: (856)214-3663