

# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**


Area  
**FLEET**  
 Machine Id  
**VOLVO VNL 26540 (S/N 992205)**  
 Component  
**Main Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 30 (36 QTS)**


**DIAGNOSIS**
**Recommendation**

No corrective action is recommended at this time. Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DIESEL ENGINE OIL SAE 30. Please confirm.

**Wear**

All component wear rates are normal.

**Contamination**

Fuel content negligible. There is no indication of any contamination in the oil.

**Fluid Condition**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0108126</b>	---	---
Sample Date	Client Info			<b>24 Oct 2023</b>	---	---
Machine Age	mls Client Info			<b>513189</b>	---	---
Oil Age	mls Client Info			<b>40000</b>	---	---
Oil Changed	Client Info			<b>Changed</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Glycol	WC Method			<b>NEG</b>	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>23</b>	---	---
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m		<b>6</b>	---	---
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	---	---
Aluminum	ppm	ASTM D5185m	>25	<b>6</b>	---	---
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185m	>330	<b>3</b>	---	---
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	---	---




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	<b>7</b>	---	---
Barium	ppm	ASTM D5185m	10	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m	100	<b>52</b>	---	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m	450	<b>822</b>	---	---
Calcium	ppm	ASTM D5185m	3000	<b>1137</b>	---	---
Phosphorus	ppm	ASTM D5185m	1150	<b>943</b>	---	---
Zinc	ppm	ASTM D5185m	1350	<b>1199</b>	---	---
Sulfur	ppm	ASTM D5185m	4250	<b>2984</b>	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>7</b>	---	---
Sodium	ppm	ASTM D5185m	>75	<b>9</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	---	---
Fuel	%	ASTM D3524	>6.0	<b>0.4</b>	---	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	---	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.3</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.4</b>	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>15.7</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>7.6</b>	---	---





# OIL ANALYSIS REPORT

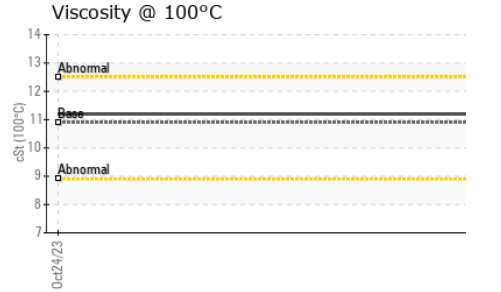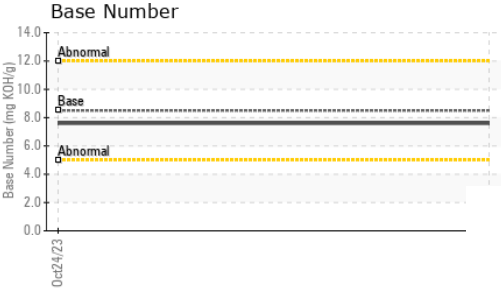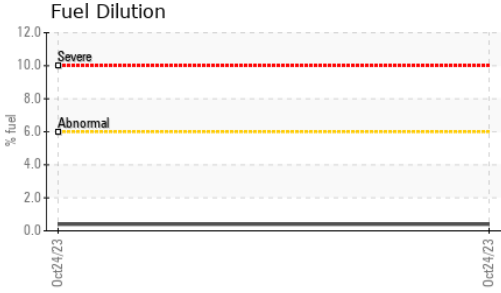

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	10.9	11.2	---

## GRAPHS

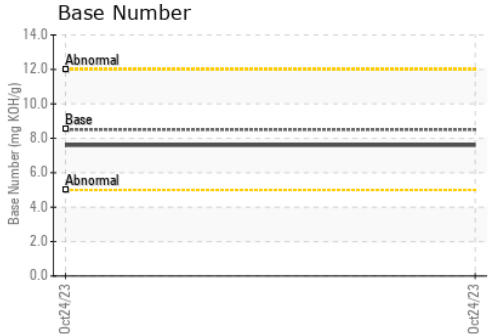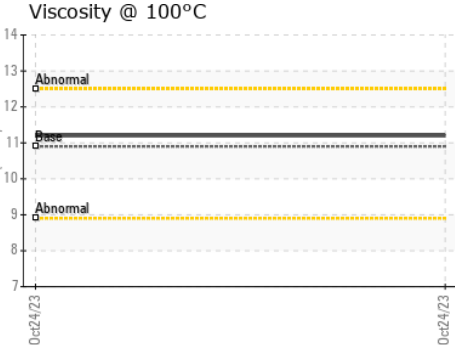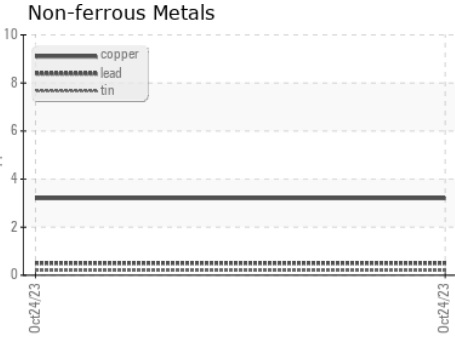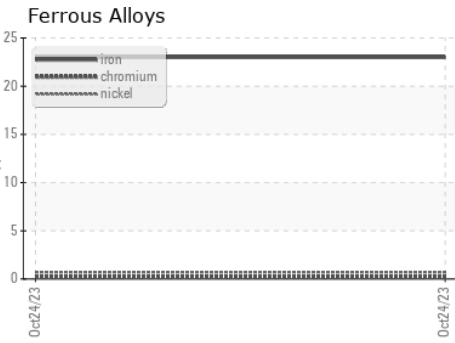

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0108126 **Received** : 08 Nov 2023  
**Lab Number** : 06001394 **Diagnosed** : 09 Nov 2023  
**Unique Number** : 10729754 **Diagnostician** : Wes Davis  
**Test Package** : FLEET ( Additional Tests: FuelDilution, PercentFuel )

**PERDUE FARMS - DILLON**  
 2047 HWY 9 WEST  
 DILLON, SC  
 US 29536  
 Contact: KEVIN HOOKS  
 kevin.hooks@perdue.com  
 T: (843)841-8069  
 F: (843)841-8070

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)