

OIL ANALYSIS REPORT

Sample Rating Trend



WEAR



Machine Id
FLORY H-8770 H-12 (S/N 4031454)

Component
Diesel Engine

Fluid
PETRO CANADA DURON HP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. (Customer Sample Comment: Checking for fuel dilution)

Wear

Cylinder, crank, or cam shaft wear is indicated.

Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0096372	---	---
Sample Date	Client Info	10 Oct 2023	---	---
Machine Age	hrs	Client Info	3111	---
Oil Age	hrs	Client Info	250	---
Oil Changed	Client Info	Changed	---	---
Sample Status		ABNORMAL	---	---

CONTAMINATION

method	limit/base	current	history1	history2
Glycol	WC Method	NEG	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	▲ 118	---
Chromium	ppm	ASTM D5185m >20	1	---
Nickel	ppm	ASTM D5185m >4	0	---
Titanium	ppm	ASTM D5185m	<1	---
Silver	ppm	ASTM D5185m >3	0	---
Aluminum	ppm	ASTM D5185m >20	6	---
Lead	ppm	ASTM D5185m >40	0	---
Copper	ppm	ASTM D5185m >330	1	---
Tin	ppm	ASTM D5185m >15	0	---
Vanadium	ppm	ASTM D5185m	0	---
Cadmium	ppm	ASTM D5185m	0	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	4	---
Barium	ppm	ASTM D5185m	0	---
Molybdenum	ppm	ASTM D5185m	63	---
Manganese	ppm	ASTM D5185m	<1	---
Magnesium	ppm	ASTM D5185m	987	---
Calcium	ppm	ASTM D5185m	1115	---
Phosphorus	ppm	ASTM D5185m	1052	---
Zinc	ppm	ASTM D5185m	1335	---
Sulfur	ppm	ASTM D5185m	2959	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	11	---
Sodium	ppm	ASTM D5185m	6	---
Potassium	ppm	ASTM D5185m >20	<1	---
Fuel	%	ASTM D3524 >5	0.3	---


INFRA-RED

method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.3	---
Nitration	Abs/cm	*ASTM D7624 >20	10.1	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	19.9	---


FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	17.6	---
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	8.1	---


OIL ANALYSIS REPORT

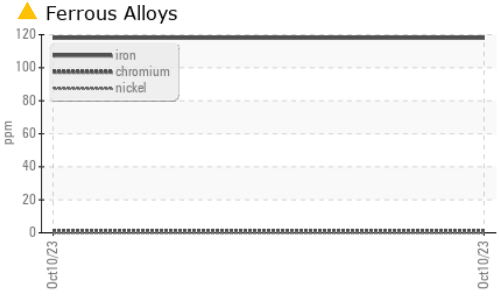










VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

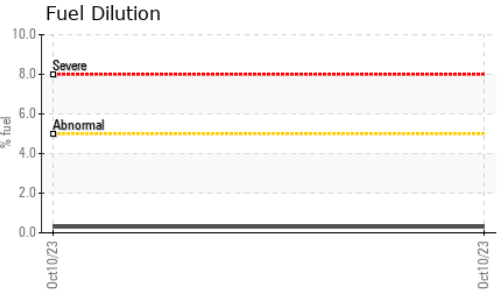

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.6	14.2	---

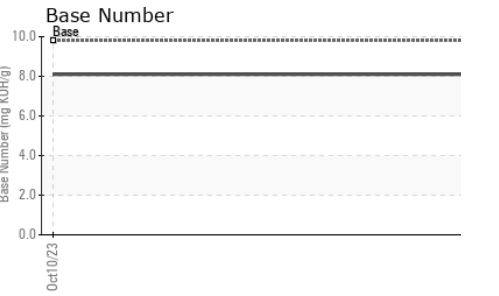

GRAPHS

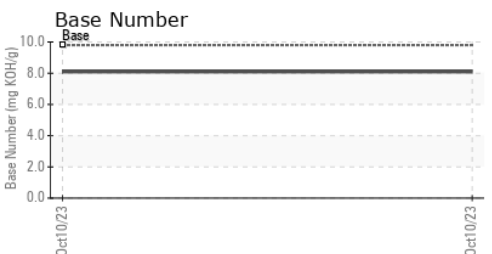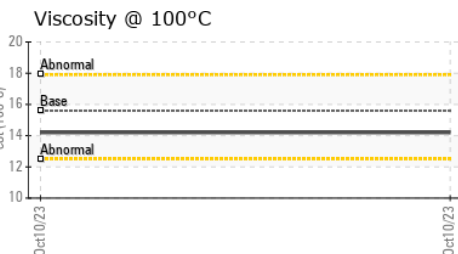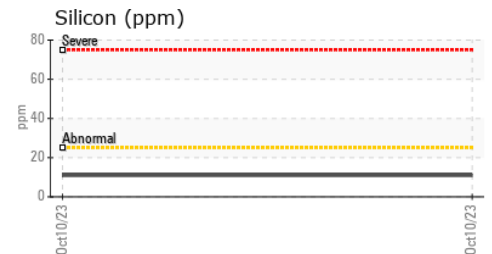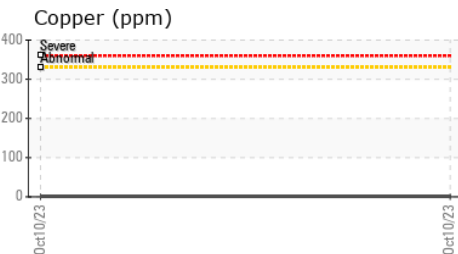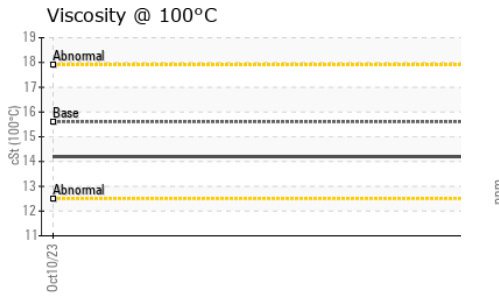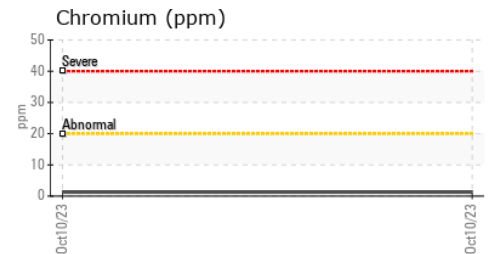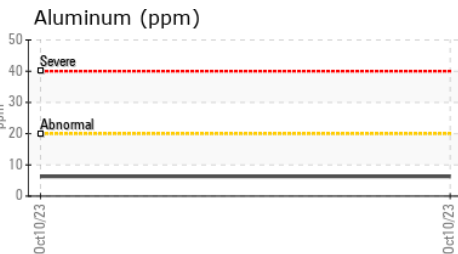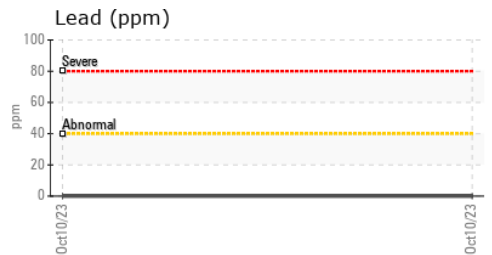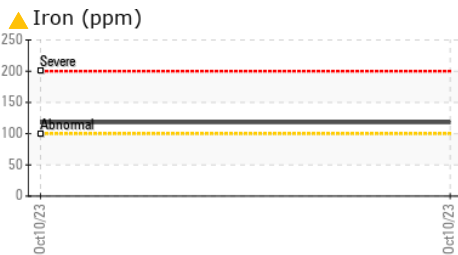

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0096372 **Received** : 08 Nov 2023
Lab Number : 06001439 **Diagnosed** : 09 Nov 2023
Unique Number : 10729799 **Diagnostician** : Jonathan Hester
Test Package : MOB 2 (Additional Tests: FuelDilution, PercentFuel)

TRINITAS FARMING
 45499 W PANOCHE RD
 FIREBAUGH, CA
 US 93622
 Contact: SPENCER COOPER
 spencer.cooper@trinitasfarming.com
 T: (209)493-2999
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)