

RECOMMENDATION

The oil change at the time of sampling has been noted. We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS								
Sample Status			ABNORMAL	ABNORMAL	ABNORMAL			
Particles >4µm	ASTM D7647	>1300	<u> </u>	▲ 55310	117948			
Particles >6µm	ASTM D7647	>320	🔺 11558	4 991	🔺 28198			
Particles >14µm	ASTM D7647	>80	<u> </u>	54	5 33			
Particles >21µm	ASTM D7647	>20	A 34	6	4 34			
Oil Cleanliness	ISO 4406 (c)	>17/15/13	<u> </u>	🔺 23/19/13	4 /22/16			

Customer Id: KRASPRMO Sample No.: PCA0101659 Lab Number: 06001549 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Angela Borella +1 800-237-1369 angela.borella@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u> ISO

RECOMMENDED ACTIONS					
Action	Status	Date	Done By	Description	
Change Filter			?	We recommend you service the filters on this component if applicable.	

HISTORICAL DIAGNOSIS



28 Jan 2023 Diag: Don Baldridge

The oil change at the time of sampling has been noted. We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



15 Jan 2022 Diag: Don Baldridge



The oil change at the time of sampling has been noted. We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



19 Jun 2021 Diag: Jonathan Hester

The oil change at the time of sampling has been noted. We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





view report



OIL ANALYSIS REPORT

Sample Rating Trend

ISO

Area **PROCESS CHEESE [98620100]** Machine Id **AUGER CART 2 WEST** Component

Gearbox Fluid

GEAR OIL ISO 220 (--- GAL)

DIAGNOSIS

Recommendation

The oil change at the time of sampling has been noted. We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		Nov2020	Junzozi		0ct2023	
SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0101659	PCA0081534	PCA0065317
Sample Date		Client Info		30 Oct 2023	28 Jan 2023	15 Jan 2022
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS	6	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	12	8	11
Chromium	ppm	ASTM D5185m	>15	<1	0	<1
Nickel	ppm	ASTM D5185m	>15	0	0	0
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>25	2	0	3
Lead	ppm	ASTM D5185m	>100	0	0	0
Copper	ppm	ASTM D5185m	>200	0	0	<1
Tin	ppm	ASTM D5185m	>25	0	0	0
Antimony	ppm	ASTM D5185m	>5			0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	50	0	0	<1
Barium	ppm	ASTM D5185m	15	0	0	0
Molybdenum	ppm	ASTM D5185m	15	0	0	0
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m	50	<1	<1	0
Calcium	ppm	ASTM D5185m	50	2	2	2
Phosphorus	ppm	ASTM D5185m	350	428	427	518
Zinc	ppm	ASTM D5185m	100	0	1	0
Sulfur	ppm	ASTM D5185m	12500	928	1124	538
CONTAMINANT	ſS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	8	6	12
Sodium	ppm	ASTM D5185m		0	0	0
Potassium	ppm	ASTM D5185m	>20	1	<1	0
FLUID CLEANL	INESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>1300	A 74014	▲ 55310	117948
Particles >6µm		ASTM D7647	>320	🔺 11558	4 991	A 28198
Particles >14µm		ASTM D7647	>80	<u> </u>	54	▲ 533
Particles >21µm		ASTM D7647	>20	<u> </u>	6	▲ 34
Particles >38µm		ASTM D7647	>4	2	1	1
Particles >71µm		ASTM D7647	>3	1	1	0
Oil Cleanliness		ISO 4406 (c)	>17/15/13	A 23/21/15	a 23/19/13	▲ 24/22/16
FLUID DEGRAD	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.85	0.56	0.57	0.80
× /	÷ •					



Acid Number Abnorma

OIL ANALYSIS REPORT

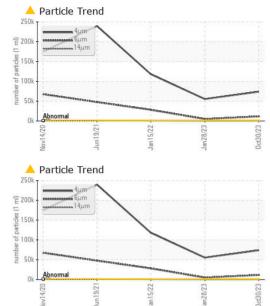

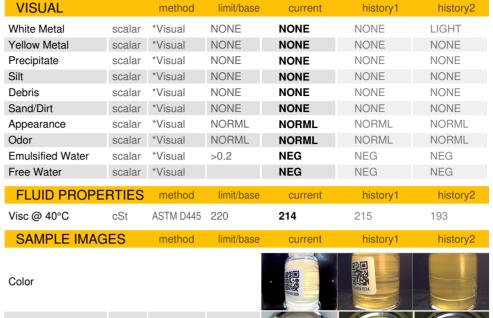

Bottom

