


COMPONENT CONDITION SUMMARY

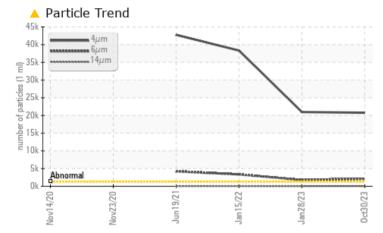

RECOMMENDATION

The oil change at the time of sampling has been noted. We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS						
Sample Status		ABNORMAL	ABNORMAL	ABNORMAL		
Particles >4µm	ASTM D7647 >130	0 🔺 20778	A 20969	▲ 38345		
Particles >6µm	ASTM D7647 >320	🔺 2116	1 772	3 346		
Oil Cleanliness	ISO 4406 (c) >17/1	5/13 🔺 22/18/13	A 22/18/12	<u> </u>		


Customer Id: KRASPRMO Sample No.: PCA0101662 Lab Number: 06001554 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Angela Borella +1 800-237-1369 angela.borella@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

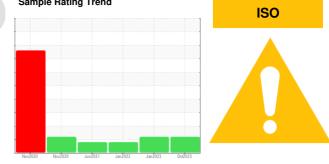

RECOMMENDED ACTIONS						
Action	Status	Date	Done By	Description		
Change Filter			?	We recommend you service the filters on this component if applicable.		

HISTORICAL DIAGNOSIS



28 Jan 2023 Diag: Don Baldridge

The oil change at the time of sampling has been noted. We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



view report

15 Jan 2022 Diag: Don Baldridge



The oil change at the time of sampling has been noted. We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



19 Jun 2021 Diag: Jonathan Hester

The oil change at the time of sampling has been noted. We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





OIL ANALYSIS REPORT

Area **PROCESS CHEESE [98620100]** Machine Id **AUGER CART 1 EAST** Component

Gearbox Fluid

GEAR OIL ISO 220 (--- GAL)

DIAGNOSIS

Recommendation

The oil change at the time of sampling has been noted. We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

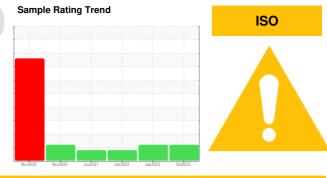



SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0101662	PCA0081531	PCA0065315
Sample Date		Client Info		30 Oct 2023	28 Jan 2023	15 Jan 2022
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	6	6	3
Chromium	ppm	ASTM D5185m	>15	<1	0	0
Nickel	ppm	ASTM D5185m	>15	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>25	2	0	2
Lead	ppm	ASTM D5185m	>100	0	0	0
Copper	ppm	ASTM D5185m	>200	<1	<1	<1
Tin	ppm	ASTM D5185m	>25	0	0	0
Antimony	ppm	ASTM D5185m	>5			<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	50	0	0	<1
Barium	ppm	ASTM D5185m	15	0	0	0
Molybdenum	ppm	ASTM D5185m	15	0	0	0
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m	50	<1	<1	0
Calcium	ppm	ASTM D5185m	50	<1	2	0
Phosphorus	ppm	ASTM D5185m	350	321	314	337
Zinc	ppm	ASTM D5185m	100	0	8	0
Sulfur	ppm	ASTM D5185m	12500	496	464	161
CONTAMINAN	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	13	15	13
Sodium	ppm	ASTM D5185m		0	0	0
Potassium	ppm	ASTM D5185m	>20	1	<1	0
FLUID CLEANL	INESS.	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>1300	A 20778	2 0969	▲ 38345
Particles >6µm		ASTM D7647	>320	<u> </u>	<u> </u>	▲ 3346
Particles >14µm		ASTM D7647	>80	41	25	40
Particles >21µm		ASTM D7647	>20	8	3	6
Particles >38µm		ASTM D7647	>4	1	1	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>17/15/13	A 22/18/13	<u>22/18/12</u>	2 2/19/12
FLUID DEGRAD	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.85	0.71	0.73	0.83




OIL ANALYSIS REPORT

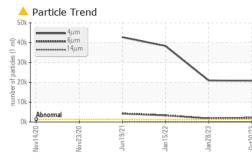




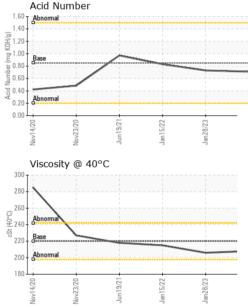

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPE	RTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	220	208	206	215
SAMPLE IMAG	ES	method	limit/base	current	history1	history2
Color						



Bottom

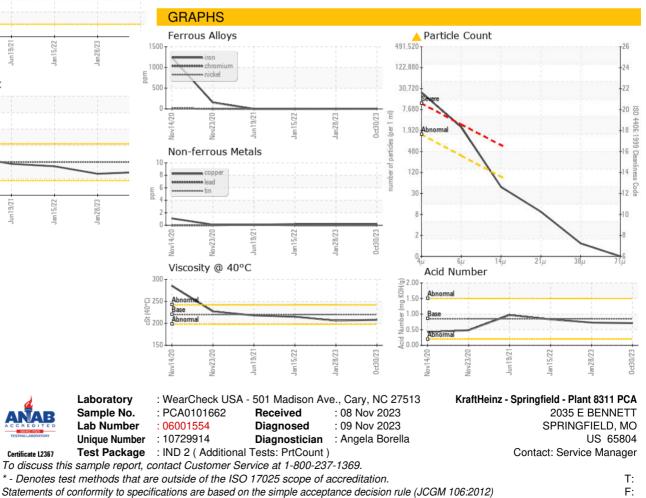



Contact/Location: Service Manager - KRASPRMO