

FLEET


# **PROBLEM SUMMARY**

Sample Rating Trend

### 2227068 (S/N 4v4nc9eh2rn631479) Component Transmission

Fluid NOT GIVEN (--- GAL)

## COMPONENT CONDITION SUMMARY

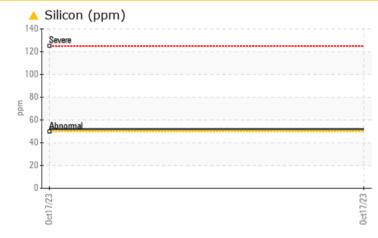

### RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

PROBLEMATIC TEST RESULTS									
Sample Status				ABNORMAL					
Silicon	ppm	ASTM D5185m	>50	<u> </u>					

#### Customer Id: PERDILSC Sample No.: PCA0108097 Lab Number: 06001945 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data: Jonathan Hester +1 919-379-4092 x4092 jhester@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS						
Action	Status	Date	Done By	Description		
Information Required			?	Please specify the brand, type, and viscosity of the oil on your next sample.		

# HISTORICAL DIAGNOSIS



# **OIL ANALYSIS REPORT**

Sample Rating Trend

#### Area **FLEET** Machine Id **2227068 (S/N 4v4nc9eh2rn631479)** Component

Transmission Fluid NOT GIVEN (--- GAL)

### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

#### Wear

All component wear rates are normal.

#### Contamination

Elemental level of silicon (Si) above normal indicating ingress of seal material.

#### Fluid Condition


The condition of the fluid is acceptable for the time in service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0108097		
Sample Date		Client Info		17 Oct 2023		
Machine Age	hrs	Client Info		0		
Dil Age	hrs	Client Info		0		
Dil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS	6	method	limit/base	current	history1	history2
ron	ppm	ASTM D5185m	>200	48		
Chromium	ppm	ASTM D5185m	>10	<1		
Nickel	ppm	ASTM D5185m		<1		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>50	<1		
_ead	ppm	ASTM D5185m	>50	0		
Copper	ppm	ASTM D5185m	>200	28		
Tin	ppm	ASTM D5185m	>10	0		
/anadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
		ASTM D5185m		0		
Molybdenum	ppm			-		
Manganese	ppm	ASTM D5185m		36		
Magnesium	ppm	ASTM D5185m		2		
	ppm	ASTM D5185m		814		
Phosphorus	ppm	ASTM D5185m		666		
Zinc	ppm	ASTM D5185m		20		
Sulfur	ppm	ASTM D5185m		4390		
CONTAMINAN	ΓS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	<mark>/</mark> 52		
Sodium	ppm	ASTM D5185m		2		
Potassium	ppm	ASTM D5185m	>20	<1		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	NONE		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>0.1	NEG		
Free Water	scalar	*Visual		NEG		
FLUID PROPER	RTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		103		
$IISC(0) \Delta U^{st}$						

DIRT



# **OIL ANALYSIS REPORT**

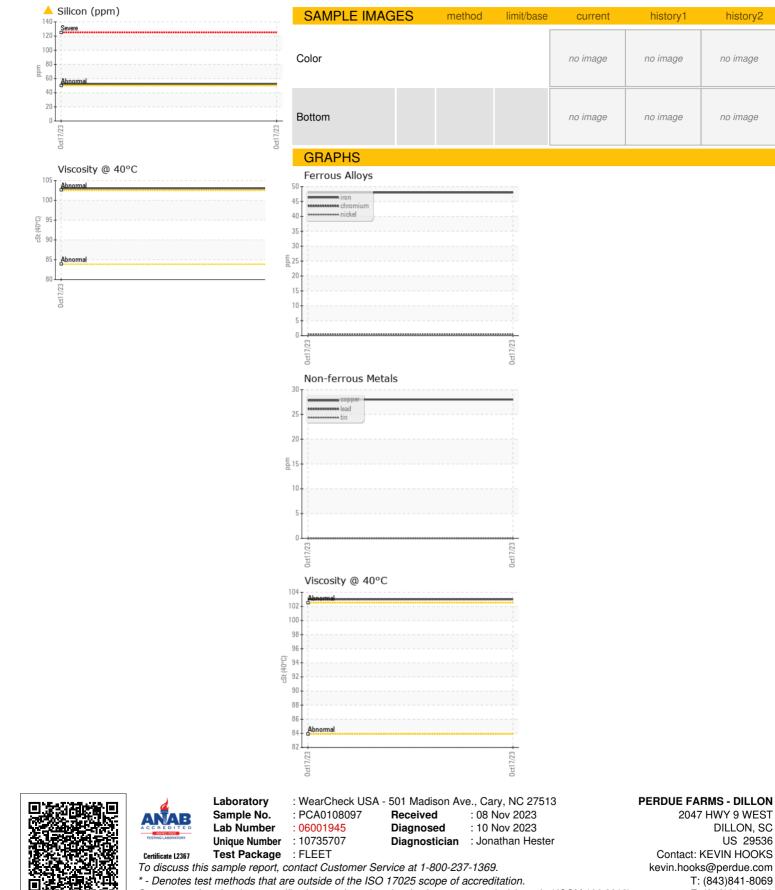

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Submitted By: KEVIN HOOKS

Page 4 of 4

DILLON, SC

T: (843)841-8069

F: (843)841-8070

US 29536

history2

no image

no image