


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

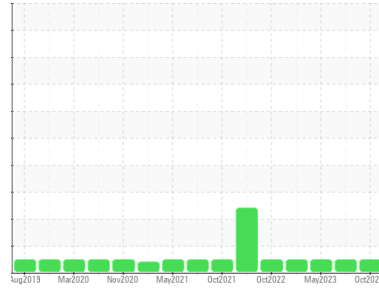

Machine Id  
**PETERBILT 101**

Component  
**Diesel Engine**

Fluid  
**CONOCO PHILLIPS GUARDOL ECT 15W40 (--- Oz)**

### DIAGNOSIS

#### Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0028072</b>	PCA0083491	PCA0083475
Sample Date	Client Info		<b>20 Oct 2023</b>	19 Jul 2023	02 May 2023
Machine Age	mls	Client Info	<b>479254</b>	460779	16581
Oil Age	mls	Client Info	<b>0</b>	460779	16581
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >110	<b>44</b>	37	37
Chromium	ppm	ASTM D5185m >4	<b>&lt;1</b>	1	1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m	<b>16</b>	<1	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>2</b>	2	3
Lead	ppm	ASTM D5185m >45	<b>5</b>	4	3
Copper	ppm	ASTM D5185m >85	<b>2</b>	1	<1
Tin	ppm	ASTM D5185m >4	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 85	<b>26</b>	5	2
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>55</b>	64	66
Manganese	ppm	ASTM D5185m	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m 350	<b>924</b>	993	1118
Calcium	ppm	ASTM D5185m 1800	<b>1245</b>	1114	1229
Phosphorus	ppm	ASTM D5185m 1000	<b>962</b>	1045	1108
Zinc	ppm	ASTM D5185m 1100	<b>1302</b>	1284	1391
Sulfur	ppm	ASTM D5185m 3500	<b>2938</b>	3036	3480

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	<b>6</b>	4	4
Sodium	ppm	ASTM D5185m	<b>3</b>	3	2
Potassium	ppm	ASTM D5185m >20	<b>4</b>	2	6



### INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.6</b>	0.5	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.3</b>	10.1	8.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>23.0</b>	21.4	19.5

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>19.4</b>	18.3	16.9
Base Number (BN)	mg KOH/g	ASTM D2896 9.5	<b>6.9</b>	7.4	7.2









# OIL ANALYSIS REPORT

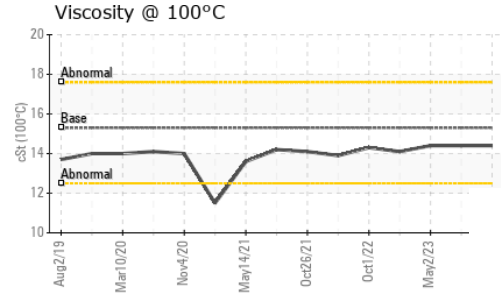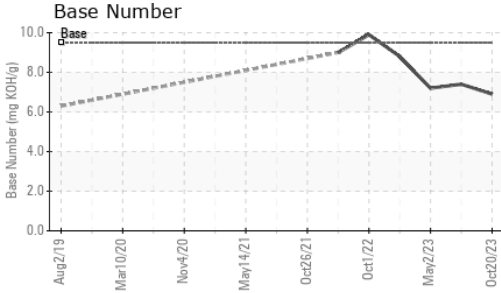

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.3	<b>14.4</b>	14.4	14.4

## GRAPHS

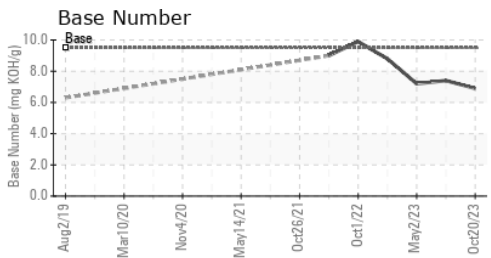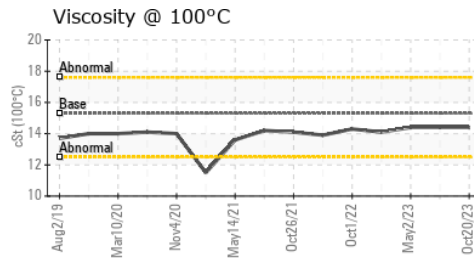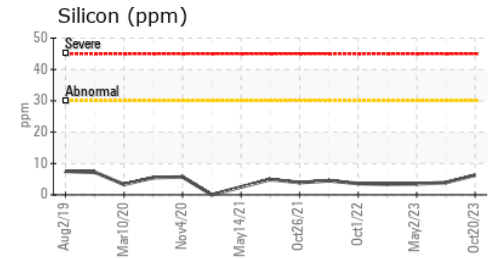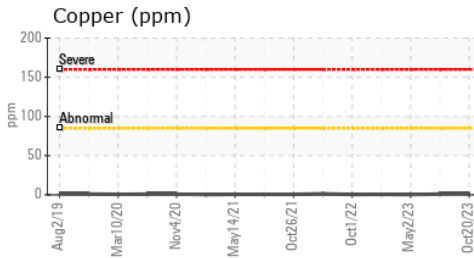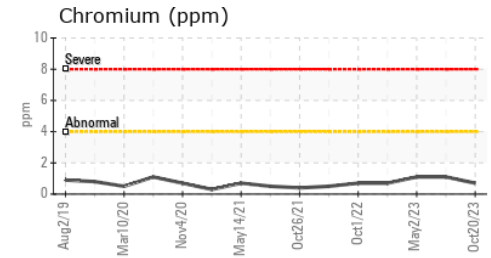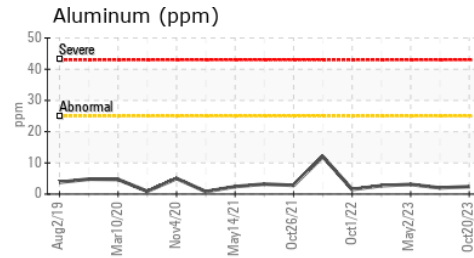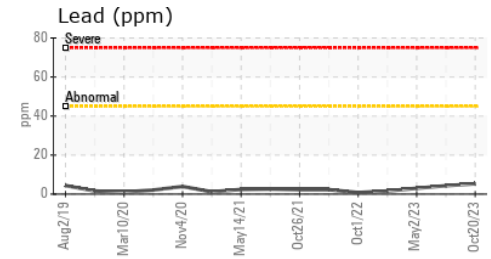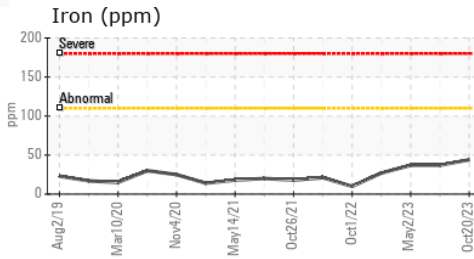

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0028072 **Received** : 08 Nov 2023  
**Lab Number** : 06002090 **Diagnosed** : 10 Nov 2023  
**Unique Number** : 10735852 **Diagnostician** : Angela Borella  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**ALBERT HOGOBOOM OILFIELD TRUCKING INC**  
 767 OIL HILL ROAD  
 EL DORADO, KS  
 US 67042  
 Contact: LOREN JACK  
 loren@hogoboom.net  
 T:  
 F: (316)321-1396

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)