


OIL ANALYSIS REPORT



Area
KEMP QUARRIES / RIVER VALLEY ARKOMA
Machine Id
WL062
Component
Rear Right Final Drive
Fluid
MOBIL MOBILTRANS HD 50 (--- GAL)

Sample Rating Trend

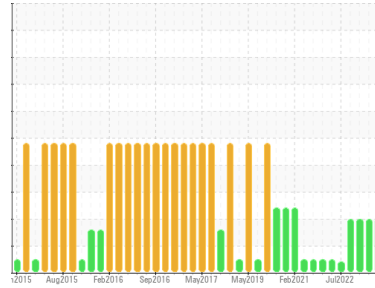

VISCOSITY



DIAGNOSIS

▲ Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

▲ Fluid Condition

The oil viscosity is lower than normal. Additive levels indicate the addition of a different brand, or type of oil. Confirm oil type.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0084028	PCA0084235	PCA0070337
Sample Date	Client Info	23 Oct 2023	04 Aug 2023	21 Apr 2023
Machine Age	hrs	25859	25405	24885
Oil Age	hrs	24267	1500	48315
Oil Changed	Client Info	Not Chngd	Not Chngd	Not Chngd
Sample Status		ATTENTION	ATTENTION	ATTENTION

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >800	144	159	149
Chromium	ppm	ASTM D5185m >10	2	2	3
Nickel	ppm	ASTM D5185m >5	<1	0	<1
Titanium	ppm	ASTM D5185m >15	<1	0	<1
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >75	3	4	<1
Lead	ppm	ASTM D5185m >10	4	3	3
Copper	ppm	ASTM D5185m >75	40	31	25
Tin	ppm	ASTM D5185m >8	2	2	2
Vanadium	ppm	ASTM D5185m	0	<1	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	0	0	0
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	0	2	2
Manganese	ppm	ASTM D5185m	1	1	1
Magnesium	ppm	ASTM D5185m	21	25	28
Calcium	ppm	ASTM D5185m	▲ 407	▲ 599	▲ 628
Phosphorus	ppm	ASTM D5185m	▲ 470	▲ 509	▲ 465
Zinc	ppm	ASTM D5185m	▲ 568	▲ 595	▲ 626
Sulfur	ppm	ASTM D5185m	▲ 1946	▲ 2647	▲ 2283

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >400	18	28	26
Sodium	ppm	ASTM D5185m	1	2	2
Potassium	ppm	ASTM D5185m >20	1	<1	1

VISUAL


method	limit/base	current	history1	history2	
White Metal	scalar	*Visual NONE	NONE	NONE	MODER
Yellow Metal	scalar	*Visual NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual NONE	NONE	NONE	NONE
Silt	scalar	*Visual NONE	NONE	NONE	NONE
Debris	scalar	*Visual NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	NONE	NONE	NONE
Appearance	scalar	*Visual NORML	NORML	NORML	NORML
Odor	scalar	*Visual NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual >0.2	NEG	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG

FLUID PROPERTIES


method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445 195	▲ 73.6	▲ 75.8	▲ 78.2

OIL ANALYSIS REPORT

▲ Viscosity @ 40°C

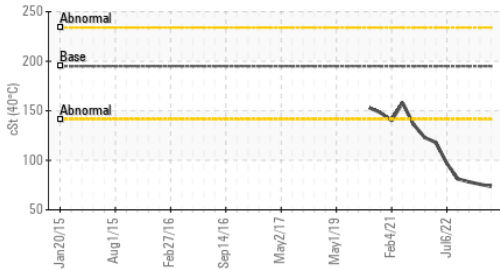


▲ Additives

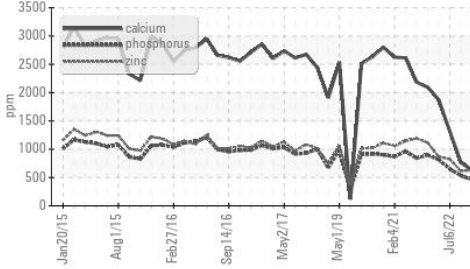


SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

GRAPHS


Iron (ppm)

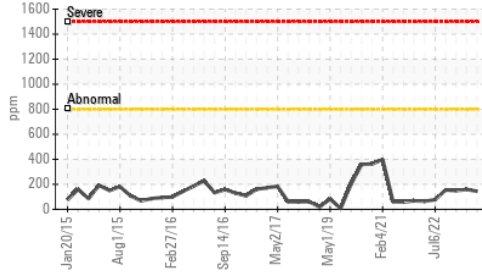


Lead (ppm)

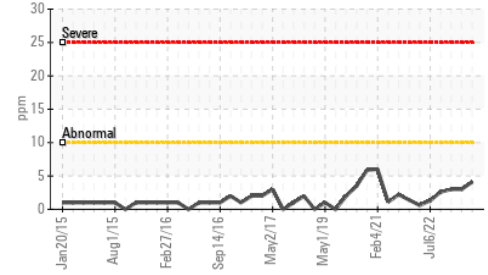


Aluminum (ppm)

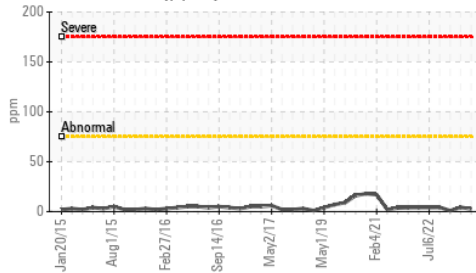


Chromium (ppm)

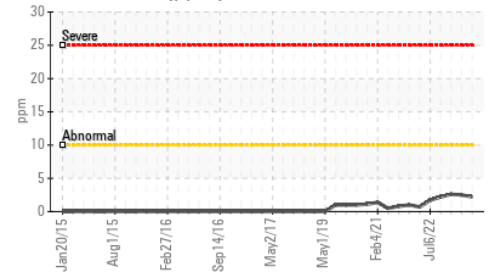


Copper (ppm)

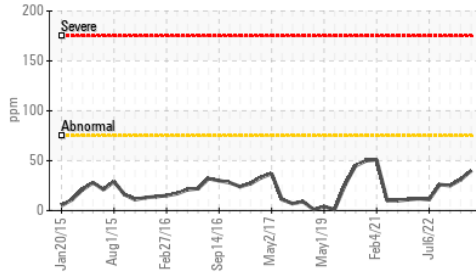


Silicon (ppm)

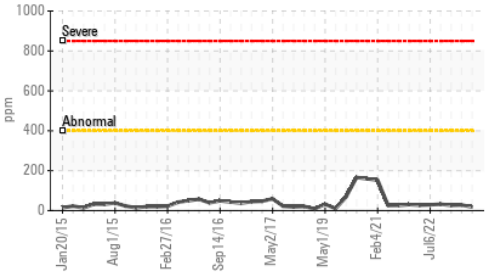

▲ Viscosity @ 40°C

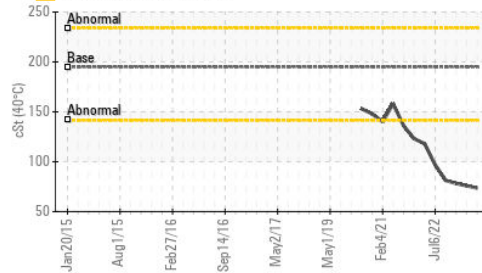

▲ Additives

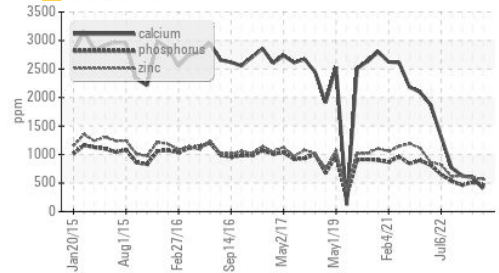

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0084028 **Received** : 08 Nov 2023
Lab Number : 06002510 **Diagnosed** : 10 Nov 2023
Unique Number : 10736272 **Diagnostician** : Sean Felton
Test Package : MOB 1

Kemp Quarries - River Valley - Arkoma
 12971 HWY 9a
 Shawnee, OK
 US 74804
 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

arkomashop@kempquarries.net

T:

F: