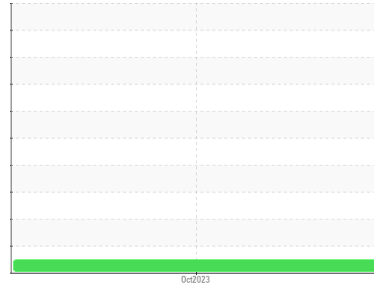


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**


Area  
**Walgreens - Tractor**  
 Machine for  
**[Walgreens - Tractor] 136A63365**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**


**DIAGNOSIS**
**Recommendation**

Resample at the next service interval to monitor.

**Wear**

Metal levels are typical for a new component breaking in.

**Contamination**

There is no indication of any contamination in the oil.

**Fluid Condition**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

**SAMPLE INFORMATION**

|               | method      | limit/base  | current            | history1 | history2 |
|---------------|-------------|-------------|--------------------|----------|----------|
| Sample Number | Client Info |             | <b>PCA0105417</b>  | ---      | ---      |
| Sample Date   | Client Info |             | <b>25 Oct 2023</b> | ---      | ---      |
| Machine Age   | mls         | Client Info | <b>49705</b>       | ---      | ---      |
| Oil Age       | mls         | Client Info | <b>24705</b>       | ---      | ---      |
| Oil Changed   | Client Info |             | <b>Not Chngd</b>   | ---      | ---      |
| Sample Status |             |             | <b>NORMAL</b>      | ---      | ---      |

**CONTAMINATION**

|        | method    | limit/base | current        | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel   | WC Method | >2.0       | <b>&lt;1.0</b> | ---      | ---      |
| Glycol | WC Method |            | <b>NEG</b>     | ---      | ---      |

**WEAR METALS**

|          | method | limit/base       | current      | history1 | history2 |
|----------|--------|------------------|--------------|----------|----------|
| Iron     | ppm    | ASTM D5185m >100 | <b>18</b>    | ---      | ---      |
| Chromium | ppm    | ASTM D5185m >20  | <b>2</b>     | ---      | ---      |
| Nickel   | ppm    | ASTM D5185m >4   | <b>5</b>     | ---      | ---      |
| Titanium | ppm    | ASTM D5185m      | <b>&lt;1</b> | ---      | ---      |
| Silver   | ppm    | ASTM D5185m >3   | <b>&lt;1</b> | ---      | ---      |
| Aluminum | ppm    | ASTM D5185m >20  | <b>14</b>    | ---      | ---      |
| Lead     | ppm    | ASTM D5185m >40  | <b>3</b>     | ---      | ---      |
| Copper   | ppm    | ASTM D5185m >330 | <b>13</b>    | ---      | ---      |
| Tin      | ppm    | ASTM D5185m >15  | <b>1</b>     | ---      | ---      |
| Vanadium | ppm    | ASTM D5185m      | <b>&lt;1</b> | ---      | ---      |
| Cadmium  | ppm    | ASTM D5185m      | <b>0</b>     | ---      | ---      |

**ADDITIVES**

|            | method | limit/base       | current     | history1 | history2 |
|------------|--------|------------------|-------------|----------|----------|
| Boron      | ppm    | ASTM D5185m 2    | <b>18</b>   | ---      | ---      |
| Barium     | ppm    | ASTM D5185m 0    | <b>0</b>    | ---      | ---      |
| Molybdenum | ppm    | ASTM D5185m 50   | <b>60</b>   | ---      | ---      |
| Manganese  | ppm    | ASTM D5185m 0    | <b>1</b>    | ---      | ---      |
| Magnesium  | ppm    | ASTM D5185m 950  | <b>802</b>  | ---      | ---      |
| Calcium    | ppm    | ASTM D5185m 1050 | <b>1230</b> | ---      | ---      |
| Phosphorus | ppm    | ASTM D5185m 995  | <b>973</b>  | ---      | ---      |
| Zinc       | ppm    | ASTM D5185m 1180 | <b>1294</b> | ---      | ---      |
| Sulfur     | ppm    | ASTM D5185m 2600 | <b>3095</b> | ---      | ---      |

**CONTAMINANTS**

|           | method | limit/base      | current   | history1 | history2 |
|-----------|--------|-----------------|-----------|----------|----------|
| Silicon   | ppm    | ASTM D5185m >25 | <b>13</b> | ---      | ---      |
| Sodium    | ppm    | ASTM D5185m     | <b>0</b>  | ---      | ---      |
| Potassium | ppm    | ASTM D5185m >20 | <b>37</b> | ---      | ---      |



**INFRA-RED**

|           | method   | limit/base      | current     | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot %    | %        | *ASTM D7844 >3  | <b>0.2</b>  | ---      | ---      |
| Nitration | Abs/cm   | *ASTM D7624 >20 | <b>7.3</b>  | ---      | ---      |
| Sulfation | Abs/.1mm | *ASTM D7415 >30 | <b>19.8</b> | ---      | ---      |

**FLUID DEGRADATION**

|                  | method   | limit/base      | current     | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Oxidation        | Abs/.1mm | *ASTM D7414 >25 | <b>15.9</b> | ---      | ---      |
| Base Number (BN) | mg KOH/g | ASTM D2896      | <b>8.1</b>  | ---      | ---      |





# OIL ANALYSIS REPORT

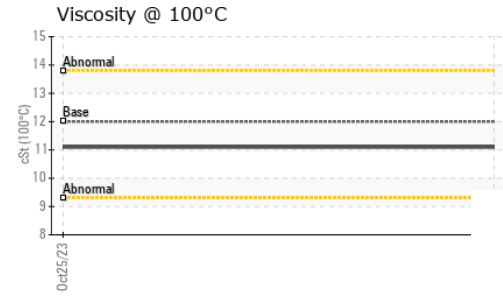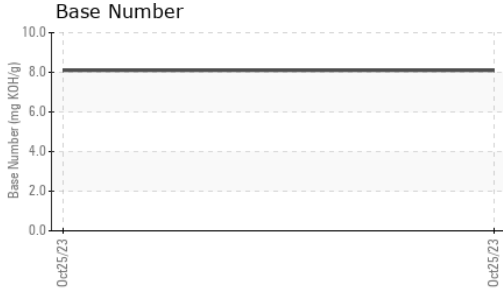

| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | ---      |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | ---      |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | ---      |
| Silt             | scalar | *Visual    | NONE    | NONE     | ---      |
| Debris           | scalar | *Visual    | NONE    | NONE     | ---      |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | ---      |
| Appearance       | scalar | *Visual    | NORML   | NORML    | ---      |
| Odor             | scalar | *Visual    | NORML   | NORML    | ---      |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | ---      |
| Free Water       | scalar | *Visual    |         | NEG      | ---      |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C     | cSt    | ASTM D445  | 12.00   | 11.1     | ---      |

## GRAPHS

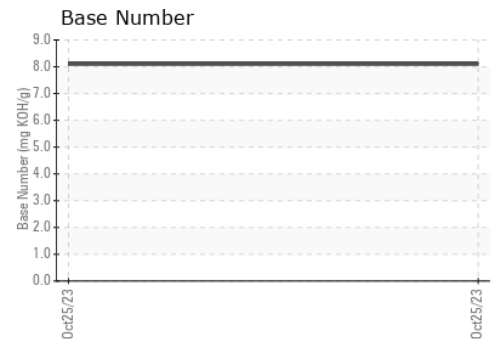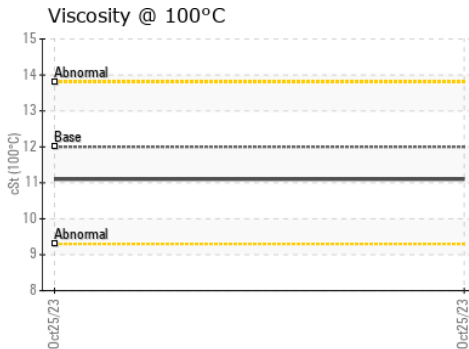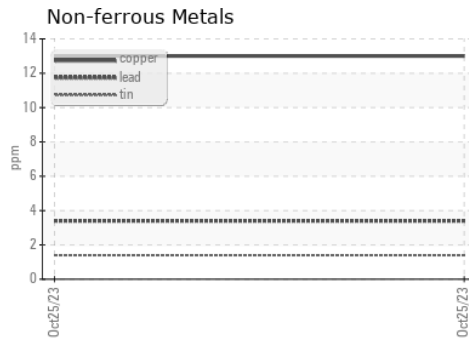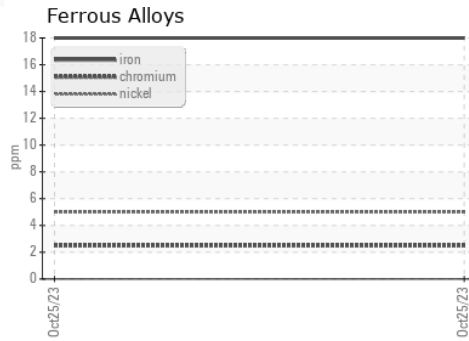

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0105417 **Received** : 09 Nov 2023  
**Lab Number** : **06002651** **Diagnosed** : 09 Nov 2023  
**Unique Number** : 10736413 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**Transervice - Shop 1366 - Berkeley-Woodland**  
 2370 East Main Street  
 Woodland, CA  
 US 95776  
 Contact: Gary Mann  
 gmanna@transervice.com  
 T: (530)666-7771  
 F: (530)406-7971

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)