


OIL ANALYSIS REPORT

Sample Rating Trend

Acid Number (AN) mg KOH/g ASTM D8045 1.6







Inactive Off Road Machine Id E00

Component

Hydraulic System

PETRO CANADA DURATRAN (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

RATRAN (GAL	.)	Oct2009	Apr2010 Jul2010	Aug2011 Mar2012 Au	1g2023	
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0109812	PCA0098472	PCA0083256
Sample Date		Client Info		07 Nov 2023	07 Aug 2023	24 May 2023
Machine Age	hrs	Client Info		32373	32373	32373
Oil Age	hrs	Client Info		32373	32373	32373
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METAL	.S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	35	30	32
Chromium	ppm	ASTM D5185m	>10	2	2	1
Nickel	ppm	ASTM D5185m	>10	0	<1	0
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>10	3	1	3
Lead	ppm	ASTM D5185m	>10	<1	3	2
Copper	ppm	ASTM D5185m	>75	14	15	12
Tin	ppm	ASTM D5185m	>10	0	<1	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	110	6	0	8
Barium	ppm	ASTM D5185m	0.0	0	0	0
Molybdenum	ppm	ASTM D5185m	0.0	2	3	3
Manganese	ppm	ASTM D5185m	1	0	2	1
Magnesium	ppm	ASTM D5185m	13	15	11	24
Calcium	ppm	ASTM D5185m	3610	343	257	350
Phosphorus	ppm	ASTM D5185m	1192	552	500	559
Zinc	ppm	ASTM D5185m	1455	784	657	774
Sulfur	ppm	ASTM D5185m	2641	1956	1859	1891
CONTAMINAN	ITS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	4	4	4
Sodium	ppm	ASTM D5185m		0	7	3
Potassium	ppm	ASTM D5185m	>20	3	4	2
FLUID CLEAN	LINESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	1349	794	1676
Particles >6µm		ASTM D7647	>1300	227	69	207
Particles >14μm		ASTM D7647	>160	17	4	19
Particles >21µm		ASTM D7647	>40	6	0	5
Particles >38µm		ASTM D7647	>10	0	0	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	18/15/11	17/13/9	18/15/11
FLUID DEGRAI	OITAC	method	limit/base	current	history1	history2


0.68

0.67

0.60



OIL ANALYSIS REPORT

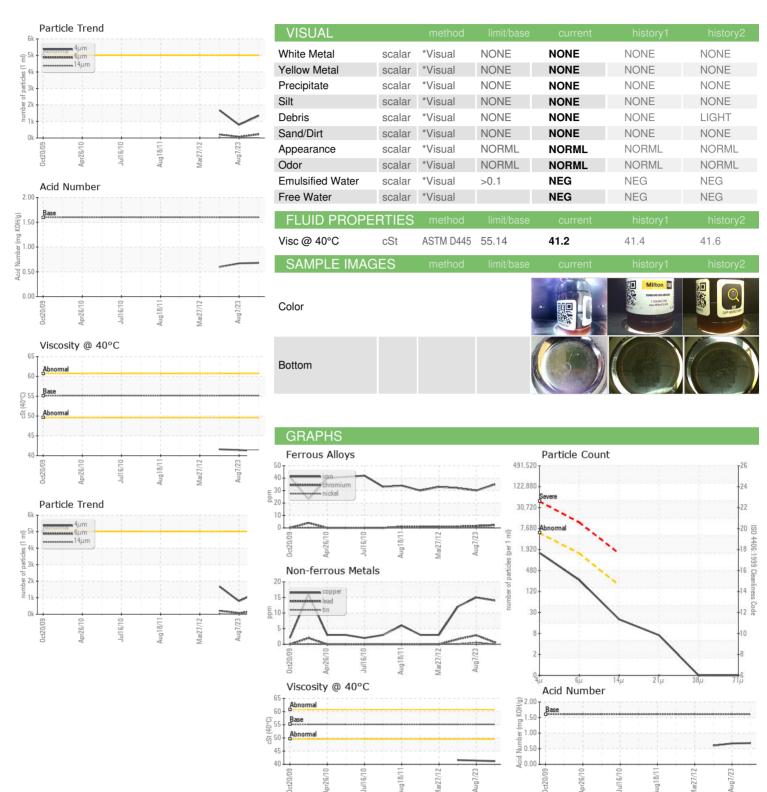





Certificate L2367

Laboratory Sample No. Lab Number

Unique Number Test Package

: 06002853

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : PCA0109812 : 10736615

Diagnosed Diagnostician

Received : 09 Nov 2023 : 13 Nov 2023 : Don Baldridge

: MOB 2 To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

G LOPES CONSTRUCTION

565 WINTHROP ST TAUNTON, MA US 02780

Contact: BUTCH MCGRATH

Submitted By: MATT MANOLI

bmcgrath@glopes.com

T: F: