


# OIL ANALYSIS REPORT



Area  
**G.LOPES CONSTRUCTION INC./Off-Road**  
 Machine Id  
**E27**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

Sample Rating Trend

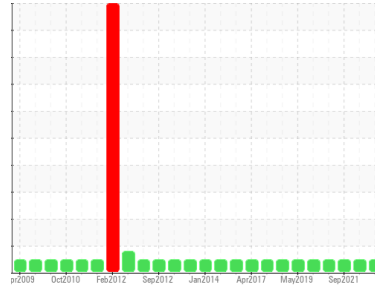

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0109810</b>	PCA0072298	WC0594501
Sample Date	Client Info		<b>07 Nov 2023</b>	20 May 2022	14 Sep 2021
Machine Age	hrs	Client Info	<b>12823</b>	12297	12038
Oil Age	hrs	Client Info	<b>12530</b>	12263	34
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>16</b>	9	2
Chromium	ppm	ASTM D5185m >20	<b>0</b>	<1	0
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >25	<b>2</b>	1	0
Lead	ppm	ASTM D5185m >40	<b>0</b>	1	0
Copper	ppm	ASTM D5185m >330	<b>&lt;1</b>	<1	0
Tin	ppm	ASTM D5185m >15	<b>1</b>	1	0
Antimony	ppm	ASTM D5185m	<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>6</b>	15	15
Barium	ppm	ASTM D5185m 0	<b>2</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>59</b>	59	62
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m 1010	<b>894</b>	995	902
Calcium	ppm	ASTM D5185m 1070	<b>971</b>	1151	1093
Phosphorus	ppm	ASTM D5185m 1150	<b>1014</b>	1021	973
Zinc	ppm	ASTM D5185m 1270	<b>1225</b>	1224	1147
Sulfur	ppm	ASTM D5185m 2060	<b>2800</b>	2758	2478

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>3</b>	2	1
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	0



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.7</b>	0.3	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.7</b>	6.0	5
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.5</b>	17.4	17.6

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.2</b>	13.0	13.2
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>10.69</b>	10.4	9.86









# OIL ANALYSIS REPORT

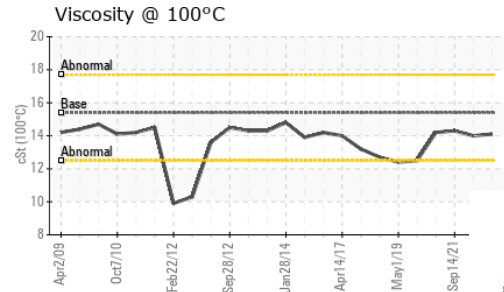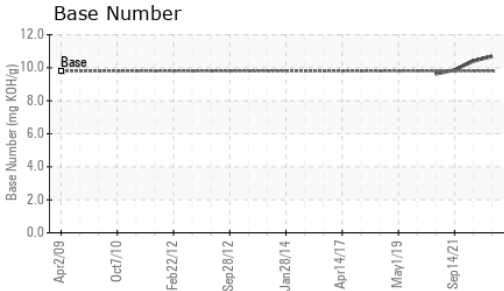

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.1</b>	14.0	14.3

## GRAPHS

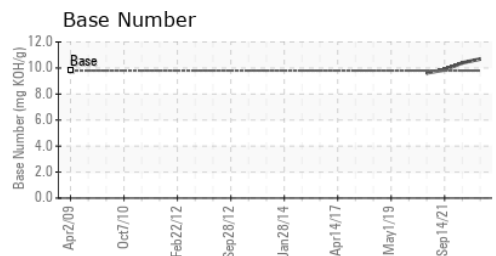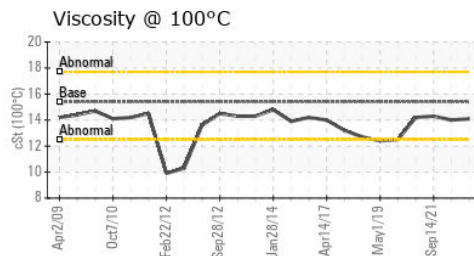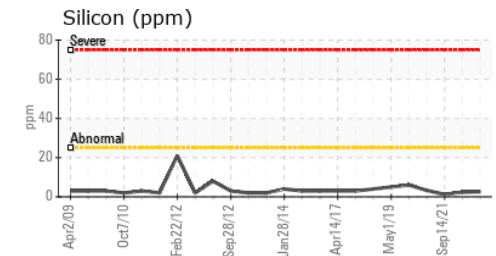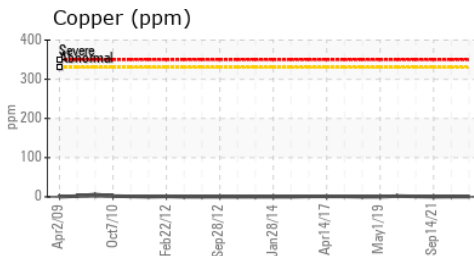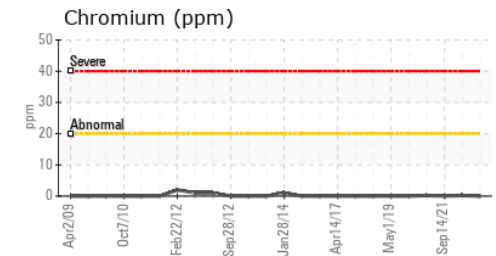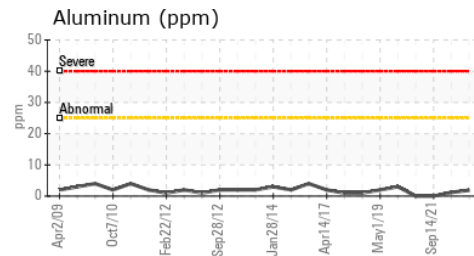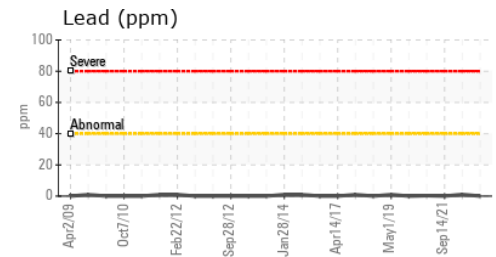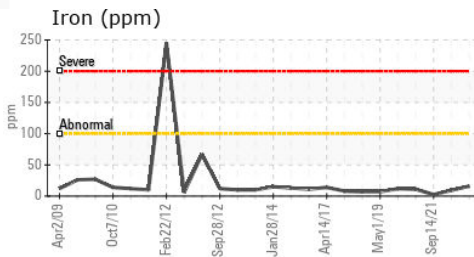

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0109810 **Received** : 09 Nov 2023  
**Lab Number** : 06003070 **Diagnosed** : 14 Nov 2023  
**Unique Number** : 10736832 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2

**G LOPES CONSTRUCTION**  
 565 WINTHROP ST  
 TAUNTON, MA  
 US 02780  
 Contact: BUTCH MCGRATH  
 bmcgrath@glopes.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: