




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

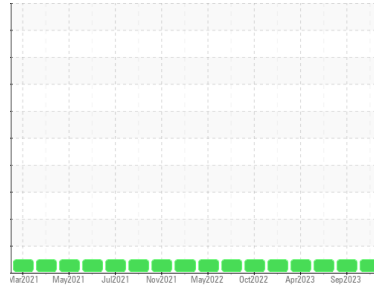

Machine Id
410006

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0068103	GFL0068137	GFL0068133
Sample Date	Client Info	02 Nov 2023	25 Sep 2023	17 Jul 2023
Machine Age	hrs	8466	8032	7335
Oil Age	hrs	600	600	600
Oil Changed	Client Info	Changed	Changed	Changed
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	<1.0

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >100	4	10	13
Chromium	ppm	ASTM D5185m >20	<1	1	1
Nickel	ppm	ASTM D5185m >4	0	<1	0
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >20	1	7	4
Lead	ppm	ASTM D5185m >40	<1	0	0
Copper	ppm	ASTM D5185m >330	0	<1	<1
Tin	ppm	ASTM D5185m >15	0	<1	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 0	5	4	6
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 60	61	66	61
Manganese	ppm	ASTM D5185m 0	<1	<1	<1
Magnesium	ppm	ASTM D5185m 1010	929	1057	936
Calcium	ppm	ASTM D5185m 1070	1050	1200	1157
Phosphorus	ppm	ASTM D5185m 1150	995	1192	1018
Zinc	ppm	ASTM D5185m 1270	1208	1507	1284
Sulfur	ppm	ASTM D5185m 2060	3033	3701	3746

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	2	3	3
Sodium	ppm	ASTM D5185m	51	20	3
Potassium	ppm	ASTM D5185m >20	47	30	6
Glycol	%	*ASTM D2982	NEG	NEG	NEG

INFRA-RED




method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >3	0.7	1	1.1
Nitration	Abs/cm	*ASTM D7624 >20	7.3	9.0	8.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	19.1	19.5	19.5

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	13.9	14.5	14.5
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	9.1	7.9	8.5







OIL ANALYSIS REPORT

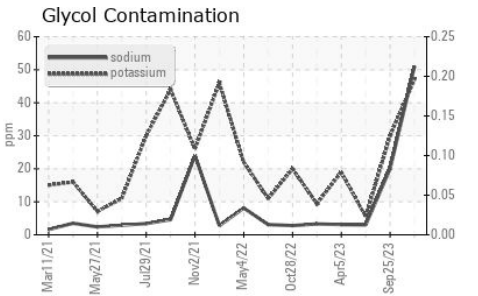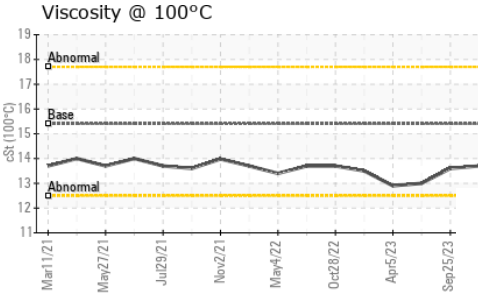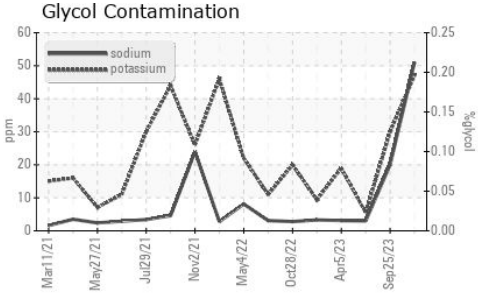

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	13.7	13.6	13.0

GRAPHS

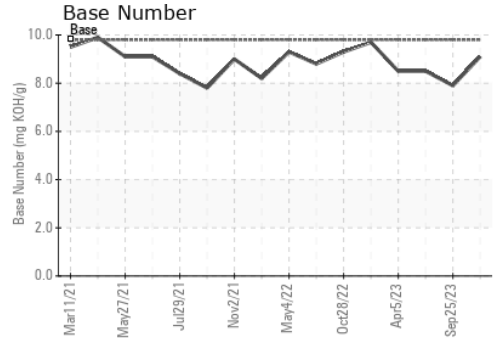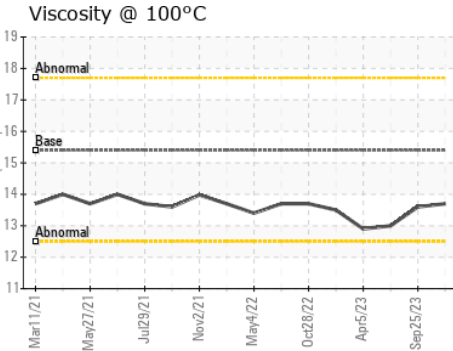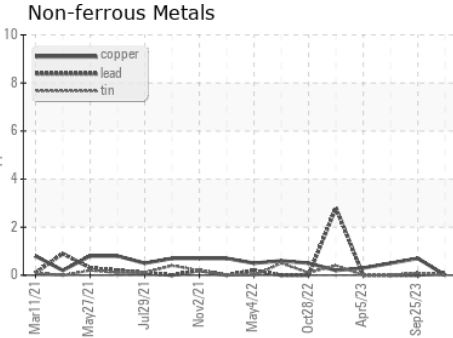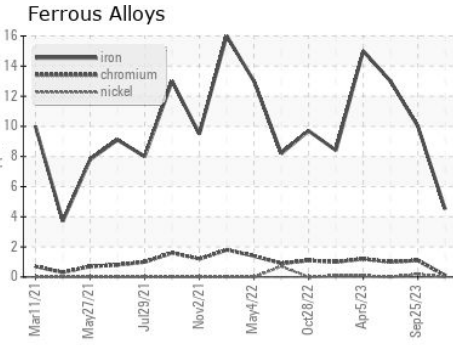

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0068103 **Received** : 09 Nov 2023
Lab Number : 06003349 **Diagnosed** : 13 Nov 2023
Unique Number : 10737111 **Diagnostician** : Angela Borella
Test Package : FLEET (Additional Tests: Glycol)

GFL Environmental - 028 - Weldon
 2211 US Highway 301
 Halifax, NC
 US 27839
 Contact: TRAVIS PORCH
 tporch@gflenv.com
 T: (252)532-3344
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)