




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

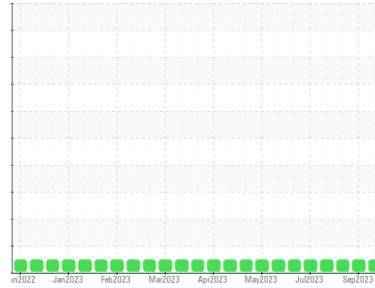

Area  
**166**  
 Machine Id  
**420052-482**

Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>GFL0091241</b>	GFL0087883	GFL0091212
Sample Date	Client Info			<b>02 Nov 2023</b>	11 Sep 2023	17 Aug 2023
Machine Age	mls	Client Info		<b>126729</b>	7047	6951
Oil Age	mls	Client Info		<b>0</b>	2400	1200
Oil Changed	Client Info			<b>Not Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method		>6.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>4</b>	2	8
Chromium	ppm	ASTM D5185m	>20	<b>0</b>	<1	0
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	2	3
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m	>330	<b>1</b>	<1	2
Tin	ppm	ASTM D5185m	>15	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<b>&lt;1</b>	2	0
Barium	ppm	ASTM D5185m	0	<b>0</b>	2	0
Molybdenum	ppm	ASTM D5185m	60	<b>61</b>	66	63
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	1010	<b>991</b>	970	1035
Calcium	ppm	ASTM D5185m	1070	<b>1049</b>	1105	1121
Phosphorus	ppm	ASTM D5185m	1150	<b>1050</b>	1095	1084
Zinc	ppm	ASTM D5185m	1270	<b>1257</b>	1294	1308
Sulfur	ppm	ASTM D5185m	2060	<b>3119</b>	3546	3563



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>4</b>	3	5
Sodium	ppm	ASTM D5185m		<b>2</b>	1	4
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	4	4

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.2</b>	0.1	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.2</b>	5.3	7.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.4</b>	18.0	19.2

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.7</b>	14.0	15.3
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>8.6</b>	8.8	7.6







# OIL ANALYSIS REPORT

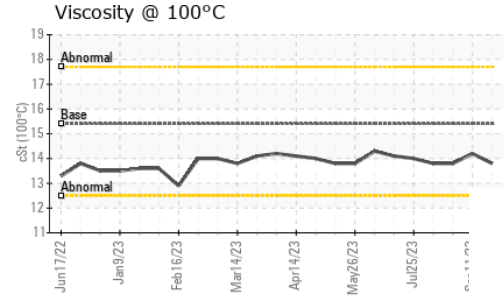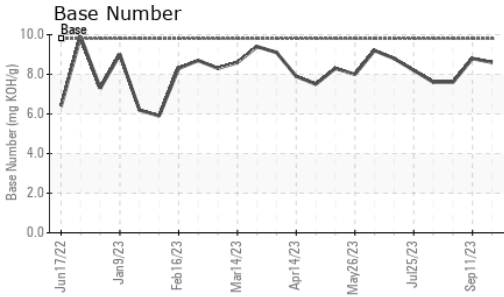

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.8</b>	14.2	13.8

## GRAPHS

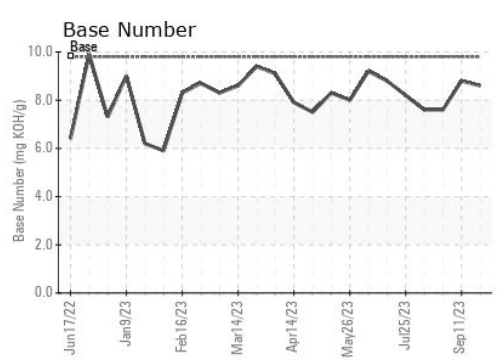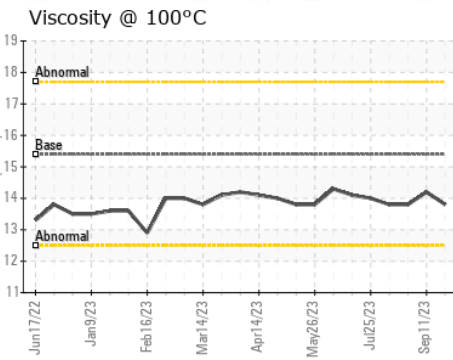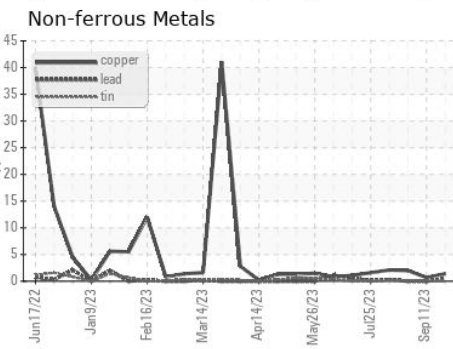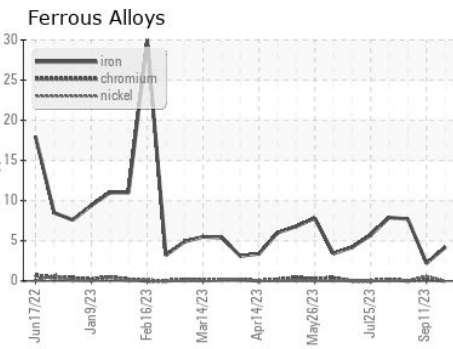

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0091241 **Received** : 09 Nov 2023  
**Lab Number** : **06003355** **Diagnosed** : 10 Nov 2023  
**Unique Number** : 10737117 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 166 - Phenix City**  
 18 Old Brickyard Rd  
 Phenix City, AL  
 US 36869  
 Contact: EDWARD CASHMAN  
 ecashman@gflenv.com  
 T:  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)