


PROBLEM SUMMARY


Area
(51465Z) Walgreens - Tractor
 Machine Id
[Walgreens - Tractor] 136A63338
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (11 GAL)

Sample Rating Trend

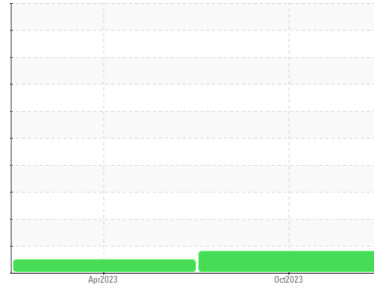


COMPONENT CONDITION SUMMARY


▲ Ferrous Alloys

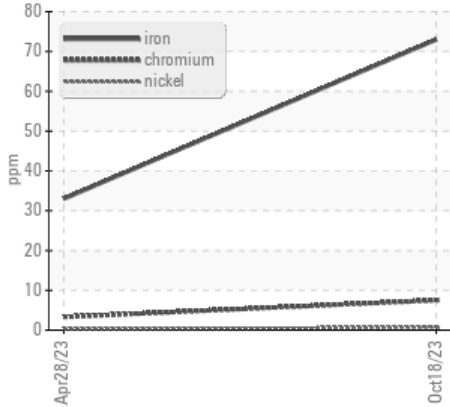

Glycol Contamination

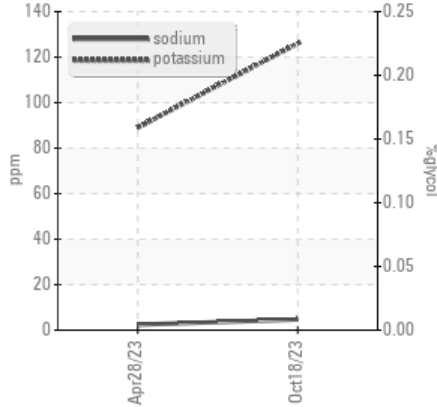

Aluminum (ppm)

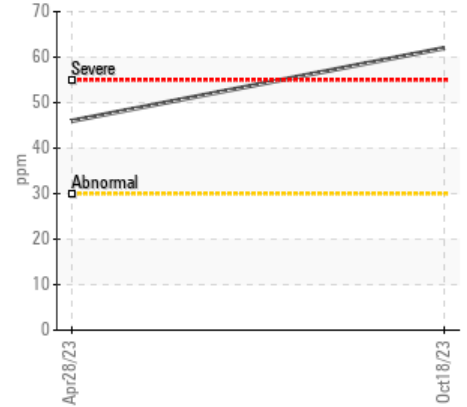

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status	ABNORMAL	NORMAL	---
Chromium	▲ 8	3	---

Customer Id: TSV1369
 Sample No.: PCA0106594
 Lab Number: 06003941
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.

HISTORICAL DIAGNOSIS

28 Apr 2023 Diag: Wes Davis

NORMAL




Resample at the next service interval to monitor. All component wear rates are normal. Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



OIL ANALYSIS REPORT

Sample Rating Trend

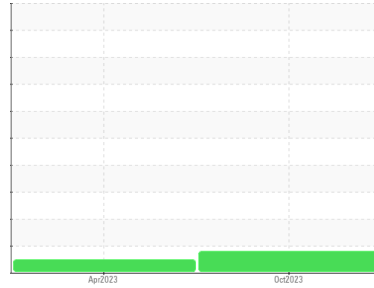

WEAR



Area
(51465Z) Walgreens - Tractor
Machine Id
[Walgreens - Tractor] 136A63338
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 10W30 (11 GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

The chromium level is abnormal. All other component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. No other contaminants were detected in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION method limit/base current history1 history2

Sample Number	Client Info	PCA0106594	PCA0094925	---
Sample Date	Client Info	18 Oct 2023	28 Apr 2023	---
Machine Age	mls	Client Info	141551	81082
Oil Age	mls	Client Info	60000	40000
Oil Changed	Client Info	Changed	Changed	---
Sample Status		ABNORMAL	NORMAL	---

CONTAMINATION method limit/base current history1 history2

Fuel	WC Method	>5	<1.0	<1.0	---
Glycol	WC Method		NEG	NEG	---

WEAR METALS method limit/base current history1 history2

Iron	ppm	ASTM D5185m	>80	73	33	---
Chromium	ppm	ASTM D5185m	>5	▲ 8	3	---
Nickel	ppm	ASTM D5185m	>2	<1	<1	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>30	62	46	---
Lead	ppm	ASTM D5185m	>30	1	0	---
Copper	ppm	ASTM D5185m	>150	129	106	---
Tin	ppm	ASTM D5185m	>5	2	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
Cadmium	ppm	ASTM D5185m		0	0	---

ADDITIVES method limit/base current history1 history2

Boron	ppm	ASTM D5185m	2	3	8	---
Barium	ppm	ASTM D5185m	0	0	0	---
Molybdenum	ppm	ASTM D5185m	50	59	54	---
Manganese	ppm	ASTM D5185m	0	2	2	---
Magnesium	ppm	ASTM D5185m	950	897	865	---
Calcium	ppm	ASTM D5185m	1050	1414	1266	---
Phosphorus	ppm	ASTM D5185m	995	954	876	---
Zinc	ppm	ASTM D5185m	1180	1151	1127	---
Sulfur	ppm	ASTM D5185m	2600	1589	2361	---

CONTAMINANTS method limit/base current history1 history2

Silicon	ppm	ASTM D5185m	>20	10	7	---
Sodium	ppm	ASTM D5185m		5	2	---
Potassium	ppm	ASTM D5185m	>20	126	89	---


INFRA-RED method limit/base current history1 history2

Soot %	%	*ASTM D7844	>3	1.2	0.4	---
Nitration	Abs/cm	*ASTM D7624	>20	15.8	8.7	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	26.1	19.5	---


FLUID DEGRADATION method limit/base current history1 history2

Oxidation	Abs/.1mm	*ASTM D7414	>25	29.9	18.8	---
Base Number (BN)	mg KOH/g	ASTM D2896		4.0	6.2	---

OIL ANALYSIS REPORT







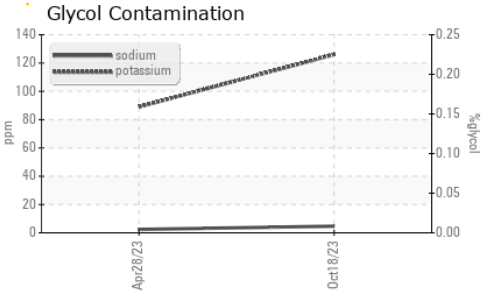


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

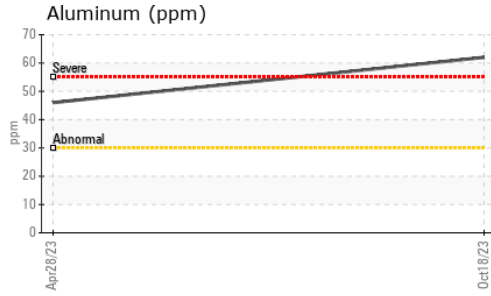

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	12.0	11.4

GRAPHS

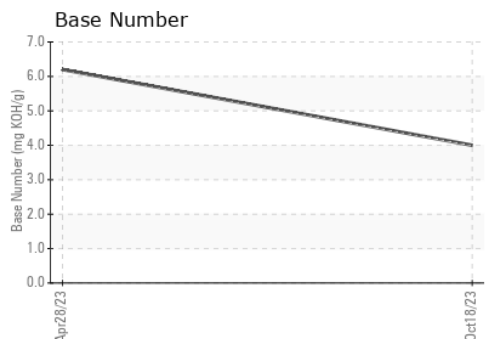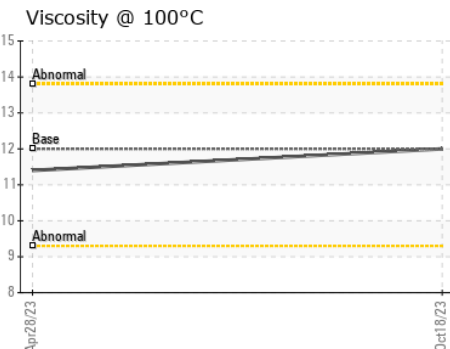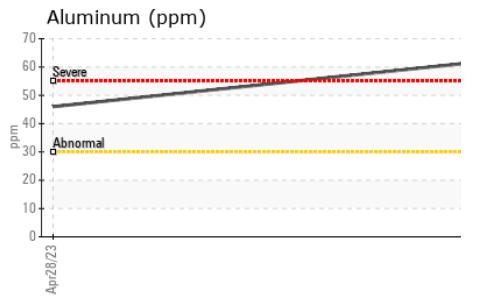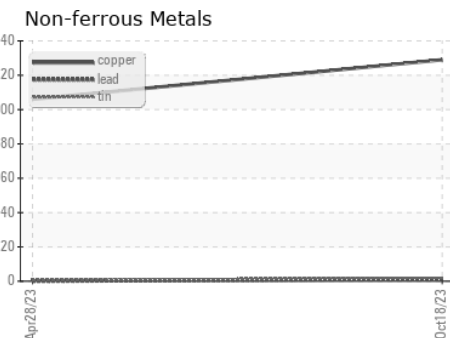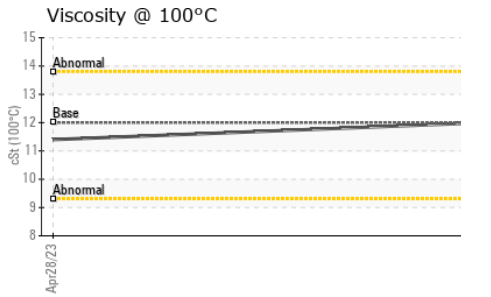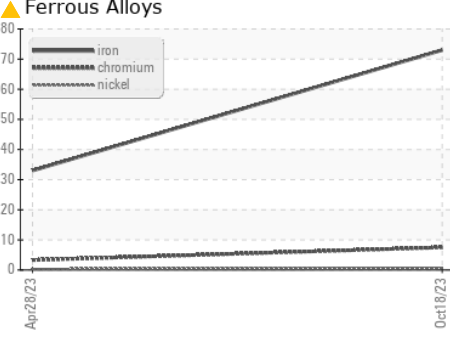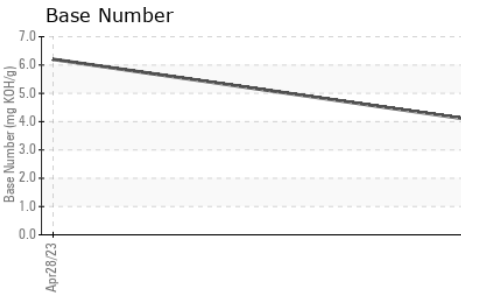

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0106594
Lab Number : **06003941**
Unique Number : 10737703
Test Package : FLEET

Transervice - Shop 1369 - Berkeley-Waxahachie
 710 Ovilla Road
 Waxahachie, TX
 US 75167
 Contact: Robert Beal
 rbeal@transervice.com
 T: (972)923-9928
 F: (972)923-9919

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)