

(TEMP) Walgreens - Yard Horse Machine Id [Walgreens - Yard Horse] 136A82250

Diesel Engine

PETRO CANADA DURON SHP 10W30 (11 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.






NORMAL


-				Oct2023		
SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0106595		
Sample Date		Client Info		19 Oct 2023		
Machine Age	hrs	Client Info		8551		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		Changed		
Sample Status				NORMAL		
CONTAMINATI	ON	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0		
Glycol		WC Method		NEG		
WEAR METALS	6	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	16		
Chromium	ppm	ASTM D5185m	>20	<1		
Nickel	ppm	ASTM D5185m	>4	0		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m	>3	0		
Aluminum	ppm	ASTM D5185m	>20	5		
Lead	ppm	ASTM D5185m	>40	0		
Copper	ppm	ASTM D5185m	>330	5		
Tin	ppm	ASTM D5185m	>15	<1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	3		
Barium	ppm	ASTM D5185m	0	0		
Molybdenum	ppm	ASTM D5185m	50	56		
Manganese	ppm	ASTM D5185m	0	<1		
Magnesium	ppm	ASTM D5185m	950	903		
Calcium	ppm	ASTM D5185m	1050	1087		
Phosphorus	ppm	ASTM D5185m	995	1039		
Zinc	ppm	ASTM D5185m	1180	1198		
Sulfur	ppm	ASTM D5185m	2600	2828		
CONTAMINAN	ΓS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	3		
Sodium	ppm	ASTM D5185m		<1		
Potassium	ppm	ASTM D5185m	>20	9		
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.5		
Nitration	Abs/cm	*ASTM D7624	>20	8.1		
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.7		
FLUID DEGRAD	ATION	method	limit/base	current	history1	history2
FLUID DEGRAD Oxidation	ATION Abs/.1mm	method *ASTM D7414		current 15.2	history1	history2
					· · · · · ·	, and the second se




OIL ANALYSIS REPORT

VISUAL





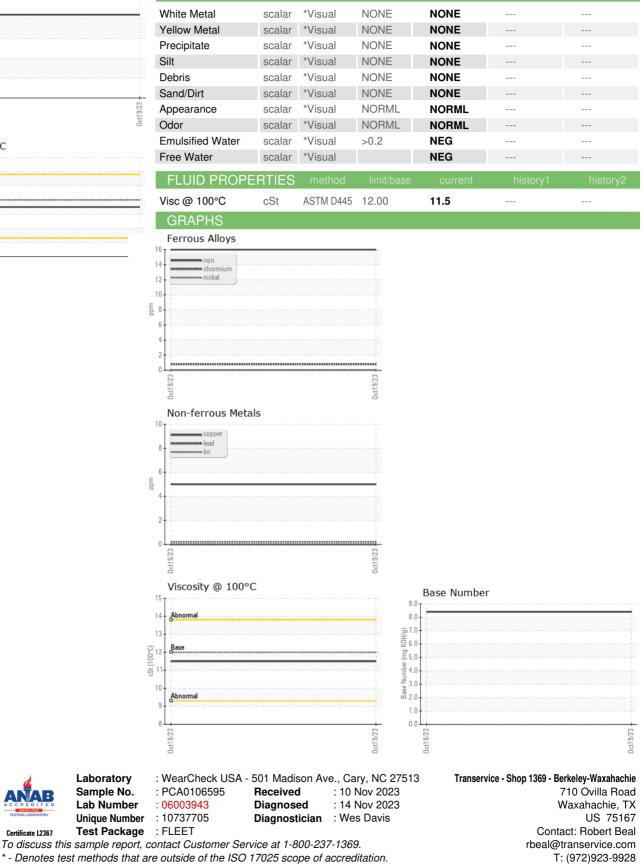

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

F: (972)923-9919