

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
ELEVATOR
 Machine Id
[ELEVATOR] MTU260 BLENDING DRAG
 Component
Gearbox
 Fluid
NOT GIVEN (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.
 NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|----------|----------|
| Sample Number | Client Info | | PCA0108399 | --- | --- |
| Sample Date | Client Info | | 08 Nov 2023 | --- | --- |
| Machine Age | hrs | Client Info | 0 | --- | --- |
| Oil Age | hrs | Client Info | 0 | --- | --- |
| Oil Changed | Client Info | | N/A | --- | --- |
| Sample Status | | | NORMAL | --- | --- |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|----------|--------|------------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m >200 | 49 | --- | --- |
| Chromium | ppm | ASTM D5185m >15 | <1 | --- | --- |
| Nickel | ppm | ASTM D5185m >15 | 0 | --- | --- |
| Titanium | ppm | ASTM D5185m | <1 | --- | --- |
| Silver | ppm | ASTM D5185m | 3 | --- | --- |
| Aluminum | ppm | ASTM D5185m >25 | 3 | --- | --- |
| Lead | ppm | ASTM D5185m >100 | 0 | --- | --- |
| Copper | ppm | ASTM D5185m >200 | 2 | --- | --- |
| Tin | ppm | ASTM D5185m >25 | 0 | --- | --- |
| Vanadium | ppm | ASTM D5185m | <1 | --- | --- |
| Cadmium | ppm | ASTM D5185m | <1 | --- | --- |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|-------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185m | 0 | --- | --- |
| Barium | ppm | ASTM D5185m | 8 | --- | --- |
| Molybdenum | ppm | ASTM D5185m | 0 | --- | --- |
| Manganese | ppm | ASTM D5185m | <1 | --- | --- |
| Magnesium | ppm | ASTM D5185m | 2 | --- | --- |
| Calcium | ppm | ASTM D5185m | 14 | --- | --- |
| Phosphorus | ppm | ASTM D5185m | 388 | --- | --- |
| Zinc | ppm | ASTM D5185m | 12 | --- | --- |
| Sulfur | ppm | ASTM D5185m | 13809 | --- | --- |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|-----------------|--------------|----------|----------|
| Silicon | ppm | ASTM D5185m >50 | 2 | --- | --- |
| Sodium | ppm | ASTM D5185m | 0 | --- | --- |
| Potassium | ppm | ASTM D5185m >20 | <1 | --- | --- |

FLUID DEGRADATION



| | method | limit/base | current | history1 | history2 |
|------------------|----------|------------|-------------|----------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D8045 | 0.76 | --- | --- |

VISUAL

| | method | limit/base | current | history1 | history2 |
|------------------|--------|---------------|--------------|----------|----------|
| White Metal | scalar | *Visual NONE | NONE | --- | --- |
| Yellow Metal | scalar | *Visual NONE | NONE | --- | --- |
| Precipitate | scalar | *Visual NONE | NONE | --- | --- |
| Silt | scalar | *Visual NONE | NONE | --- | --- |
| Debris | scalar | *Visual NONE | NONE | --- | --- |
| Sand/Dirt | scalar | *Visual NONE | NONE | --- | --- |
| Appearance | scalar | *Visual NORML | NORML | --- | --- |
| Odor | scalar | *Visual NORML | NORML | --- | --- |
| Emulsified Water | scalar | *Visual >0.2 | NEG | --- | --- |
| Free Water | scalar | *Visual | NEG | --- | --- |



OIL ANALYSIS REPORT



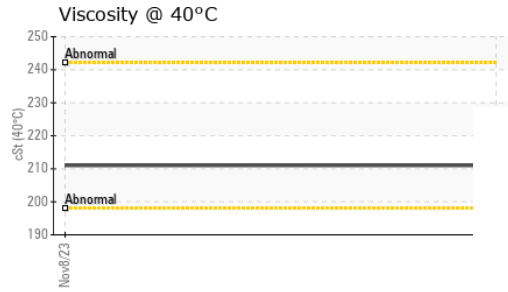
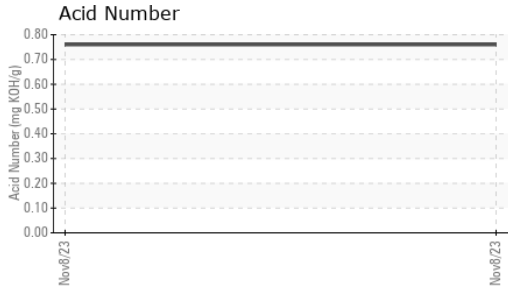


| FLUID PROPERTIES | | method | limit/base | current | history1 | history2 |
|------------------|-----|-----------|------------|---------|----------|----------|
| Visc @ 40°C | cSt | ASTM D445 | | 211 | --- | --- |

| SAMPLE IMAGES | | method | limit/base | current | history1 | history2 |
|---------------|--|--------|------------|---------|----------|----------|
|---------------|--|--------|------------|---------|----------|----------|

| | | | | | | |
|--------|--|--|--|--|----------|----------|
| Color | | | | | no image | no image |
| Bottom | | | | | no image | no image |

GRAPHS

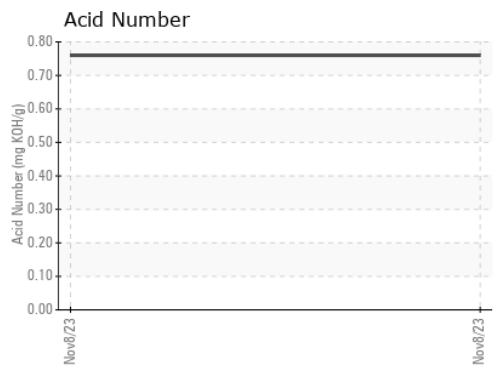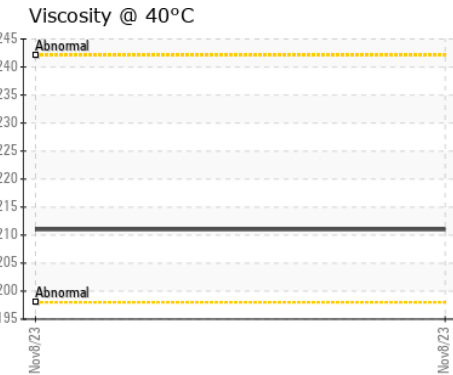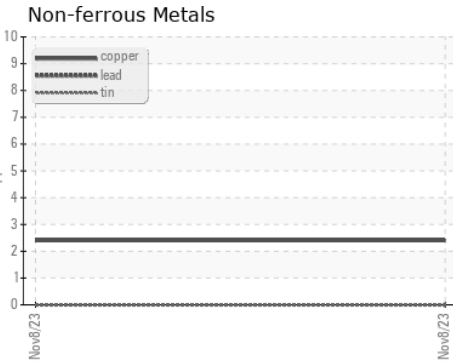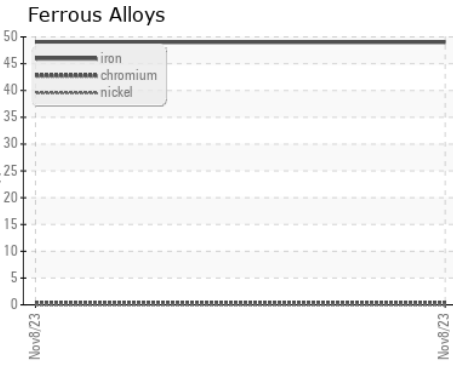

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0108399 **Received** : 10 Nov 2023
Lab Number : 06004464 **Diagnosed** : 13 Nov 2023
Unique Number : 10738226 **Diagnostician** : Wes Davis
Test Package : PLANT

Ardent Mills - Summit - Mount Pocono
 258 HARVEST LANE
 SUMMIT, PA
 US 18346
 Contact: MICHAL NOWAK
 MICHAL.NOWAK@ARDENTMILLS.COM
 T: (570)839-8322
 F: (570)839-8327

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)