


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

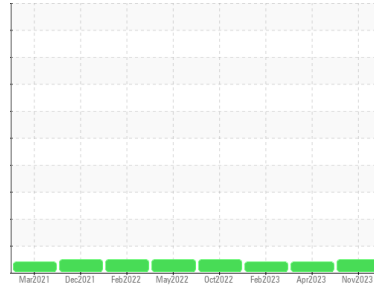

Machine Id  
**2026793**

Component  
**Hydraulic System**

Fluid  
**PETRO CANADA HYDREX MV 36 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the fluid.

### Fluid Condition

The condition of the fluid is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0101144</b>	PCA0092433	PCA0087242
Sample Date	Client Info		<b>04 Nov 2023</b>	20 Apr 2023	05 Feb 2023
Machine Age	mls	Client Info	<b>0</b>	0	20000
Oil Age	mls	Client Info	<b>0</b>	40000	0
Oil Changed	Client Info		<b>N/A</b>	Not Changd	Not Changd
Sample Status			<b>NORMAL</b>	ABNORMAL	ABNORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	<b>2</b>	5	5
Chromium	ppm	ASTM D5185m >20	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	0
Lead	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m >20	<b>1</b>	<1	1
Tin	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>&lt;1</b>	3	3
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 0	<b>&lt;1</b>	2	3
Manganese	ppm	ASTM D5185m 1	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 0	<b>24</b>	25	24
Calcium	ppm	ASTM D5185m 135	<b>126</b>	135	146
Phosphorus	ppm	ASTM D5185m 236	<b>354</b>	351	344
Zinc	ppm	ASTM D5185m 317	<b>466</b>	437	439
Sulfur	ppm	ASTM D5185m 561	<b>1325</b>	1453	1457

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	<b>4</b>	4	4
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	1
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	1	0


## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual NONE	<b>LIGHT</b>	NONE	NONE
Debris	scalar	*Visual NONE	<b>NONE</b>	▲ MODER	▲ MODER
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual >0.05	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual	<b>NEG</b>	NEG	NEG

## FLUID PROPERTIES




	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 32.25	<b>34.9</b>	35.4	35.9

# OIL ANALYSIS REPORT

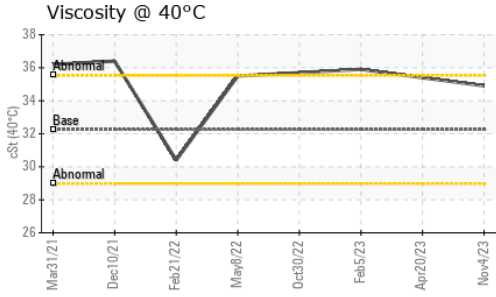

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

## GRAPHS

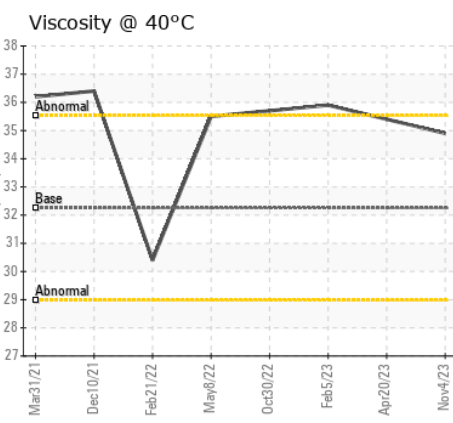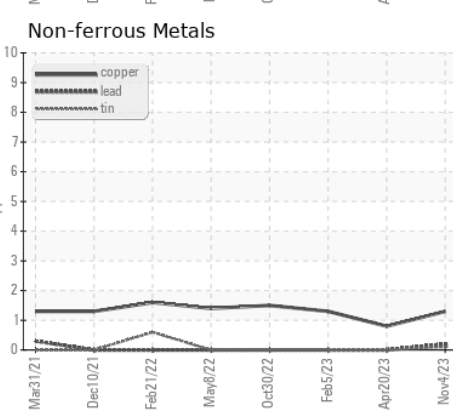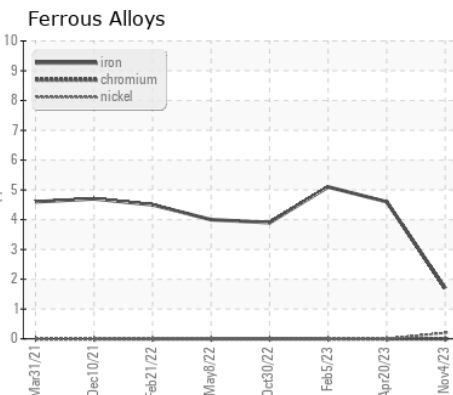

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0101144 **Received** : 10 Nov 2023  
**Lab Number** : 06004758 **Diagnosed** : 14 Nov 2023  
**Unique Number** : 10738520 **Diagnostician** : Don Baldrige  
**Test Package** : FLEET

**PERDUE FARMS - SALISBURY**  
 7036 ZION CHURCH ROAD  
 SALISBURY, MD  
 US 21802  
 Contact: RICHARD O'NEAL  
 richard.oneal@perdue.com  
 T: (410)543-3628  
 F: (410)341-2164

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)