

# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**CALFLO AF**  
 Component  
**New (Unused) Oil**  
 Fluid  
**{not provided} (--- GAL)**

## DIAGNOSIS

### Recommendation

This is a baseline read-out on the submitted sample. We were unable to perform a particle count due to insufficient sample.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1 | history2 |
|---------------|-------------|-------------|--------------------|----------|----------|
| Sample Number | Client Info |             | <b>PCA0075742</b>  | ---      | ---      |
| Sample Date   | Client Info |             | <b>25 Oct 2023</b> | ---      | ---      |
| Machine Age   | hrs         | Client Info | <b>0</b>           | ---      | ---      |
| Oil Age       | hrs         | Client Info | <b>0</b>           | ---      | ---      |
| Oil Changed   | Client Info |             | <b>N/A</b>         | ---      | ---      |
| Sample Status |             |             | <b>NORMAL</b>      | ---      | ---      |

## WEAR METALS

|          | method | limit/base  | current      | history1 | history2 |
|----------|--------|-------------|--------------|----------|----------|
| Iron     | ppm    | ASTM D5185m | <b>0</b>     | ---      | ---      |
| Chromium | ppm    | ASTM D5185m | <b>0</b>     | ---      | ---      |
| Nickel   | ppm    | ASTM D5185m | <b>0</b>     | ---      | ---      |
| Titanium | ppm    | ASTM D5185m | <b>0</b>     | ---      | ---      |
| Silver   | ppm    | ASTM D5185m | <b>0</b>     | ---      | ---      |
| Aluminum | ppm    | ASTM D5185m | <b>0</b>     | ---      | ---      |
| Lead     | ppm    | ASTM D5185m | <b>&lt;1</b> | ---      | ---      |
| Copper   | ppm    | ASTM D5185m | <b>0</b>     | ---      | ---      |
| Tin      | ppm    | ASTM D5185m | <b>&lt;1</b> | ---      | ---      |
| Vanadium | ppm    | ASTM D5185m | <b>0</b>     | ---      | ---      |
| Cadmium  | ppm    | ASTM D5185m | <b>0</b>     | ---      | ---      |

## ADDITIVES

|            | method | limit/base  | current      | history1 | history2 |
|------------|--------|-------------|--------------|----------|----------|
| Boron      | ppm    | ASTM D5185m | <b>0</b>     | ---      | ---      |
| Barium     | ppm    | ASTM D5185m | <b>0</b>     | ---      | ---      |
| Molybdenum | ppm    | ASTM D5185m | <b>0</b>     | ---      | ---      |
| Manganese  | ppm    | ASTM D5185m | <b>0</b>     | ---      | ---      |
| Magnesium  | ppm    | ASTM D5185m | <b>0</b>     | ---      | ---      |
| Calcium    | ppm    | ASTM D5185m | <b>&lt;1</b> | ---      | ---      |
| Phosphorus | ppm    | ASTM D5185m | <b>262</b>   | ---      | ---      |
| Zinc       | ppm    | ASTM D5185m | <b>0</b>     | ---      | ---      |
| Sulfur     | ppm    | ASTM D5185m | <b>7</b>     | ---      | ---      |

## CONTAMINANTS

|           | method | limit/base      | current    | history1 | history2 |
|-----------|--------|-----------------|------------|----------|----------|
| Silicon   | ppm    | ASTM D5185m     | <b>4</b>   | ---      | ---      |
| Sodium    | ppm    | ASTM D5185m     | <b>0</b>   | ---      | ---      |
| Potassium | ppm    | ASTM D5185m >20 | <b>0</b>   | ---      | ---      |
| Water     | %      | ASTM D6304      | <b>NEG</b> | ---      | ---      |




## FLUID DEGRADATION

|                  | method   | limit/base | current      | history1 | history2 |
|------------------|----------|------------|--------------|----------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D8045 | <b>0.194</b> | ---      | ---      |

## VISUAL

|                  | method | limit/base | current    | history1     | history2 |
|------------------|--------|------------|------------|--------------|----------|
| White Metal      | scalar | *Visual    | NONE       | <b>NONE</b>  | ---      |
| Yellow Metal     | scalar | *Visual    | NONE       | <b>NONE</b>  | ---      |
| Precipitate      | scalar | *Visual    | NONE       | <b>NONE</b>  | ---      |
| Silt             | scalar | *Visual    | NONE       | <b>NONE</b>  | ---      |
| Debris           | scalar | *Visual    | NONE       | <b>NONE</b>  | ---      |
| Sand/Dirt        | scalar | *Visual    | NONE       | <b>NONE</b>  | ---      |
| Appearance       | scalar | *Visual    | NORML      | <b>NORML</b> | ---      |
| Odor             | scalar | *Visual    | NORML      | <b>NORML</b> | ---      |
| Emulsified Water | scalar | *Visual    | <b>NEG</b> | ---          | ---      |
| Free Water       | scalar | *Visual    | <b>NEG</b> | ---          | ---      |





# OIL ANALYSIS REPORT

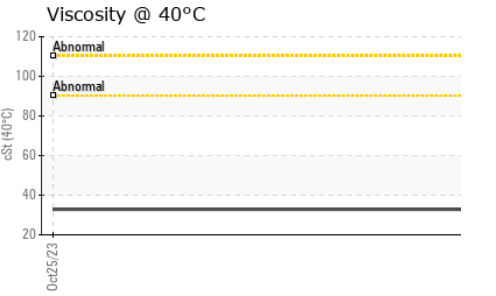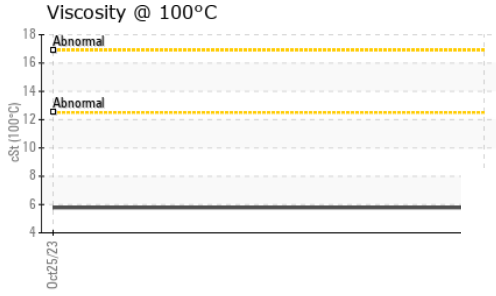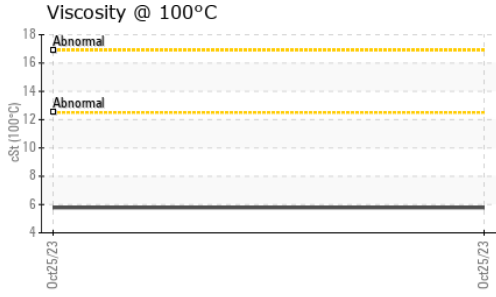

| FLUID PROPERTIES     |       | method     | limit/base | current      | history1 | history2 |
|----------------------|-------|------------|------------|--------------|----------|----------|
| Visc @ 40°C          | cSt   | ASTM D445  |            | <b>32.85</b> | ---      | ---      |
| Visc @ 100°C         | cSt   | ASTM D445  |            | <b>5.78</b>  | ---      | ---      |
| Viscosity Index (VI) | Scale | ASTM D2270 |            | <b>118</b>   | ---      | ---      |

| SAMPLE IMAGES |  | method | limit/base | current  | history1 | history2 |
|---------------|--|--------|------------|----------|----------|----------|
| Color         |  |        |            | no image | no image |          |
| Bottom        |  |        |            | no image | no image |          |

## GRAPHS

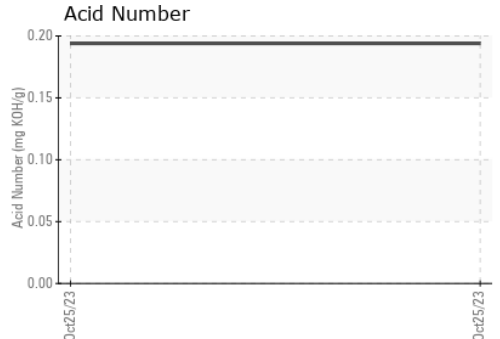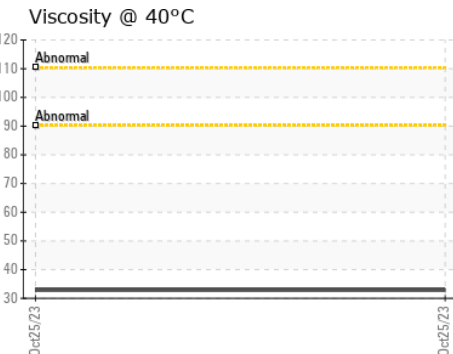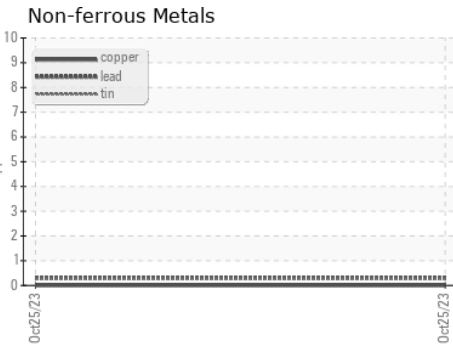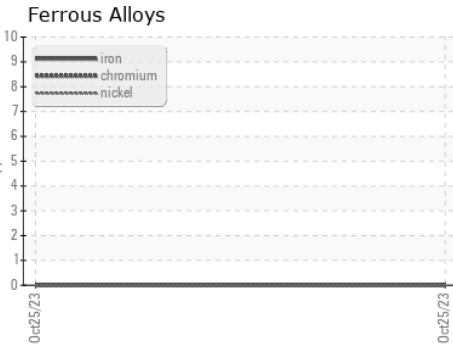

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0075742      **Received** : 10 Nov 2023  
**Lab Number** : **06004761**      **Diagnosed** : 05 Dec 2023  
**Unique Number** : 10738523      **Diagnostician** : Doug Bogart  
**Test Package** : MOB 2 ( Additional Tests: FT-IR, ICP-NewOil, KF, KV100, PrtCount, VI )      **Contact:** KATRINA THOM

**COLE OIL AND PROPANE**  
 265 FOREST AVE  
 FOND DU LAC, WI  
 US 54935

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: