




# OIL ANALYSIS REPORT

Sample Rating Trend

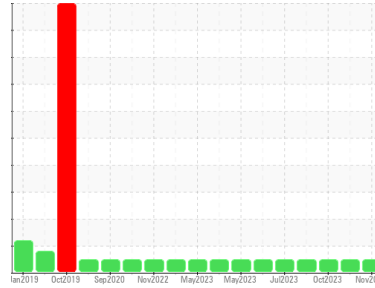

**NORMAL**



Machine Id  
**728050-361688**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0090305</b>	GFL0090188	GFL0090263
Sample Date	Client Info		<b>09 Nov 2023</b>	01 Nov 2023	19 Oct 2023
Machine Age	hrs	Client Info	<b>2763</b>	2204	2122
Oil Age	hrs	Client Info	<b>600</b>	600	150
Oil Changed	Client Info		<b>Changed</b>	Changed	Not Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>4</b>	12	7
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m >3	<b>&lt;1</b>	<1	0
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	1	2
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m >330	<b>&lt;1</b>	1	<1
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>&lt;1</b>	0	0
Barium	ppm	ASTM D5185m 0	<b>0</b>	4	0
Molybdenum	ppm	ASTM D5185m 60	<b>59</b>	58	49
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m 1010	<b>929</b>	851	870
Calcium	ppm	ASTM D5185m 1070	<b>1031</b>	983	902
Phosphorus	ppm	ASTM D5185m 1150	<b>1022</b>	930	870
Zinc	ppm	ASTM D5185m 1270	<b>1217</b>	1167	1141
Sulfur	ppm	ASTM D5185m 2060	<b>3206</b>	3099	2645

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	5	3
Sodium	ppm	ASTM D5185m	<b>2</b>	9	12
Potassium	ppm	ASTM D5185m >20	<b>2</b>	2	4

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.1</b>	0.4	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>5.3</b>	8.7	7.0
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.0</b>	19.7	18.5

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.6</b>	16.4	14.4
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.9</b>	7.9	7.7







# OIL ANALYSIS REPORT

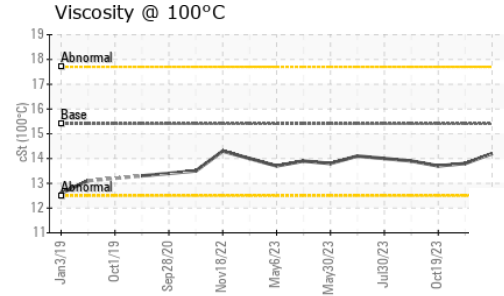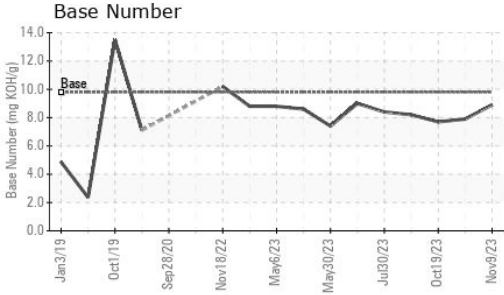

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.2</b>	13.8	13.7

## GRAPHS

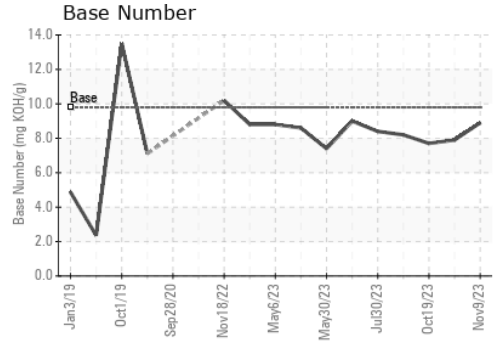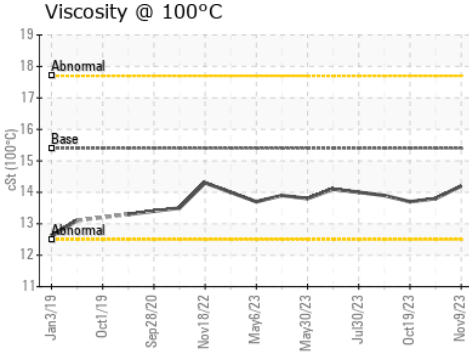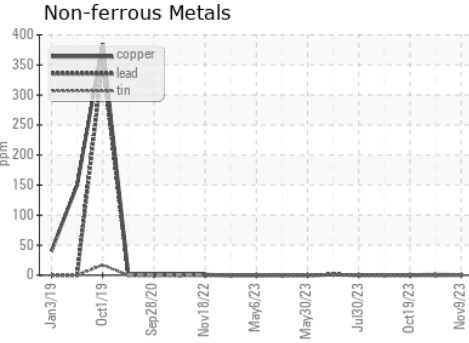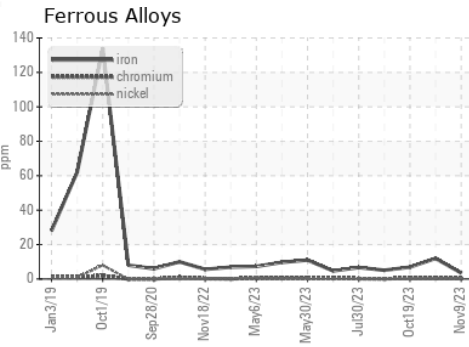

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0090305 **Received** : 13 Nov 2023  
**Lab Number** : **06005153** **Diagnosed** : 13 Nov 2023  
**Unique Number** : 10738915 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 821 - Ozarks Hauling**  
 33924 Olath Drive  
 Lebanon, MO  
 US 65536  
 Contact: Landen Johnson  
 landen.johnson@gflenv.com  
 T: (417)664-0010  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)