




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

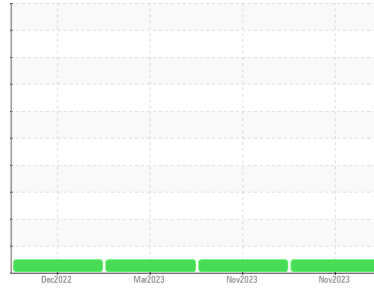

Machine Id  
**351161**  
 Component  
**Gasoline Engine**  
 Fluid  
**GASOLINE ENGINE OIL SAE 5W30 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0098764</b>	GFL0065481	GFL0051287
Sample Date	Client Info		<b>08 Nov 2023</b>	03 Nov 2023	07 Mar 2023
Machine Age	mls	Client Info	<b>223198</b>	5000	0
Oil Age	mls	Client Info	<b>5000</b>	5000	0
Oil Changed	Client Info		<b>Changed</b>	Changed	Not Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >150	<b>15</b>	36	19
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	2	<1
Nickel	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m	<b>1</b>	<1	5
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m >40	<b>3</b>	4	3
Lead	ppm	ASTM D5185m >50	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m >155	<b>8</b>	6	7
Tin	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 75	<b>75</b>	28	45
Barium	ppm	ASTM D5185m 5	<b>&lt;1</b>	<1	3
Molybdenum	ppm	ASTM D5185m 100	<b>120</b>	100	256
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	1	<1
Magnesium	ppm	ASTM D5185m 12	<b>524</b>	770	527
Calcium	ppm	ASTM D5185m 2100	<b>1641</b>	1267	1242
Phosphorus	ppm	ASTM D5185m 650	<b>898</b>	839	639
Zinc	ppm	ASTM D5185m 850	<b>1013</b>	1150	787
Sulfur	ppm	ASTM D5185m 2500	<b>3747</b>	2939	2054

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	<b>12</b>	15	14
Sodium	ppm	ASTM D5185m >400	<b>&lt;1</b>	3	3
Potassium	ppm	ASTM D5185m >20	<b>2</b>	3	1

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.3</b>	11.5	10.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.6</b>	23.5	20.6

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.4</b>	16.2	13.6
Base Number (BN)	mg KOH/g	ASTM D2896	<b>4.7</b>	6.9	4.6







# OIL ANALYSIS REPORT

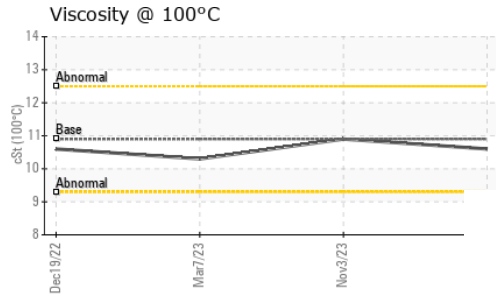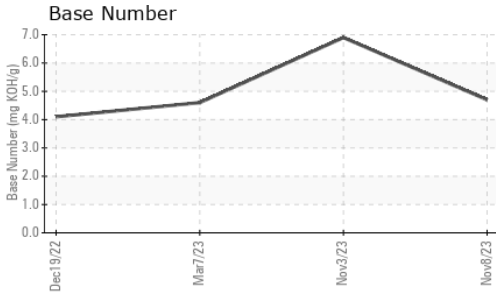

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	10.9	<b>10.6</b>	10.9	10.3

## GRAPHS

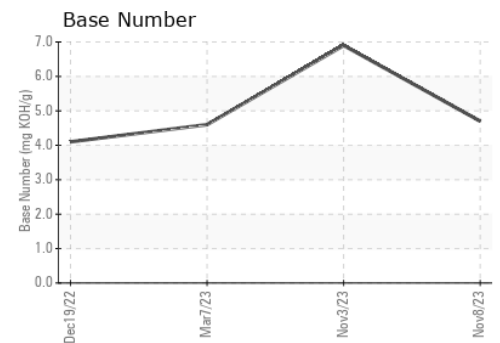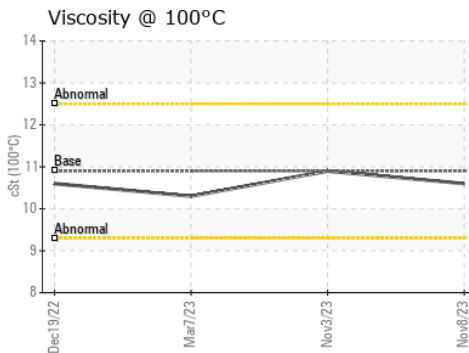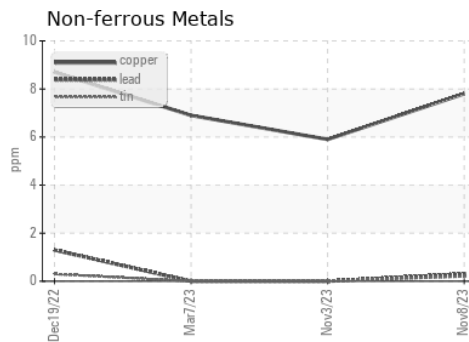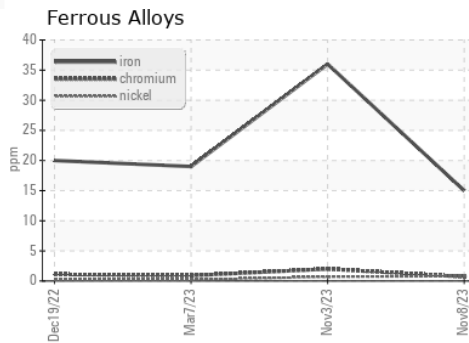

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0098764 **Received** : 13 Nov 2023  
**Lab Number** : **06005175** **Diagnosed** : 15 Nov 2023  
**Unique Number** : 10738937 **Diagnostician** : Don Baldrige  
**Test Package** : FLEET

**GFL Environmental - 829 - Wilco Hauling**  
 5054 Highway HH  
 Hartville, MO  
 US 65667  
 Contact: James Jones  
 james.jones@gflenv.com  
 T: (417)349-5006  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)