




PROBLEM SUMMARY

Sample Rating Trend

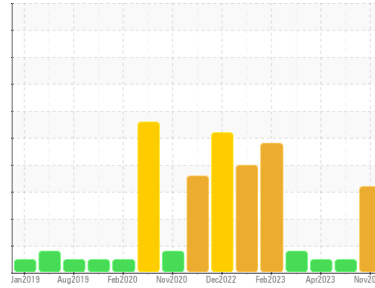


GLYCOL




Machine Id
727044-361326
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Glycol Contamination

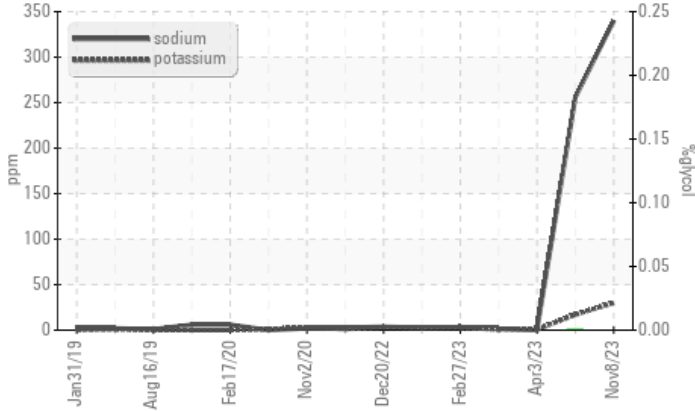

▲ Non-ferrous Metals

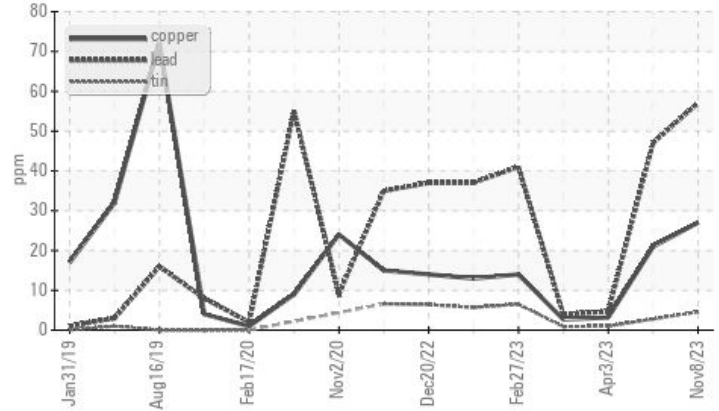

RECOMMENDATION

We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				ABNORMAL	NORMAL	NORMAL
Lead	ppm	ASTM D5185m	>40	▲ 57	47	5
Sodium	ppm	ASTM D5185m		▲ 340	256	0
Potassium	ppm	ASTM D5185m	>20	▲ 30	17	<1

Customer Id: GFL829
 Sample No.: GFL0098763
 Lab Number: 06005176
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Glycol Access	---	---	?	We advise that you check for the source of the coolant leak.

HISTORICAL DIAGNOSIS

06 Oct 2023 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. Metal levels are typical for a new component breaking in. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



03 Apr 2023 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



17 Mar 2023 Diag: Wes Davis

FUEL



No corrective action is recommended at this time. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. All component wear rates are normal. Light fuel dilution occurring. No other contaminants were detected in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

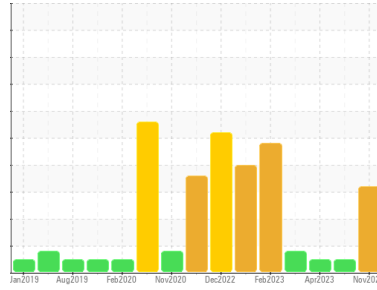

GLYCOL



Machine Id
727044-361326
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

The lead level is abnormal. All other component wear rates are normal.

Contamination

Sodium and/or potassium levels are high.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0098763	GFL0065500	GFL0065595
Sample Date	Client Info		08 Nov 2023	06 Oct 2023	03 Apr 2023
Machine Age	hrs	Client Info	1010	804	0
Oil Age	hrs	Client Info	600	150	0
Oil Changed	Client Info		Changed	Not Changd	Changed
Sample Status			ABNORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	<1.0

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	65	42	30
Chromium	ppm	ASTM D5185m >20	1	<1	<1
Nickel	ppm	ASTM D5185m >5	1	<1	<1
Titanium	ppm	ASTM D5185m >2	<1	0	0
Silver	ppm	ASTM D5185m >2	<1	0	0
Aluminum	ppm	ASTM D5185m >20	5	0	0
Lead	ppm	ASTM D5185m >40	▲ 57	47	5
Copper	ppm	ASTM D5185m >330	27	21	3
Tin	ppm	ASTM D5185m >15	5	3	1
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	<1	<1	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	0	0	<1
Barium	ppm	ASTM D5185m 0	<1	<1	0
Molybdenum	ppm	ASTM D5185m 60	84	75	51
Manganese	ppm	ASTM D5185m 0	<1	<1	<1
Magnesium	ppm	ASTM D5185m 1010	883	835	778
Calcium	ppm	ASTM D5185m 1070	1013	942	910
Phosphorus	ppm	ASTM D5185m 1150	951	911	870
Zinc	ppm	ASTM D5185m 1270	1170	1112	1034
Sulfur	ppm	ASTM D5185m 2060	2844	2777	2366

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	7	5	3
Sodium	ppm	ASTM D5185m	▲ 340	256	0
Potassium	ppm	ASTM D5185m >20	▲ 30	17	<1
Glycol	%	*ASTM D2982	NEG	0.0	NEG

INFRA-RED





	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	2.8	2	1.6
Nitration	Abs/cm	*ASTM D7624 >20	9.8	8.1	6.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	24.3	20.6	18.4

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	13.9	13.3	12.5
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	7.7	8.8	7.8







OIL ANALYSIS REPORT

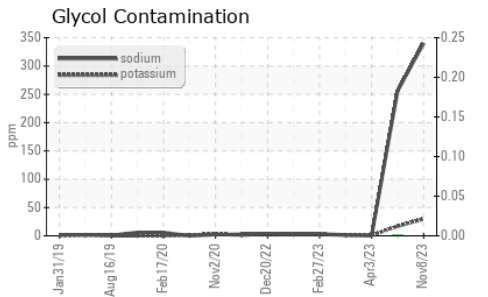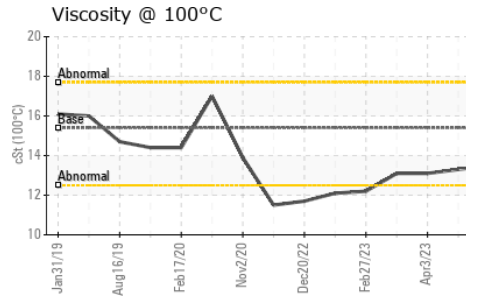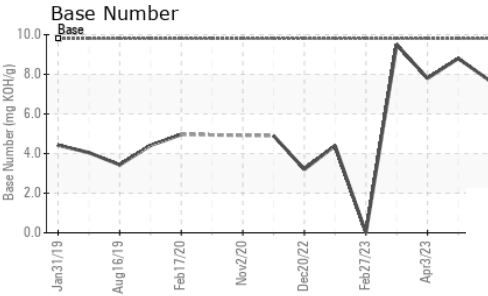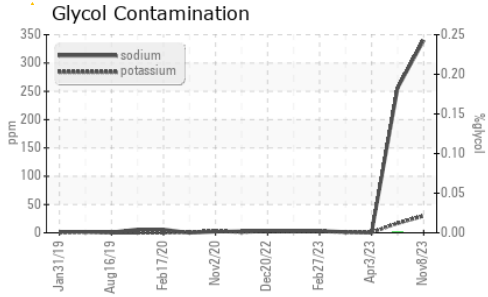

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.5	13.3

GRAPHS

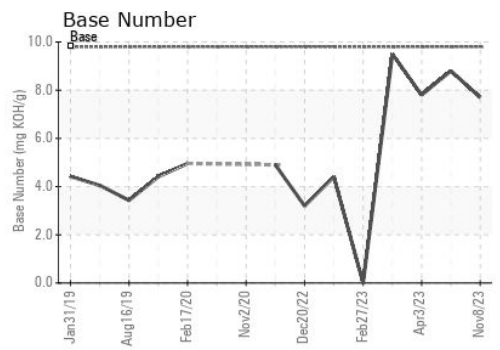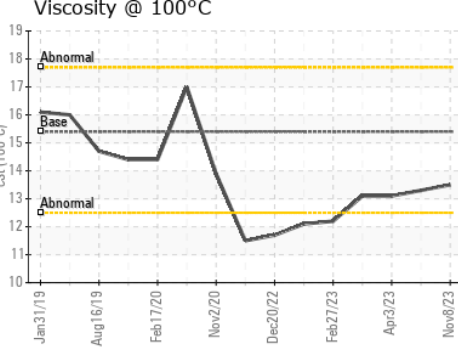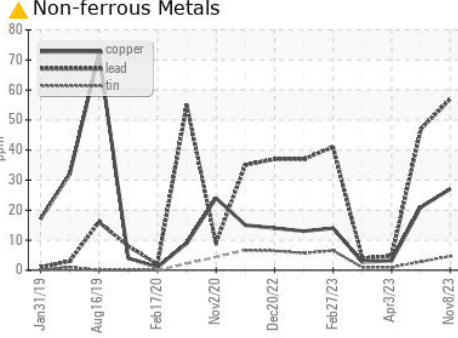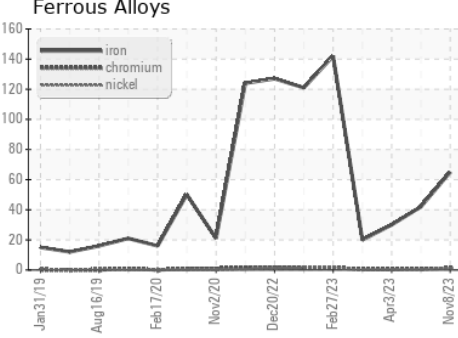

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0098763 **Received** : 13 Nov 2023
Lab Number : 06005176 **Diagnosed** : 15 Nov 2023
Unique Number : 10738938 **Diagnostician** : Jonathan Hester
Test Package : FLEET (Additional Tests: Glycol)

GFL Environmental - 829 - Wilco Hauling
 5054 Highway HH
 Hartville, MO
 US 65667
 Contact: James Jones
 james.jones@gflenv.com
 T: (417)349-5006
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)