




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**934024**  
 Component  
**Natural Gas Engine**  
 Fluid  
**PETRO CANADA DURON GEO LD 15W40 (--- GAL)**

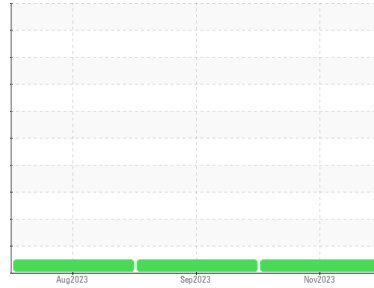

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0095169</b>	GFL0090678	GFL0090640
Sample Date	Client Info		<b>09 Nov 2023</b>	21 Sep 2023	17 Aug 2023
Machine Age	hrs	Client Info	<b>472</b>	318	499
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>Not Changed</b>	Not Changed	Not Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<b>6</b>	33	36
Chromium	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m >5	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>&lt;1</b>	<1	<1
Aluminum	ppm	ASTM D5185m >25	<b>3</b>	0	5
Lead	ppm	ASTM D5185m >40	<b>3</b>	<1	0
Copper	ppm	ASTM D5185m >150	<b>3</b>	13	15
Tin	ppm	ASTM D5185m >4	<b>&lt;1</b>	1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 50	<b>6</b>	29	39
Barium	ppm	ASTM D5185m 5	<b>&lt;1</b>	3	<1
Molybdenum	ppm	ASTM D5185m 50	<b>71</b>	49	50
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	12	13
Magnesium	ppm	ASTM D5185m 560	<b>734</b>	800	843
Calcium	ppm	ASTM D5185m 1510	<b>2054</b>	1313	1310
Phosphorus	ppm	ASTM D5185m 780	<b>960</b>	761	810
Zinc	ppm	ASTM D5185m 870	<b>1244</b>	936	958
Sulfur	ppm	ASTM D5185m 2040	<b>3251</b>	2914	3063

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>10</b>	30	34
Sodium	ppm	ASTM D5185m	<b>1</b>	4	5
Potassium	ppm	ASTM D5185m >20	<b>3</b>	4	2

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0</b>	0	0
Nitration	Abs/cm	*ASTM D7624 >20	<b>11.1</b>	10.1	8.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>24.5</b>	20.3	20.4

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>20.0</b>	19.0	18.1
Base Number (BN)	mg KOH/g	ASTM D2896 10.2	<b>2.7</b>	6.5	8.6







# OIL ANALYSIS REPORT

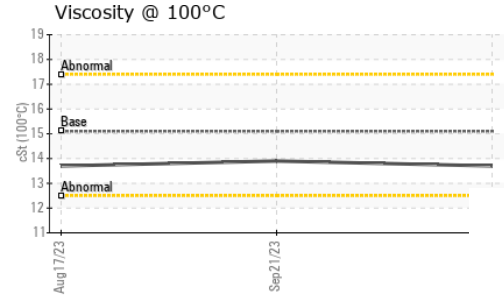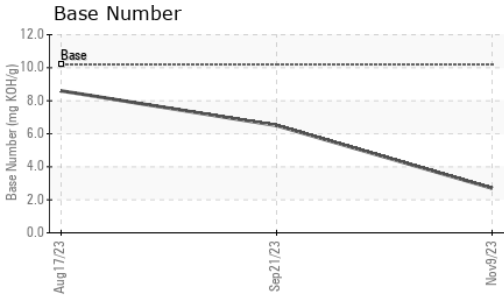

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.1	13.7	13.9

## GRAPHS

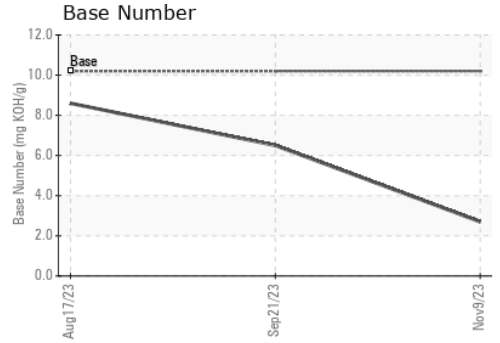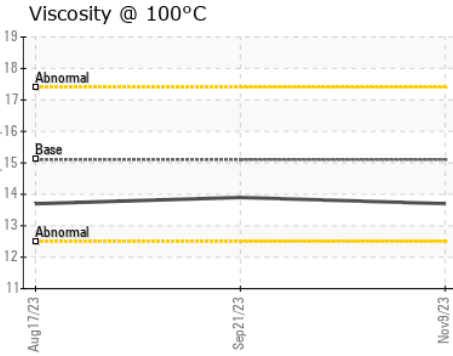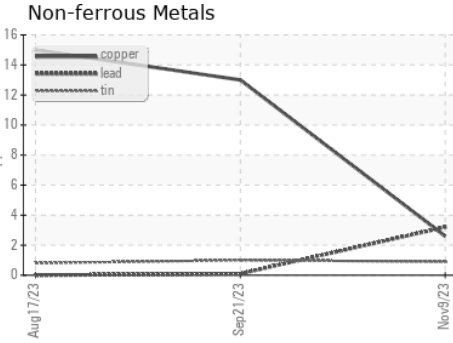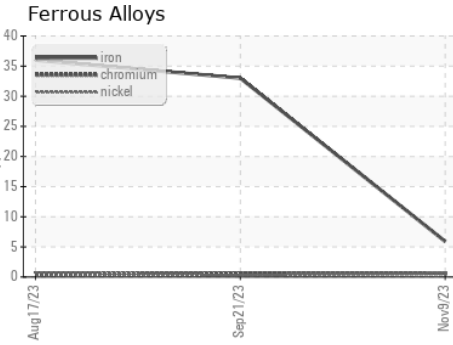

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0095169 **Received** : 13 Nov 2023  
**Lab Number** : 06005190 **Diagnosed** : 13 Nov 2023  
**Unique Number** : 10738952 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 836 - Kansas City Hauling**  
 7801 East Truman Road  
 Kansas City, MO  
 US 64126  
 Contact: Robert Hart  
 rhart@gflenv.com  
 T: (580)461-1509  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)