

OIL ANALYSIS REPORT

Sample Rating Trend





MACK 420055


Component **Diesel Engine** Fluid


PETRO CANADA DURON SHP 15W40 (--- LTR)

DIAGNOSIS	SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Recommendation	Sample Number		Client Info		GFL0087980	GFL0092418	GFL0092419
Resample at the next service interval to monitor.	Sample Date		Client Info		10 Nov 2023	31 Oct 2023	17 Oct 2023
Wear	Machine Age	hrs	Client Info		9778	9709	9601
All component wear rates are normal.	Oil Age	hrs	Client Info		852	783	675
Contamination	Oil Changed		Client Info		Changed	Not Changd	N/A
There is no indication of any contamination in the	Sample Status				NORMAL	NORMAL	ATTENTION
oil.	CONTAMINAT	ION	method	limit/base	current	history1	history2
Fluid Condition	Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
The BN result indicates that there is suitable	Glycol		WC Method		NEG	NEG	NEG
alkalinity remaining in the oil. The condition of the oil is suitable for further service.	WEAR METAL	s	method	limit/base		history1	history2
	Iron	ppm	ASTM D5185m		2	<1	6
	Chromium	ppm	ASTM D5185m		- <1	0	<1
	Nickel	ppm	ASTM D5185m		<1	<1	<1
	Titanium	ppm	ASTM D5185m		<1	0	0
	Silver	ppm	ASTM D5185m		<1	<1	0
	Aluminum	ppm	ASTM D5185m		2	2	3
	Lead	ppm	ASTM D5185m		- <1	1	<1
	Copper	ppm	ASTM D5185m		1	0	4
	Tin	ppm	ASTM D5185m		<1	<1	<1
	Vanadium	ppm	ASTM D5185m		<1	<1	0
	Cadmium	ppm	ASTM D5185m		<1	0	0
	ADDITIVES		method	limit/base	current	history1	history2
	Boron	ppm	ASTM D5185m	0	10	13	71
	Barium	ppm	ASTM D5185m	0	0	0	0
	Molybdenum	ppm	ASTM D5185m	60	65	62	79
	Manganese	ppm	ASTM D5185m	0	<1	<1	0
	Magnesium	ppm	ASTM D5185m	1010	848	879	304
	Calcium	ppm	ASTM D5185m	1070	1160	1095	1680
	Phosphorus	ppm	ASTM D5185m	1150	1005	979	895
	Zinc	ppm	ASTM D5185m	1270	1194	1255	1146
	Sulfur	ppm	ASTM D5185m	2060	3279	3251	3609
	CONTAMINAN	ITS	method	limit/base	current	history1	history2
	Silicon	ppm	ASTM D5185m	>25	4	4	7
	Sodium	ppm	ASTM D5185m		0	<1	1
	Potassium	ppm	ASTM D5185m	>20	2	1	2
	INFRA-RED		method	limit/base	current	history1	history2
	Soot %	%	*ASTM D7844	>4	0.1	0.1	0.1
	Nitration	Abs/cm	*ASTM D7624	>20	5.6	6.3	7.1
	Sulfation	Abs/.1mm	*ASTM D7415	>30	18.0	17.0	17.7
	FLUID DEGRAI	DATION	method	limit/base	current	history1	history2
	Oxidation	Abs/.1mm	*ASTM D7414	>25	13.7	12.8	13.5
	Base Number (BN)				8.5	9.4	6.5
	· · · /	0 0					




OIL ANALYSIS REPORT

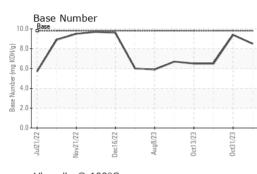



VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPE	RTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.6	13.6	1 1.6
GRAPHS						
Ferrous Alloys						
iron chromium 8						
	-	$ \wedge $				

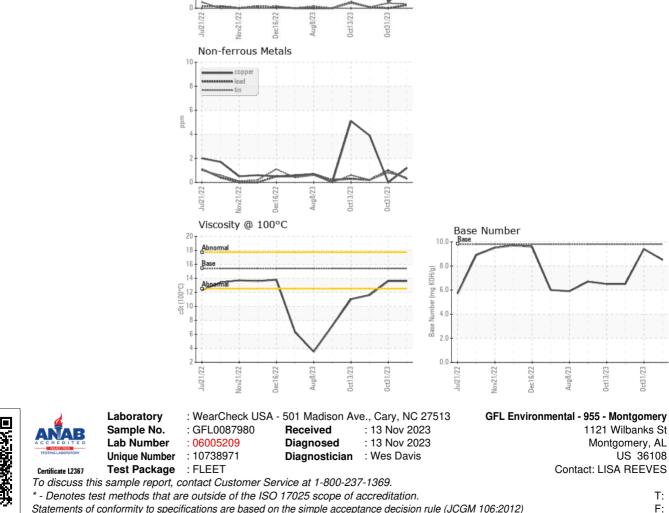

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Submitted By: Lisa Reeves Page 2 of 2