

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



707204 Component

Diesel Engine

PETRO CANADA DURON SHP 10W30 (--- 0

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Metal levels are typical for a components first oil change.

Contamination

There is no indication of any contamination in the


Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION method limit/base current history1 history2							
Sample Number Client Info PCA0112249	rts)				Nov2023		
Contact Collect Info	SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Machine Age mls Client Info 284030	Sample Number		Client Info		PCA0112249		
Coli Age	Sample Date		Client Info		01 Nov 2023		
Contamped Client Info Normal Changed Contamped Contamp	Machine Age	mls	Client Info		284030		
CONTAMINATION method limit/base current history1 history2	Oil Age	mls	Client Info		284030		
CONTAMINATION method limit/base current history1 history2 Fuel WC Method >5 <1.0	Oil Changed		Client Info		Changed		
Fuel	Sample Status				NORMAL		
Fuel	CONTAMINAT	ION	method	limit/base	current	history1	history2
WEAR METALS	Fuel		WC Method	>5	<1.0		
Chromium	Glycol		WC Method				
Chromium	WEAR METAL	S	method	limit/base	current	history1	history2
ASTM D5185m >20	ron	maa	ASTM D5185m	>100	41		
Nickel	Chromium		ASTM D5185m	>20	1		
ASTM D5185m Compared to the part of th	Nickel				-		
Silver	Titanium				<1		
Ast Ast	Silver		ASTM D5185m	>3	0		
Lead	Aluminum		ASTM D5185m	>20	9		
Copper	Lead		ASTM D5185m	>40	1		
Standard	Copper		ASTM D5185m	>330	4		
Vanadium ppm ASTM D5185m 0 Cadmium ppm ASTM D5185m 0 ADDITIVES method limit/base current history1 history2 Barium ppm ASTM D5185m 2 16 Barium ppm ASTM D5185m 0 0 Molybdenum ppm ASTM D5185m 0 60 Manganese ppm ASTM D5185m 0 <1 Magnesium ppm ASTM D5185m 950 949 Calcicium ppm ASTM D5185m 995 1180 Phosphorus ppm ASTM D5185m 995 1180 Zinc ppm ASTM D5185m 2600 3269 CONTAMINANTS method limit/base current history1	• •		ASTM D5185m	>15	<1		
ADDITIVES	Vanadium		ASTM D5185m		0		
Barium	Cadmium		ASTM D5185m		0		
Barium	ADDITIVES		method	limit/base	current	history1	history2
Molybdenum ppm ASTM D5185m 50 60 Manganese ppm ASTM D5185m 0 <1	Boron	ppm	ASTM D5185m	2	16		
Manganese ppm ASTM D5185m 0 <1 Magnesium ppm ASTM D5185m 950 949 Calcium ppm ASTM D5185m 1050 1129 Phosphorus ppm ASTM D5185m 995 1180 Zinc ppm ASTM D5185m 2600 3269 Sulfur ppm ASTM D5185m 2600 3269 CONTAMINANTS method limit/base current history1 history2 Solicon ppm ASTM D5185m >25 5 Solicon ppm ASTM D5185m >20 5 Potassium ppm ASTM D5185m >20 5 INFRA-RED method limit/base current history1 history2 Soot % % *ASTM D7844	Barium	ppm	ASTM D5185m	0	0		
Magnesium ppm ASTM D5185m 950 949 Calcium ppm ASTM D5185m 1050 1129 Phosphorus ppm ASTM D5185m 995 1180 Zinc ppm ASTM D5185m 1180 1350 Sulfur ppm ASTM D5185m 2600 3269 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185m >25 5 Sodium ppm ASTM D5185m >20 5 Potassium ppm ASTM D5185m >20 5 INFRA-RED method limit/base current history1 history2 Soot % % *ASTM D7624 >20 10.8 Sulfation Abs/.1mm *ASTM D7414 <td>Molybdenum</td> <td>ppm</td> <td>ASTM D5185m</td> <td>50</td> <td>60</td> <td></td> <td></td>	Molybdenum	ppm	ASTM D5185m	50	60		
Calcium ppm ASTM D5185m 1050 1129 Phosphorus ppm ASTM D5185m 995 1180 Zinc ppm ASTM D5185m 1180 1350 Sulfur ppm ASTM D5185m 2600 3269 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185m >25 5 Sodium ppm ASTM D5185m >20 5 Potassium ppm ASTM D5185m >20 5 INFRA-RED method limit/base current history1 history2 Soot % % *ASTM D7844 >3 0.9 Sulfation Abs/.1mm *ASTM D7415 >30 24.7 FLUID DEGRADATION method limi	Manganese	ppm	ASTM D5185m	0	<1		
Phosphorus ppm ASTM D5185m 995 1180 Zinc ppm ASTM D5185m 1180 1350 Sulfur ppm ASTM D5185m 2600 3269 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185m >25 5 Sodium ppm ASTM D5185m >20 5 Potassium ppm ASTM D5185m >20 5 INFRA-RED method limit/base current history1 history2 Soot % % *ASTM D7844 >3 0.9 Nitration Abs/cm *ASTM D7624 >20 10.8 Sulfation Abs/.1mm *ASTM D7415 >30 24.7 FLUID DEGRADATION method	Magnesium	ppm	ASTM D5185m	950	949		
Zinc ppm ASTM D5185m 1180 1350 Sulfur ppm ASTM D5185m 2600 3269 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185m >25 5 Sodium ppm ASTM D5185m <1 Potassium ppm ASTM D5185m >20 5 INFRA-RED method limit/base current history1 history2 Soot % *ASTM D7844 >3 0.9 Nitration Abs/cm *ASTM D7624 >20 10.8 Sulfation Abs/.1mm *ASTM D7415 >30 24.7 FLUID DEGRADATION method limit/base current history1 history2 Dxidation Abs/.1mm *ASTM D7414 >25 21.4	Calcium	ppm	ASTM D5185m	1050	1129		
Sulfur ppm ASTM D5185m 2600 3269 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185m >25 5 Sodium ppm ASTM D5185m >20 5 Potassium ppm ASTM D5185m >20 5 INFRA-RED method limit/base current history1 history2 Soot % % *ASTM D7844 >3 0.9 Nitration Abs/cm *ASTM D7624 >20 10.8 Sulfation Abs/.1mm *ASTM D7415 >30 24.7 FLUID DEGRADATION method limit/base current history1 history2 Oxidation Abs/.1mm *ASTM D7414 >25 21.4	Phosphorus	ppm	ASTM D5185m	995	1180		
CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185m >25 5 Sodium ppm ASTM D5185m <1	Zinc	ppm	ASTM D5185m	1180	1350		
Solition ppm ASTM D5185m >25 5	Sulfur	ppm	ASTM D5185m	2600	3269		
Sodium	CONTAMINAN	ITS	method	limit/base	current	history1	history2
Potassium ppm ASTM D5185m >20 5 INFRA-RED method limit/base current history1 history2 Soot % % *ASTM D7844 >3 0.9 Nitration Abs/cm *ASTM D7624 >20 10.8 Sulfation Abs/.1mm *ASTM D7415 >30 24.7 FLUID DEGRADATION method limit/base current history1 history2 Oxidation Abs/.1mm *ASTM D7414 >25 21.4	Silicon	ppm	ASTM D5185m	>25	5		
INFRA-RED	Sodium	ppm	ASTM D5185m		<1		
Soot %	Potassium	ppm	ASTM D5185m	>20	5		
Nitration Abs/cm *ASTM D7624 >20 10.8 Sulfation Abs/.1mm *ASTM D7415 >30 24.7 FLUID DEGRADATION method limit/base current history1 history2 Oxidation Abs/.1mm *ASTM D7414 >25 21.4	INFRA-RED		method	limit/base	current	history1	history2
Sulfation Abs/.1mm *ASTM D7415 >30 24.7 FLUID DEGRADATION method limit/base current history1 history2 Oxidation Abs/.1mm *ASTM D7414 >25 21.4	Soot %	%	*ASTM D7844	>3	0.9		
Sulfation Abs/.1mm *ASTM D7415 >30 24.7 FLUID DEGRADATION method limit/base current history1 history2 Oxidation Abs/.1mm *ASTM D7414 >25 21.4	Vitration	Abs/cm	*ASTM D7624	>20	10.8		
Oxidation	Sulfation		*ASTM D7415	>30	24.7		
	FLUID DEGRAI	OITAC	method	limit/base	current	history1	history2
	Oxidation	Abs/.1mm	*ASTM D7414	>25	21.4		
	Base Number (BN)	mg KOH/g	ASTM D2896		5.7		



OIL ANALYSIS REPORT

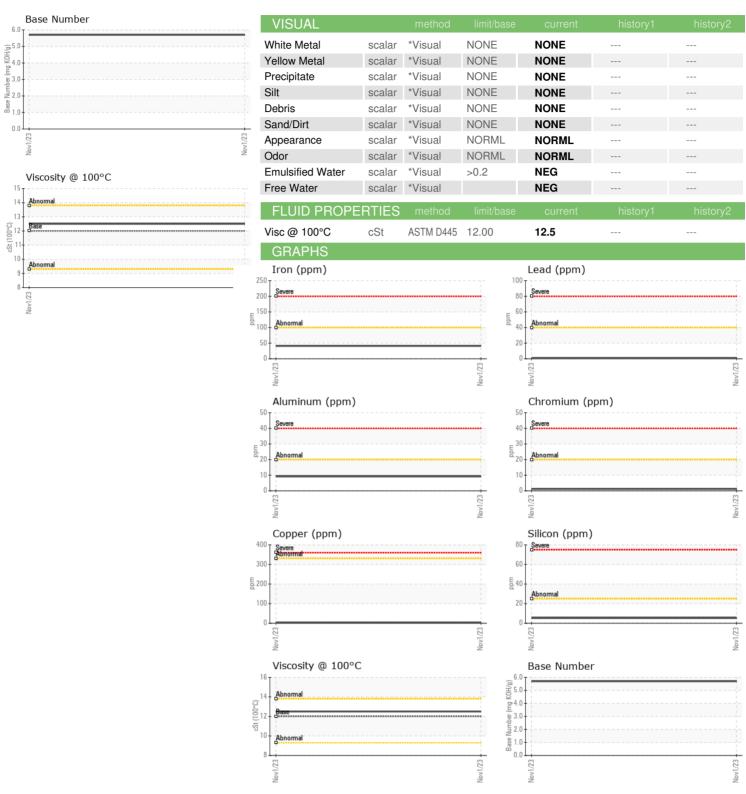





Certificate L2367

Laboratory Lab Number

Sample No. **Unique Number**

: 06005322 : 10739084

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 13 Nov 2023 : PCA0112249 Diagnosed : 14 Nov 2023

Diagnostician : Wes Davis Test Package : MOB 1 (Additional Tests: TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

MILLER TRUCK LEASING #118

2196 BENNETT ROAD PHILADELPHIA, PA US 19116

Contact: ROSTY VITER rviter@millertransgroup.com T: (215)552-9832

Contact/Location: ROSTY VITER - MILPHINE

F: (215)552-9892