


PROBLEM SUMMARY


PASTA [98543551] Machine Id B PRESS VACUUM ROTOMISSION

Component **Gearbox**

GEAR OIL ISO 150 (--- GAL)

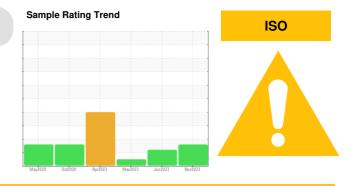

COMPONENT CONDITION SUMMARY

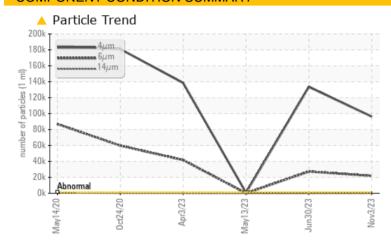

RECOMMENDATION

The oil change at the time of sampling has been noted. We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

PROBLEMATIC TE	ST RESULT	S			
Sample Status			ABNORMAL	ABNORMAL	NORMAL
Particles >4µm	ASTM D7647	>1300	△ 96230	<u>▲</u> 133519	669
Particles >6µm	ASTM D7647	>320	21798	▲ 27323	132
Particles >14μm	ASTM D7647	>80	104	62	13
Oil Cleanliness	ISO 4406 (c)	>17/15/13	24/22/14	A 24/22/13	17/14/11

Customer Id: KRASPRMO Sample No.: PCA0096874 Lab Number: 06005542 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:

Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter			?	We recommend you service the filters on this component if applicable.

HISTORICAL DIAGNOSIS

30 Jun 2023 Diag: Don Baldridge

ISO



The oil change at the time of sampling has been noted. We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



13 May 2023 Diag: Don Baldridge

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



03 Apr 2023 Diag: Doug Bogart

ISO



The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.






OIL ANALYSIS REPORT

PASTA [98543551] **B PRESS VACUUM ROTOMISSION**

Component

Gearbox

GEAR OIL ISO 150 (--- GAL)





DIAGNOSIS

Recommendation

The oil change at the time of sampling has been noted. We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		May2020	Oct2020 Apr2023	May2023 Jun2023	Nov2023	
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0096874	PCA0099599	PCA0096813
Sample Date		Client Info		03 Nov 2023	30 Jun 2023	13 May 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Sample Status				ABNORMAL	ABNORMAL	NORMAL
WEAR METAL	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	4	6	<1
Chromium	ppm	ASTM D5185m	>15	0	0	<1
Nickel	ppm	ASTM D5185m	>15	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>25	0	<1	<1
Lead	ppm	ASTM D5185m	>100	0	<1	<1
Copper	ppm	ASTM D5185m	>200	0	0	0
Tin	ppm	ASTM D5185m	>25	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	50	0	0	0
Barium	ppm	ASTM D5185m	15	0	0	0
Molybdenum	ppm	ASTM D5185m	15	0	0	<1
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m	50	0	0	10
Calcium	ppm	ASTM D5185m	50	0	0	0
Phosphorus	ppm	ASTM D5185m	350	71	105	117
Zinc	ppm	ASTM D5185m	100	0	0	7
Sulfur	ppm	ASTM D5185m	12500	0	0	0
CONTAMINAN	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	1	1	2
Sodium	ppm	ASTM D5185m		0	0	<1
Potassium	ppm	ASTM D5185m	>20	1	0	1
FLUID CLEANL	INESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>1300	△ 96230	△ 133519	669
Particles >6µm		ASTM D7647	>320	<u> </u>	<u>▲</u> 27323	132
Particles >14μm		ASTM D7647	>80	<u> </u>	62	13
Particles >21µm		ASTM D7647	>20	12	7	4
Particles >38μm		ASTM D7647	>4	0	0	1
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>17/15/13	<u>4</u> 24/22/14	<u>4</u> 24/22/13	17/14/11
FLUID DEGRAD	OATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.85	0.33	0.40	0.36



OIL ANALYSIS REPORT

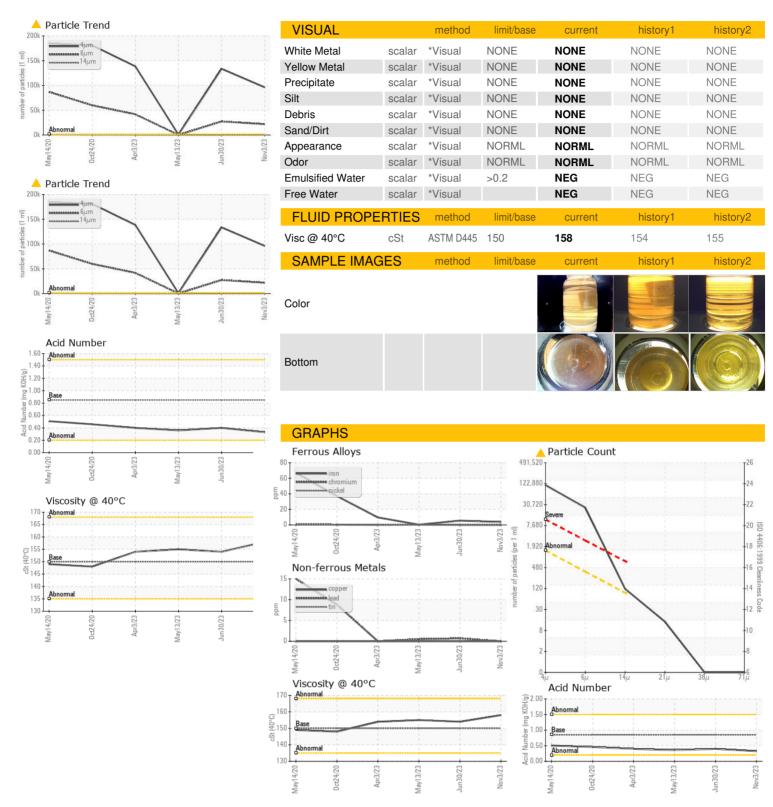





Certificate L2367

Laboratory Sample No. Lab Number **Unique Number**

: PCA0096874

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : 06005542 : 10739304

Received Diagnosed Diagnostician Test Package : IND 2 (Additional Tests: PrtCount)

: 13 Nov 2023 : 15 Nov 2023 : Don Baldridge

SPRINGFIELD, MO

US 65804 Contact: Service Manager

2035 E BENNETT

KraftHeinz - Springfield - Plant 8311 PCA

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: F: