


# OIL ANALYSIS REPORT



Area  
**KEMP QUARRIES / HULBERT**  
Machine Id  
**ENG039**  
Component  
**Diesel Engine**  
Fluid  
**DIESEL ENGINE OIL SAE 40 (--- GAL)**

## Sample Rating Trend

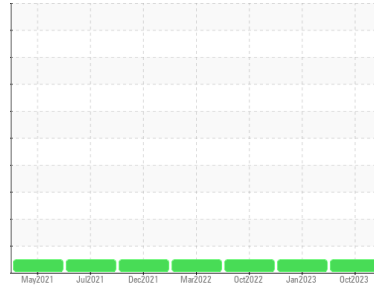

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0086817</b>	PCA0086162	PCA0061879
Sample Date	Client Info		<b>28 Oct 2023</b>	16 Jan 2023	08 Oct 2022
Machine Age	hrs	Client Info	<b>35021</b>	33343	32819
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>6</b>	6	8
Chromium	ppm	ASTM D5185m >20	<b>0</b>	<1	0
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>&lt;1</b>	1	0
Lead	ppm	ASTM D5185m >40	<b>1</b>	1	1
Copper	ppm	ASTM D5185m >330	<b>8</b>	3	3
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	<b>0</b>	<1	2
Barium	ppm	ASTM D5185m 10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 100	<b>58</b>	61	60
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m 450	<b>943</b>	922	985
Calcium	ppm	ASTM D5185m 3000	<b>1022</b>	1088	1119
Phosphorus	ppm	ASTM D5185m 1150	<b>1004</b>	1019	1026
Zinc	ppm	ASTM D5185m 1350	<b>1268</b>	1233	1317
Sulfur	ppm	ASTM D5185m 4250	<b>3021</b>	3118	3602

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>2</b>	3	2
Sodium	ppm	ASTM D5185m >216	<b>&lt;1</b>	<1	<1
Potassium	ppm	ASTM D5185m >20	<b>1</b>	0	0



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.3</b>	0.3	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.2</b>	6.4	7.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.9</b>	18.4	20.2

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>14.0</b>	13.9	15.3
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	<b>8.9</b>	9.1	10.3









# OIL ANALYSIS REPORT

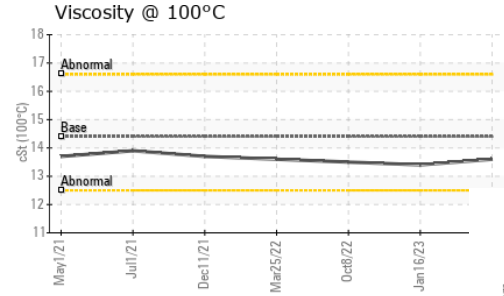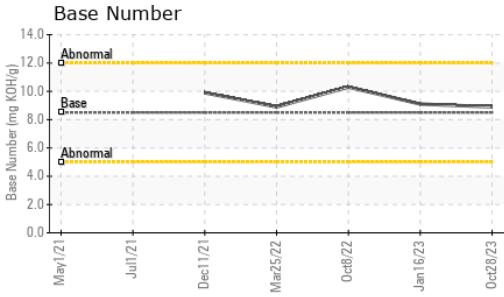

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.6</b>	13.4	13.5

## GRAPHS

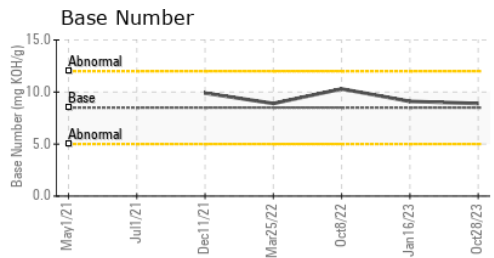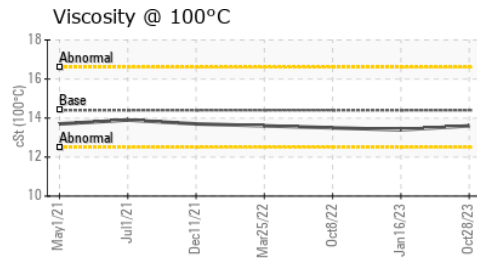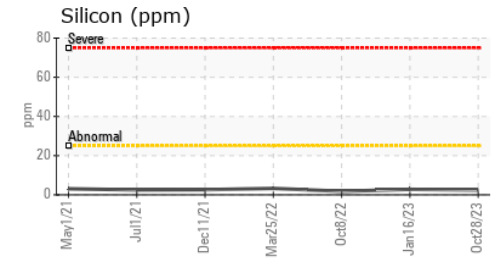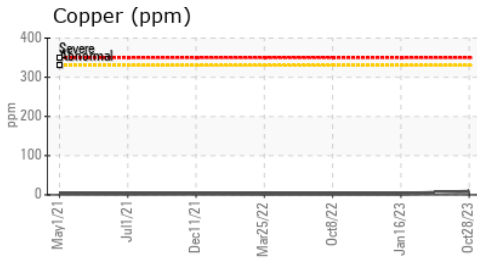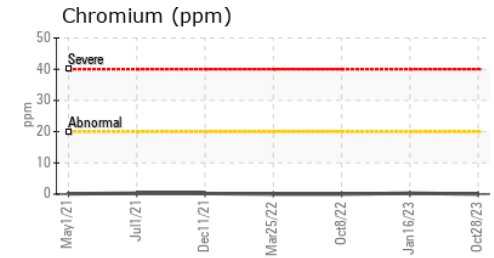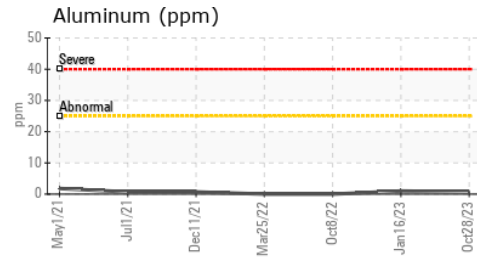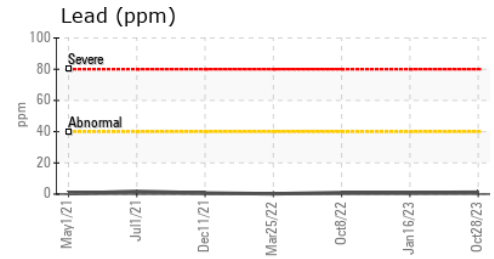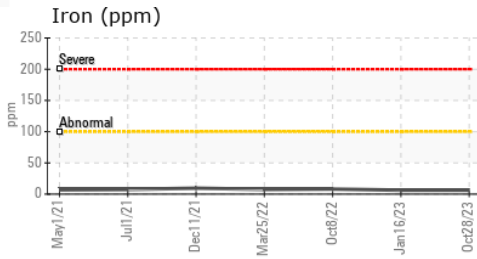

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0086817 **Received** : 13 Nov 2023  
**Lab Number** : 06006068 **Diagnosed** : 14 Nov 2023  
**Unique Number** : 10739830 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**Kemp Quarries - Kemp Stone - Hulbert**  
 17801 Hwy 80  
 Hulbert, OK  
 US 74441  
 Contact: HULBERT NOTIFICATIONS  
 hulbert@kempstone.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: