


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

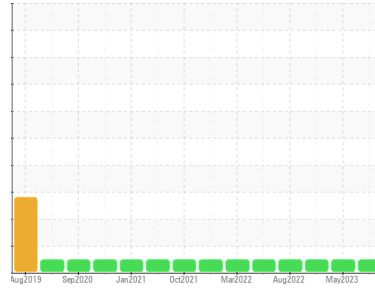

Machine Id  
**1926698**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (40 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0108209</b>	PCA0093689	PCA0085257
Sample Date	Client Info		<b>09 Nov 2023</b>	04 May 2023	19 Jan 2023
Machine Age	mls	Client Info	<b>469327</b>	428436	402753
Oil Age	mls	Client Info	<b>40607</b>	25683	53155
Oil Changed	Client Info		<b>Changed</b>	Not Changd	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>6.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>48</b>	23	44
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	1	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	0
Aluminum	ppm	ASTM D5185m >25	<b>2</b>	4	2
Lead	ppm	ASTM D5185m >40	<b>1</b>	2	1
Copper	ppm	ASTM D5185m >330	<b>8</b>	6	10
Tin	ppm	ASTM D5185m >15	<b>1</b>	2	2
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>0</b>	2	0
Barium	ppm	ASTM D5185m 0	<b>6</b>	0	0
Molybdenum	ppm	ASTM D5185m 50	<b>61</b>	59	60
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 950	<b>880</b>	967	869
Calcium	ppm	ASTM D5185m 1050	<b>1073</b>	1089	1099
Phosphorus	ppm	ASTM D5185m 995	<b>951</b>	1004	923
Zinc	ppm	ASTM D5185m 1180	<b>1163</b>	1289	1173
Sulfur	ppm	ASTM D5185m 2600	<b>3013</b>	3472	2518

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>6</b>	4	6
Sodium	ppm	ASTM D5185m	<b>11</b>	12	13
Potassium	ppm	ASTM D5185m >20	<b>4</b>	3	5



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.8</b>	0.4	0.9
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.9</b>	10.0	12.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>24.4</b>	22.1	24.5

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>21.0</b>	18.9	20.6
Base Number (BN)	mg KOH/g	ASTM D2896	<b>4.3</b>	5.5	4.9





# OIL ANALYSIS REPORT

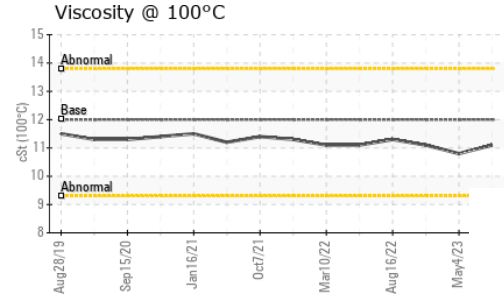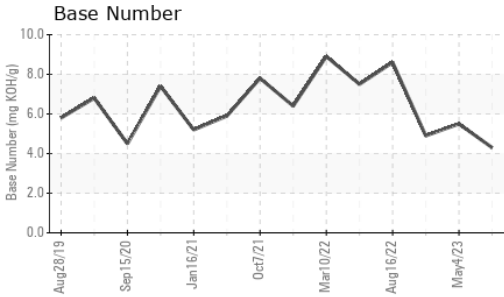

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.1</b>	10.8	11.1

## GRAPHS

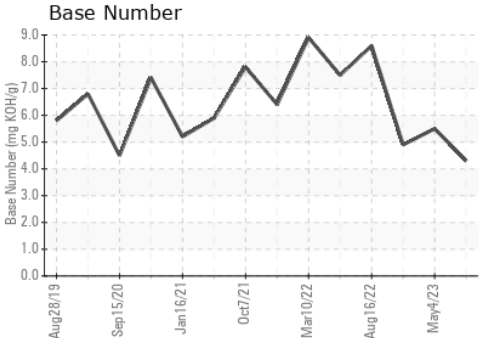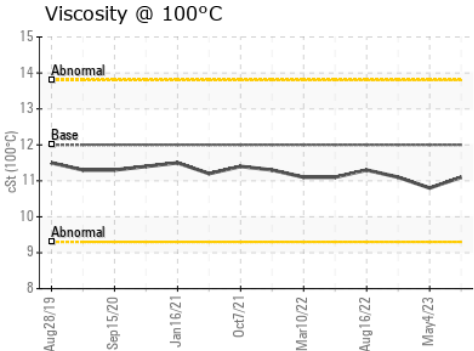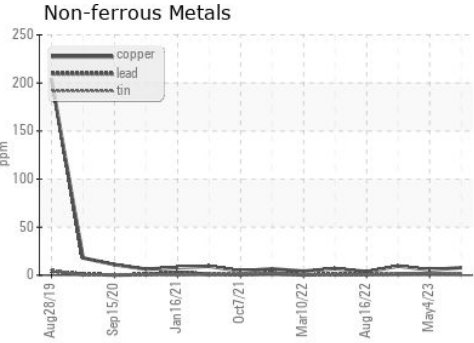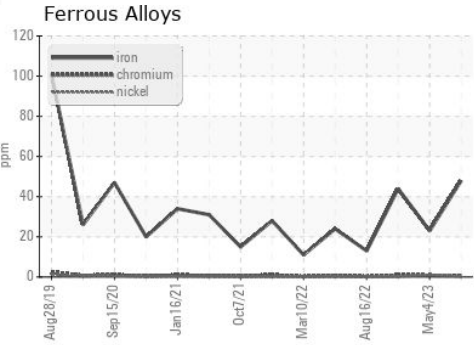

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0108209 **Received** : 14 Nov 2023  
**Lab Number** : **06006728** **Diagnosed** : 14 Nov 2023  
**Unique Number** : 10740490 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**PERDUE FARMS - ACCOMAC**  
 22520 LANKFORD HWY  
 ACCOMAC, VA  
 US 23301  
 Contact: PEGGY KIMES  
 peggy.kimes@perdue.com  
 T: (757)787-5304  
 F: (757)787-5208

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)