


Area
KEMP QUARRIES / RIVER VALLEY ARKOMA
Machine Id
OHT102
Component
Middle Left Final Drive
Fluid
MOBIL MOBILUBE HD 80W90 (--- GAL)

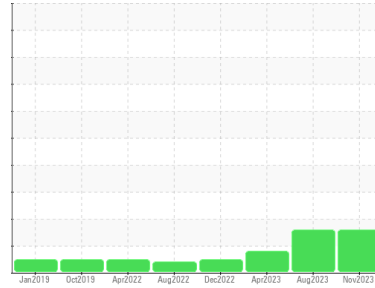

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

Additive levels indicate the addition of a different brand, or type of oil. Confirm oil type. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0084214	PCA0084285	PCA0070414
Sample Date	Client Info		06 Nov 2023	22 Aug 2023	20 Apr 2023
Machine Age	hrs	Client Info	29340	29115	28531
Oil Age	hrs	Client Info	29115	28531	28531
Oil Changed	Client Info		Not Chngd	Changed	Changed
Sample Status			ATTENTION	ATTENTION	ABNORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	15	10	272
Chromium	ppm	ASTM D5185m >10	<1	0	2
Nickel	ppm	ASTM D5185m >10	<1	0	<1
Titanium	ppm	ASTM D5185m	<1	<1	<1
Silver	ppm	ASTM D5185m	<1	0	0
Aluminum	ppm	ASTM D5185m >25	2	<1	0
Lead	ppm	ASTM D5185m >25	0	<1	0
Copper	ppm	ASTM D5185m >50	16	10	▲ 89
Tin	ppm	ASTM D5185m >10	<1	<1	3
Vanadium	ppm	ASTM D5185m	<1	<1	0
Cadmium	ppm	ASTM D5185m	<1	<1	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	86	▲ 54	217
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	2	<1	14
Manganese	ppm	ASTM D5185m	<1	<1	2
Magnesium	ppm	ASTM D5185m	16	2	2
Calcium	ppm	ASTM D5185m	▲ 5191	▲ 2920	18
Phosphorus	ppm	ASTM D5185m	▲ 1449	776	1015
Zinc	ppm	ASTM D5185m	▲ 1632	▲ 890	19
Sulfur	ppm	ASTM D5185m	▲ 8332	▲ 5557	20637

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >75	23	17	9
Sodium	ppm	ASTM D5185m	0	<1	<1
Potassium	ppm	ASTM D5185m >20	4	1	<1

VISUAL


	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual NONE	NONE	NONE	MODER
Precipitate	scalar	*Visual NONE	NONE	NONE	NONE
Silt	scalar	*Visual NONE	NONE	NONE	NONE
Debris	scalar	*Visual NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual NONE	NONE	NONE	NONE
Appearance	scalar	*Visual NORML	NORML	NORML	NORML
Odor	scalar	*Visual NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual >0.2	NEG	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG

FLUID PROPERTIES

	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 136	190	190	138

OIL ANALYSIS REPORT

▲ Additives

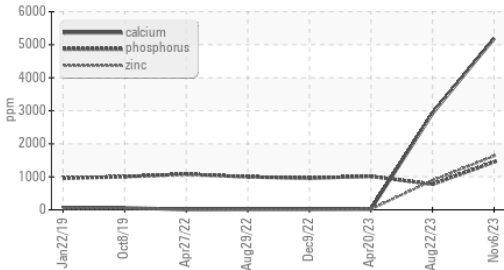

SAMPLE IMAGES method limit/base current history1 history2


Color

Bottom


no image	no image	no image
no image	no image	no image

GRAPHS


Viscosity @ 40°C

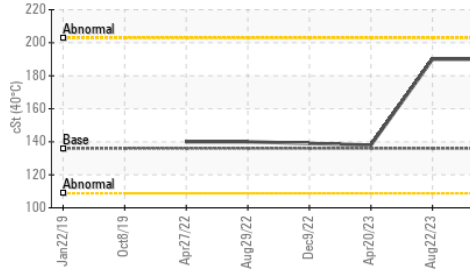


Iron (ppm)

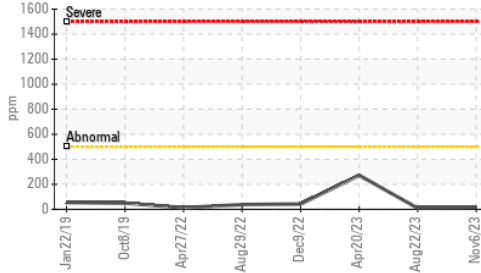


Lead (ppm)

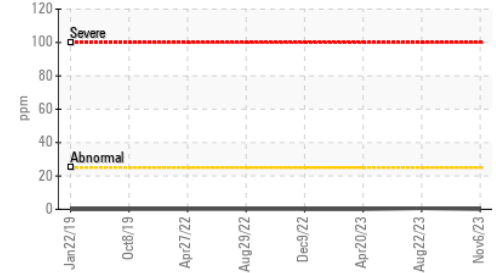


Aluminum (ppm)

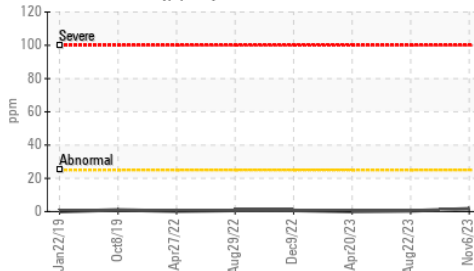


Chromium (ppm)

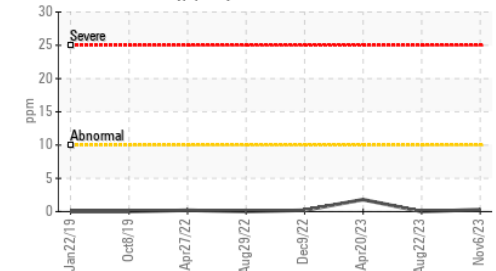


Copper (ppm)

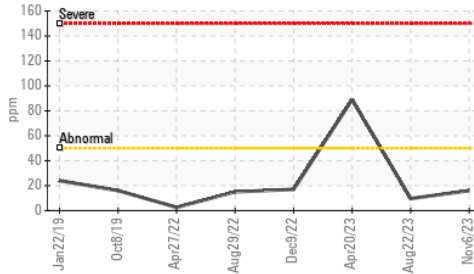


Silicon (ppm)

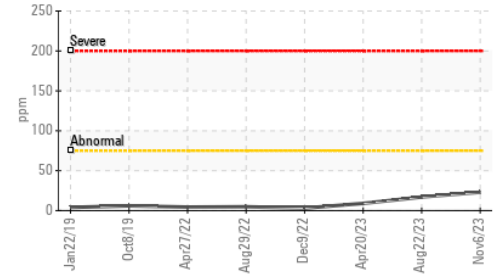

Viscosity @ 40°C

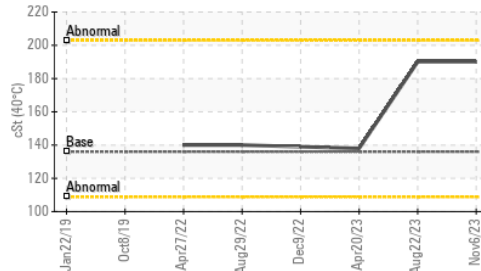

▲ Additives

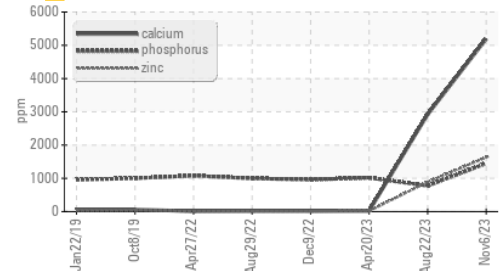

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0084214 **Received** : 14 Nov 2023
Lab Number : 06007916 **Diagnosed** : 16 Nov 2023
Unique Number : 10741678 **Diagnostician** : Don Baldrige
Test Package : MOB 1

Kemp Quarries - River Valley - Arkoma
 12971 HWY 9a
 Shawnee, OK
 US 74804
 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

arkomashop@kempquarries.net

T:
F: