






PROBLEM SUMMARY

Area
(GD87840) S0916A-Suamico
 Machine Id
10920
 Component
Front Center Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (34 QTS)

Sample Rating Trend

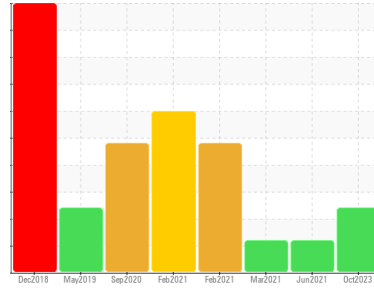

COMPONENT CONDITION SUMMARY

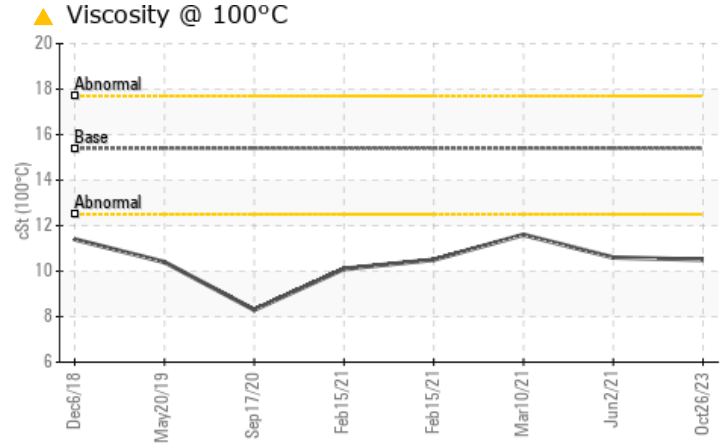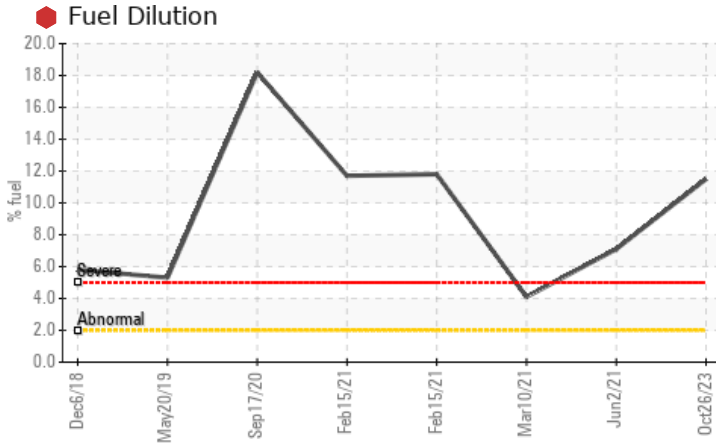

RECOMMENDATION

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	ABNORMAL	ABNORMAL
Fuel	%	ASTM D3524	>2.0	11.5	7.1	4.1
Visc @ 100°C	cSt	ASTM D445	15.4	10.5	10.6	11.6

Customer Id: GFL916A
 Sample No.: GFL0095971
 Lab Number: 06008017
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Wes Davis +1 905-569-8600 x223
wesd@wearcheck.ca

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Fuel/injector System	---	---	?	We advise that you check the fuel injection system.

HISTORICAL DIAGNOSIS

02 Jun 2021 Diag: Jonathan Hester

FUEL



We advise that you check the fuel injection system. Resample at the next service interval to monitor. All component wear rates are normal. There is a moderate amount of fuel present in the oil. Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil.

[view report](#)



10 Mar 2021 Diag: Don Baldrige

FUEL



We advise that you check the fuel injection system. Resample at the next service interval to monitor. All component wear rates are normal. There is a moderate amount of fuel present in the oil. Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil.

[view report](#)



15 Feb 2021 Diag: Jonathan Hester

FUEL



We advise that you check the fuel injection system. We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a high amount of fuel present in the oil. Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress. Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.


[view report](#)





OIL ANALYSIS REPORT

Sample Rating Trend

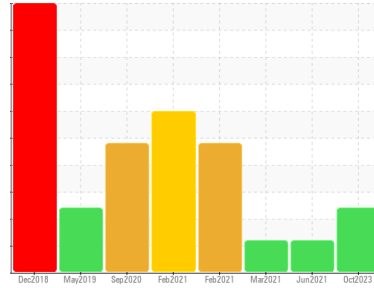

FUEL



Area
(GD87840) S0916A-Suamico
Machine Id
10920
Component
Front Center Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (34 QTS)

DIAGNOSIS

Recommendation

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0095971	GFL0023152	GFL0019956
Sample Date	Client Info	26 Oct 2023	02 Jun 2021	10 Mar 2021
Machine Age	hrs	32631	32631	3233
Oil Age	hrs	128	0	0
Oil Changed	Client Info	Changed	N/A	N/A
Sample Status		SEVERE	ABNORMAL	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >100	4	33	23
Chromium	ppm	ASTM D5185m >20	<1	1	1
Nickel	ppm	ASTM D5185m >4	0	0	<1
Titanium	ppm	ASTM D5185m	<1	2	2
Silver	ppm	ASTM D5185m >3	<1	0	0
Aluminum	ppm	ASTM D5185m >20	2	4	5
Lead	ppm	ASTM D5185m >40	<1	1	0
Copper	ppm	ASTM D5185m >330	<1	2	1
Tin	ppm	ASTM D5185m >15	0	<1	0
Antimony	ppm	ASTM D5185m	---	0	1
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	<1	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 0	8	19	13
Barium	ppm	ASTM D5185m 0	0	0	<1
Molybdenum	ppm	ASTM D5185m 60	53	58	48
Manganese	ppm	ASTM D5185m 0	0	<1	<1
Magnesium	ppm	ASTM D5185m 1010	776	821	784
Calcium	ppm	ASTM D5185m 1070	953	1049	919
Phosphorus	ppm	ASTM D5185m 1150	883	941	862
Zinc	ppm	ASTM D5185m 1270	1039	1107	959
Sulfur	ppm	ASTM D5185m 2060	2676	2404	2139

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	5	10	9
Sodium	ppm	ASTM D5185m	0	6	2
Potassium	ppm	ASTM D5185m >20	2	4	0
Fuel	%	ASTM D3524 >2.0	11.5	7.1	4.1

INFRA-RED




method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >3	0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624 >20	6.7	9.6	7.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	17.8	21.4	20.6

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	14.0	19.9	17.7
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	8.3	7.5	7.7







OIL ANALYSIS REPORT

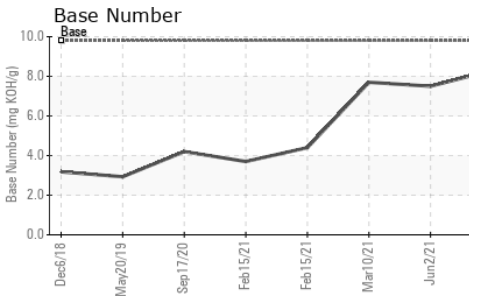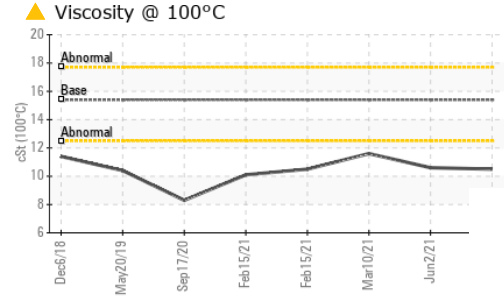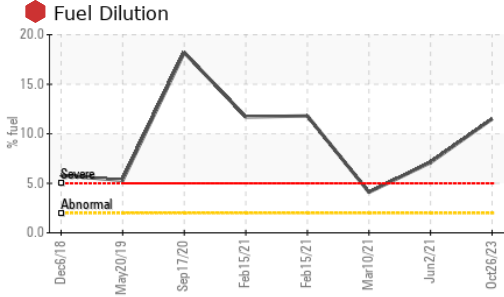

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 10.5	▲ 10.6

GRAPHS

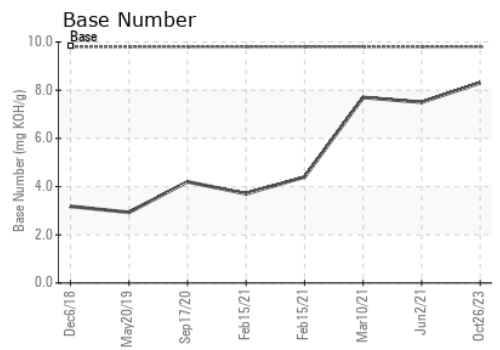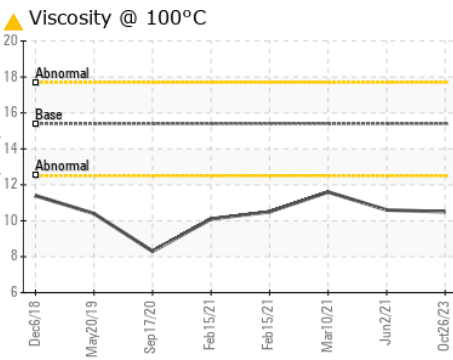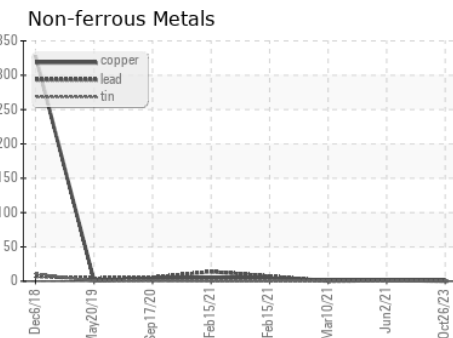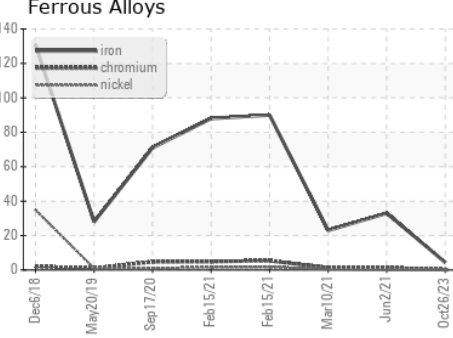

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0095971 **Received** : 15 Nov 2023
Lab Number : 06008017 **Diagnosed** : 16 Nov 2023
Unique Number : 10741779 **Diagnostician** : Wes Davis
Test Package : FLEET (Additional Tests: PercentFuel)

GFL Environmental - 916A - Suamico
 2300 Deerfield Ave E
 Suamico, WI
 US 54313
 Contact: NICHOLAS WEIDNER
 nweidner@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)