




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

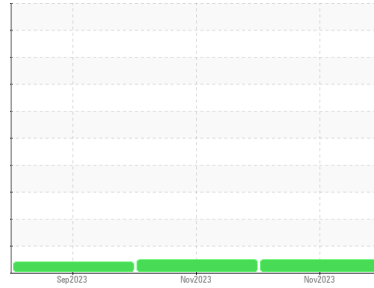

Machine Id
913149

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0101119	GFL0098461	GFL0083715
Sample Date	Client Info		08 Nov 2023	03 Nov 2023	21 Sep 2023
Machine Age	hrs	Client Info	600	0	0
Oil Age	hrs	Client Info	600	0	0
Oil Changed	Client Info		Changed	Not Changd	Not Changd
Sample Status			NORMAL	NORMAL	ATTENTION

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	0.3
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >110	63	64	56
Chromium	ppm	ASTM D5185m >4	<1	<1	<1
Nickel	ppm	ASTM D5185m >2	<1	<1	<1
Titanium	ppm	ASTM D5185m	<1	<1	<1
Silver	ppm	ASTM D5185m >2	<1	<1	0
Aluminum	ppm	ASTM D5185m >25	28	32	27
Lead	ppm	ASTM D5185m >45	<1	0	<1
Copper	ppm	ASTM D5185m >85	43	47	37
Tin	ppm	ASTM D5185m >4	<1	<1	<1
Vanadium	ppm	ASTM D5185m	<1	<1	<1
Cadmium	ppm	ASTM D5185m	<1	0	<1

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	18	20	37
Barium	ppm	ASTM D5185m 0	0	7	0
Molybdenum	ppm	ASTM D5185m 60	29	23	18
Manganese	ppm	ASTM D5185m 0	2	2	2
Magnesium	ppm	ASTM D5185m 1010	745	767	757
Calcium	ppm	ASTM D5185m 1070	1352	1355	1432
Phosphorus	ppm	ASTM D5185m 1150	800	806	723
Zinc	ppm	ASTM D5185m 1270	980	944	883
Sulfur	ppm	ASTM D5185m 2060	2734	3145	3450

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	10	12	13
Sodium	ppm	ASTM D5185m	1	4	4
Potassium	ppm	ASTM D5185m >20	83	93	75

INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.5	0.5	0.3
Nitration	Abs/cm	*ASTM D7624 >20	11.0	11.2	9.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	24.3	24.7	21.9

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	19.2	19.9	17.2
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	5.4	5.7	5.9







OIL ANALYSIS REPORT

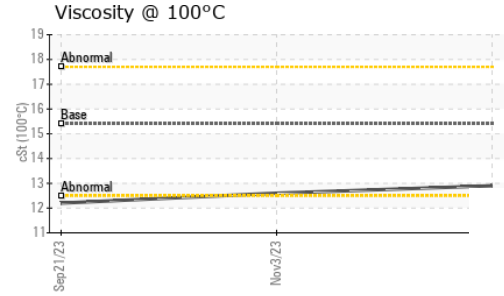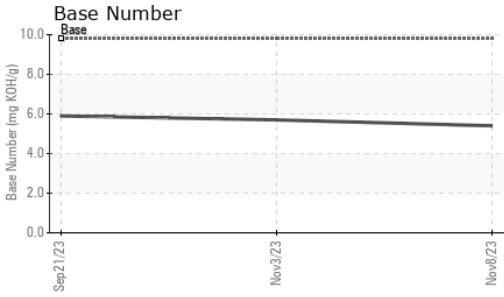

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	12.9	12.6 ▲ 12.2

GRAPHS

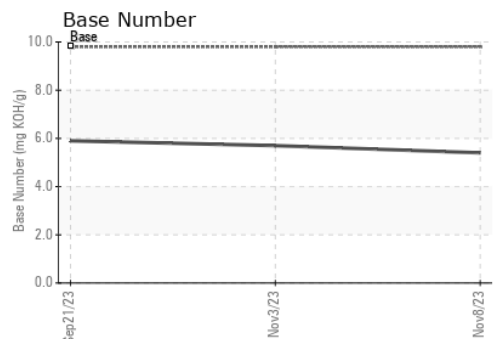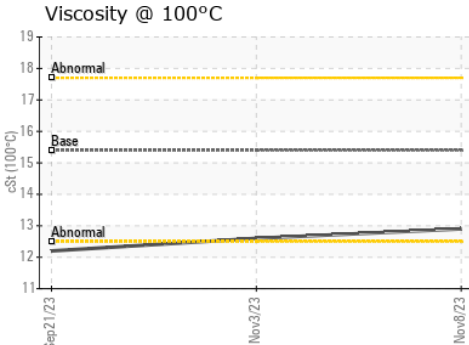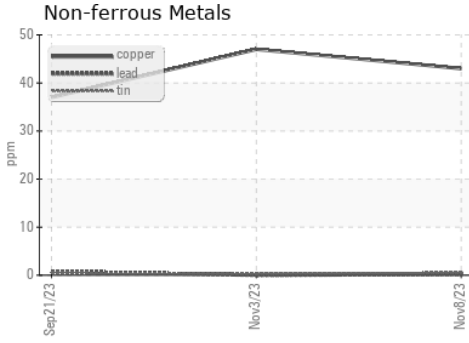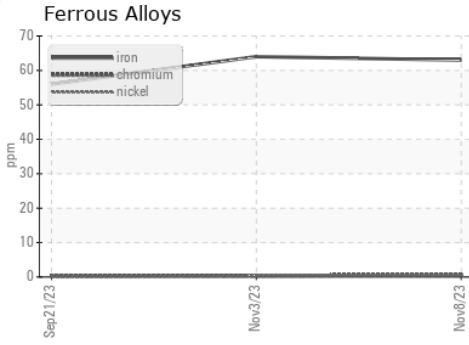

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0101119 **Received** : 15 Nov 2023
Lab Number : 06008030 **Diagnosed** : 15 Nov 2023
Unique Number : 10741792 **Diagnostician** : Wes Davis
Test Package : FLEET

GFL Environmental - 846 - Mayfield Hauling
 3426 State Route 45
 Mayfield, KY
 US 42066
 Contact: Jack Lindsey
 jack.lindsey@gflenv.com
 T: (270)970-3690
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)