




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

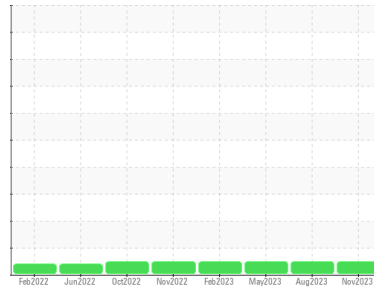

Machine Id  
**812036**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- Shots)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0100381</b>	GFL0080387	GFL0080396
Sample Date	Client Info	<b>13 Nov 2023</b>	29 Aug 2023	18 May 2023
Machine Age	hrs	<b>3832</b>	3400	2799
Oil Age	hrs	<b>600</b>	600	600
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >110	<b>8</b>	9	10
Chromium	ppm ASTM D5185m >4	<b>&lt;1</b>	0	<1
Nickel	ppm ASTM D5185m >2	<b>0</b>	0	<1
Titanium	ppm ASTM D5185m	<b>1</b>	1	<1
Silver	ppm ASTM D5185m >2	<b>&lt;1</b>	0	<1
Aluminum	ppm ASTM D5185m >25	<b>2</b>	4	6
Lead	ppm ASTM D5185m >45	<b>0</b>	0	0
Copper	ppm ASTM D5185m >85	<b>1</b>	2	0
Tin	ppm ASTM D5185m >4	<b>0</b>	0	<1
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	<1	<1
Cadmium	ppm ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>5</b>	<1	3
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>60</b>	59	59
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>932</b>	1028	1025
Calcium	ppm ASTM D5185m 1070	<b>1070</b>	1159	1146
Phosphorus	ppm ASTM D5185m 1150	<b>971</b>	942	1011
Zinc	ppm ASTM D5185m 1270	<b>1206</b>	1225	1297
Sulfur	ppm ASTM D5185m 2060	<b>2981</b>	3191	3576

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >30	<b>4</b>	13	16
Sodium	ppm ASTM D5185m	<b>0</b>	2	2
Potassium	ppm ASTM D5185m >20	<b>5</b>	3	6

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.3</b>	0.4	0.3
Nitration	Abs/cm *ASTM D7624 >20	<b>7.7</b>	8.6	8.1
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>19.9</b>	21.1	20.9

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>15.3</b>	17.1	16.8
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>7.7</b>	7.1	7.6







# OIL ANALYSIS REPORT

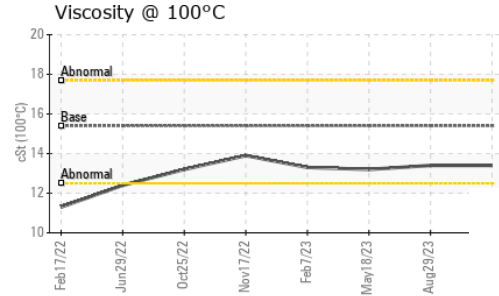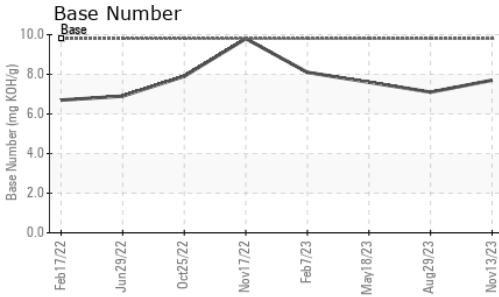

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.4</b>	13.4	13.2

## GRAPHS

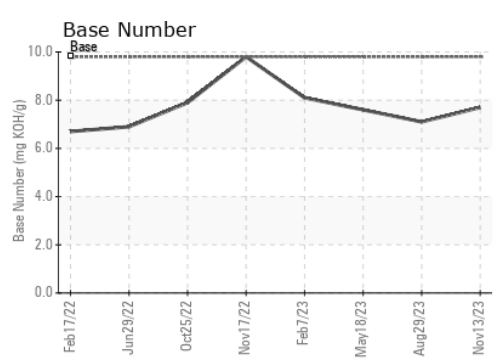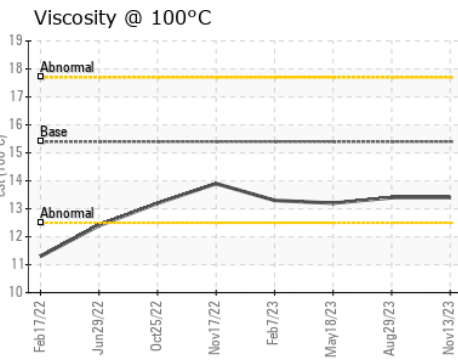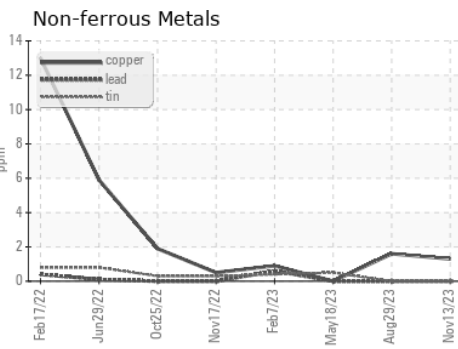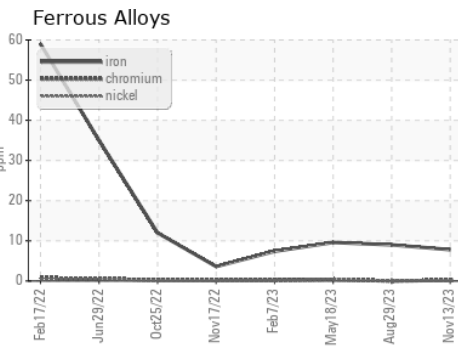

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0100381  
**Lab Number** : 06008069  
**Unique Number** : 10741831  
**Test Package** : FLEET

**GFL Environmental - 892 - Pauls Valley Hauling**  
 405 East Airport Industrial Road  
 Pauls Valley, OK  
 US 73075  
 Contact: Tony Graham  
 tgraham2@wcamerica.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)