


# OIL ANALYSIS REPORT

## Sample Rating Trend

**NORMAL**

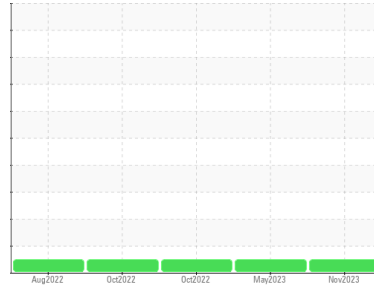

Area  
**(89648X) Walgreens - Tractor**  
Machine Id  
**[Walgreens - Tractor] 136A69069**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0111797</b>	PCA0097102	PCA0079942
Sample Date	Client Info		<b>03 Nov 2023</b>	05 May 2023	06 Oct 2022
Machine Age	mls	Client Info	<b>747435</b>	685117	626644
Oil Age	mls	Client Info	<b>62318</b>	60508	61337
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	<b>50</b>	32	7
Chromium	ppm	ASTM D5185m >5	<b>3</b>	2	<1
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m >30	<b>21</b>	13	3
Lead	ppm	ASTM D5185m >30	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185m >150	<b>6</b>	4	1
Tin	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>3</b>	3	11
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 50	<b>63</b>	67	65
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 950	<b>865</b>	970	898
Calcium	ppm	ASTM D5185m 1050	<b>1269</b>	1156	1132
Phosphorus	ppm	ASTM D5185m 995	<b>1002</b>	1016	1011
Zinc	ppm	ASTM D5185m 1180	<b>1229</b>	1288	1202
Sulfur	ppm	ASTM D5185m 2600	<b>2710</b>	3111	3715

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>7</b>	7	4
Sodium	ppm	ASTM D5185m	<b>0</b>	2	<1
Potassium	ppm	ASTM D5185m >20	<b>4</b>	2	1



### INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>1.5</b>	1.1	0.2
Nitration	Abs/cm	*ASTM D7624 >20	<b>11.6</b>	10.5	6.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>26.3</b>	24.2	19.5

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>21.3</b>	19.8	14.4
Base Number (BN)	mg KOH/g	ASTM D2896	<b>4.5</b>	5.2	9.4





# OIL ANALYSIS REPORT

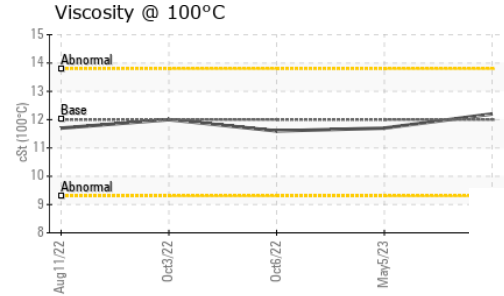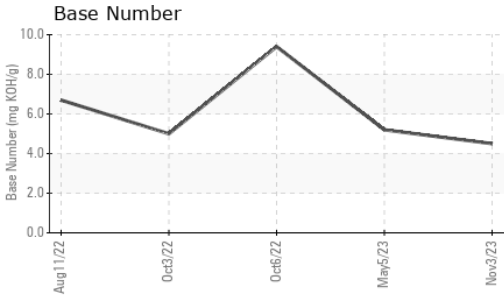

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

PARAMETER	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	12.2	11.7

## GRAPHS

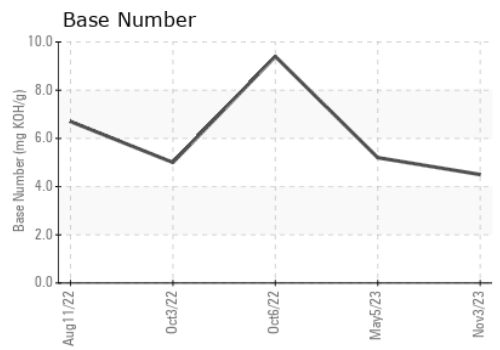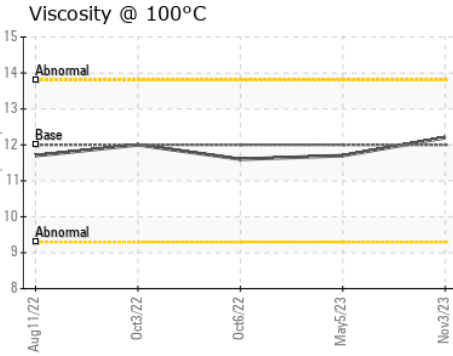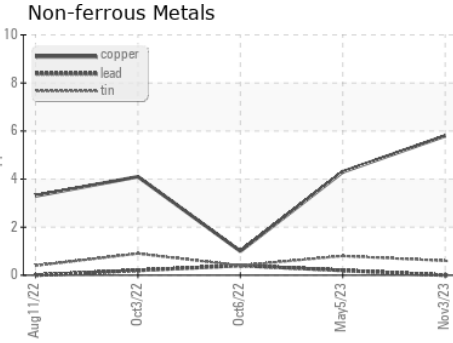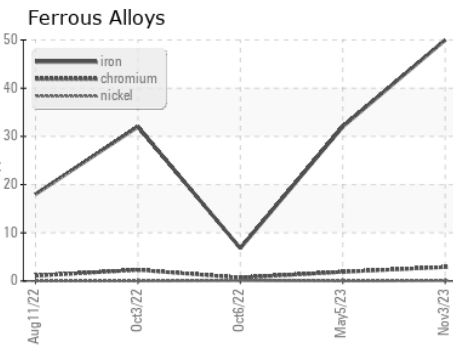

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0111797 **Received** : 15 Nov 2023  
**Lab Number** : 06008072 **Diagnosed** : 15 Nov 2023  
**Unique Number** : 10741834 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**Transervice - Shop 1373 - Berkeley-Anderson/Pendergrass**  
 101 Alliance Parkway  
 Willamston, SC  
 US 29697  
 Contact: Sonny Boucher  
 sboucher@transervice.com  
 T: (864)226-2304  
 F: (864)226-2329

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)