




PROBLEM SUMMARY



Machine Id
426131
 Component
Diesel Engine
 Fluid
NOT GIVEN (62 QTS)

Sample Rating Trend

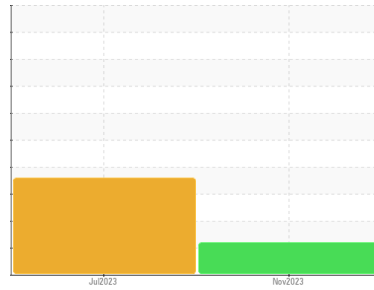


SOOT




COMPONENT CONDITION SUMMARY

▲ Viscosity @ 100°C

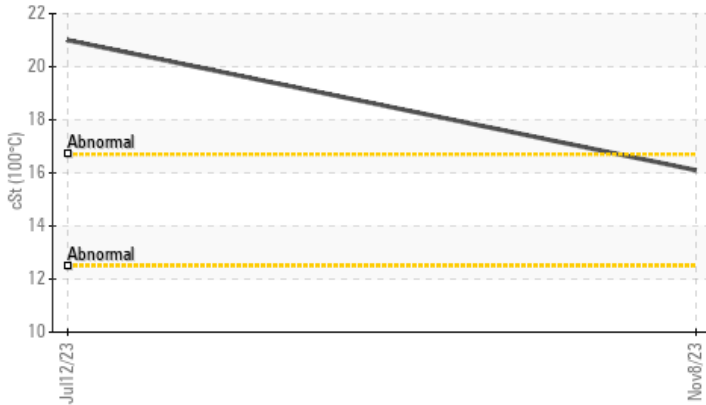

▲ Soot %

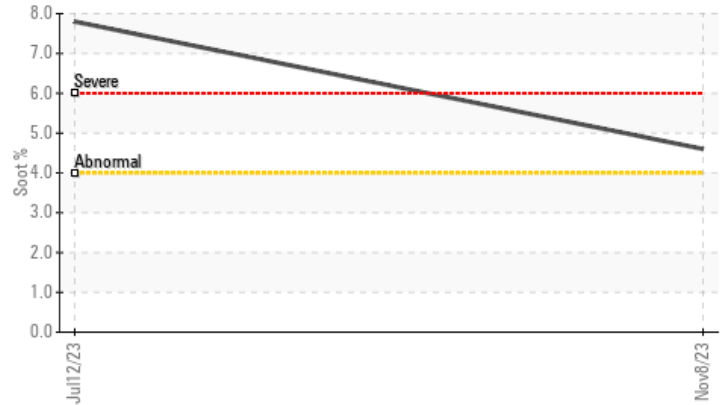

RECOMMENDATION

We advise that you check for faulty combustion, plugged air filters, or aftercoolers. We recommend you service the filters on this component. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status		ABNORMAL	SEVERE	---
Soot %	% *ASTM D7844 >4	▲ 4.6	● 7.8	---
Visc @ 100°C	cSt ASTM D445	▲ 16.1	▲ 21.0	---

Customer Id: GFL005
 Sample No.: GFL0092668
 Lab Number: 06008147
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component.
Check Combustion	---	---	?	We advise that you check for faulty combustion, plugged air filters, or aftercoolers.

HISTORICAL DIAGNOSIS

12 Jul 2023 Diag: Don Baldrige

SOOT



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

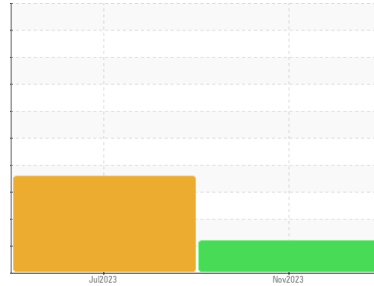

SOOT



Machine Id
426131
Component
Diesel Engine
Fluid
NOT GIVEN (62 QTS)

DIAGNOSIS

Recommendation

We advise that you check for faulty combustion, plugged air filters, or aftercoolers. We recommend you service the filters on this component. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is an abnormal amount of solids and carbon present in the oil.

Fluid Condition

The oil viscosity is higher than normal. The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0092668	GFL0072379	---
Sample Date	Client Info	08 Nov 2023	12 Jul 2023	---
Machine Age	hrs	26477	26477	---
Oil Age	hrs	264	676	---
Oil Changed	Client Info	Not Chngd	N/A	---
Sample Status		ABNORMAL	SEVERE	---

CONTAMINATION

method	limit/base	current	history1	history2
Glycol	WC Method	NEG	NEG	---

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >120	21	52	---
Chromium	ppm	ASTM D5185m >20	<1	2	---
Nickel	ppm	ASTM D5185m >5	0	<1	---
Titanium	ppm	ASTM D5185m >2	0	0	---
Silver	ppm	ASTM D5185m >2	0	0	---
Aluminum	ppm	ASTM D5185m >20	1	2	---
Lead	ppm	ASTM D5185m >40	1	0	---
Copper	ppm	ASTM D5185m >330	3	2	---
Tin	ppm	ASTM D5185m >15	<1	<1	---
Vanadium	ppm	ASTM D5185m	0	0	---
Cadmium	ppm	ASTM D5185m	0	0	---

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	5	2	---
Barium	ppm	ASTM D5185m	0	0	---
Molybdenum	ppm	ASTM D5185m	58	68	---
Manganese	ppm	ASTM D5185m	<1	<1	---
Magnesium	ppm	ASTM D5185m	950	1028	---
Calcium	ppm	ASTM D5185m	1075	1140	---
Phosphorus	ppm	ASTM D5185m	1006	1049	---
Zinc	ppm	ASTM D5185m	1232	1323	---
Sulfur	ppm	ASTM D5185m	3003	3611	---

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	4	3	---
Sodium	ppm	ASTM D5185m	<1	<1	---
Potassium	ppm	ASTM D5185m >20	2	0	---
Fuel	%	ASTM D3524 >3.0	<1.0	<1.0	---

INFRA-RED




method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >4	▲ 4.6	7.8	---
Nitration	Abs/cm	*ASTM D7624 >20	10.7	49.8	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	26.6	73.3	---

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	16.0	113.8	---
Base Number (BN)	mg KOH/g	ASTM D2896	3.2	▲ 0.0	---







OIL ANALYSIS REPORT

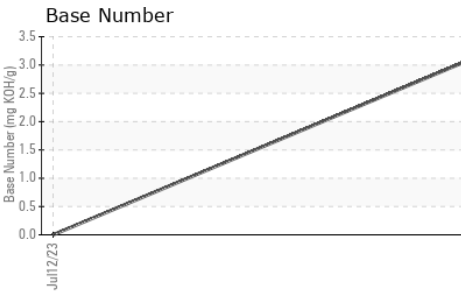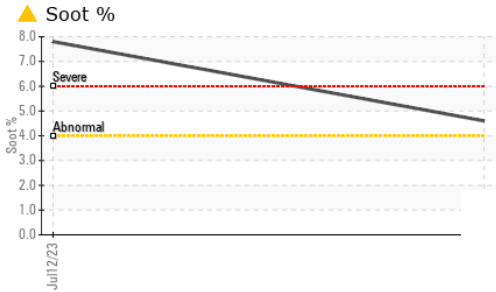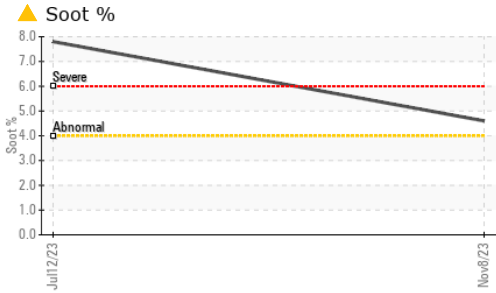

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	▲ 16.1	▲ 21.0	---

GRAPHS

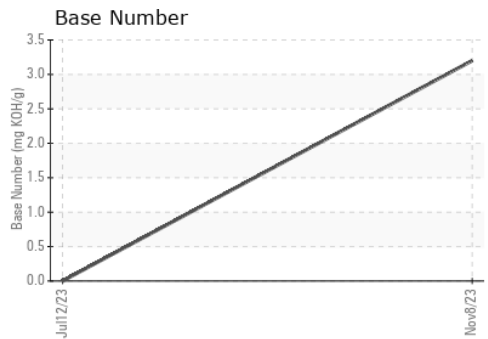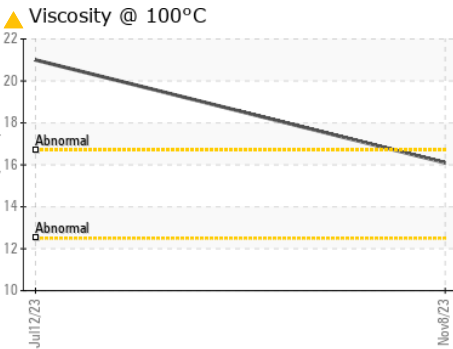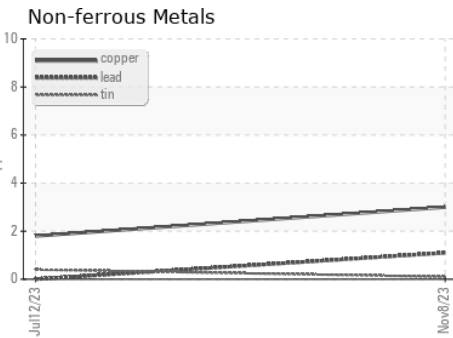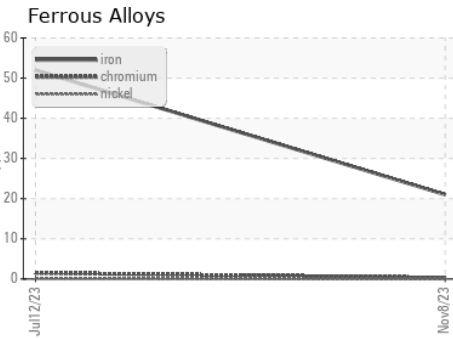

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0092668 **Received** : 15 Nov 2023
Lab Number : 06008147 **Diagnosed** : 16 Nov 2023
Unique Number : 10741909 **Diagnostician** : Jonathan Hester
Test Package : FLEET (Additional Tests: FuelDilution)

GFL Environmental - 005 - Wilson/Tri-East(CNG)
 2810 Contentnea Road S
 Wilson, NC
 US 27893-8501
 Contact: SPENCER LIGGON
 spencer.liggon@gflenv.com
 T: (800)207-6618
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)