




OIL ANALYSIS REPORT

Sample Rating Trend

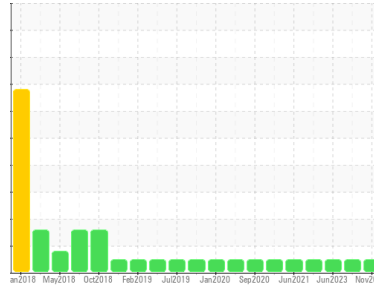

NORMAL



Area
(P635774)

Machine Id
10810

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (11 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0099488	GFL0091201	GFL0082198
Sample Date	Client Info		11 Nov 2023	15 Sep 2023	09 Jun 2023
Machine Age	hrs	Client Info	169693	108278	107838
Oil Age	hrs	Client Info	108660	108278	107838
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >75	8	20	14
Chromium	ppm	ASTM D5185m >5	0	<1	<1
Nickel	ppm	ASTM D5185m >4	0	<1	0
Titanium	ppm	ASTM D5185m >2	0	0	0
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >15	2	4	2
Lead	ppm	ASTM D5185m >25	<1	0	0
Copper	ppm	ASTM D5185m >100	<1	3	4
Tin	ppm	ASTM D5185m >4	0	<1	0
Antimony	ppm	ASTM D5185m	---	---	---
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	26	18	16
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 60	74	68	59
Manganese	ppm	ASTM D5185m 0	0	<1	<1
Magnesium	ppm	ASTM D5185m 1010	673	885	726
Calcium	ppm	ASTM D5185m 1070	1390	1188	1195
Phosphorus	ppm	ASTM D5185m 1150	1041	1028	920
Zinc	ppm	ASTM D5185m 1270	1273	1246	1151
Sulfur	ppm	ASTM D5185m 2060	3373	3779	3523

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	4	4	3
Sodium	ppm	ASTM D5185m	15	13	12
Potassium	ppm	ASTM D5185m >20	27	23	24

INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >6	0.3	0	0.2
Nitration	Abs/cm	*ASTM D7624 >20	7.9	8.0	7.5
Sulfation	Abs/.1mm	*ASTM D7415 >30	18.3	21.8	20.5

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	14.1	15.9	17.5
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	7.3	8.9	7.5







OIL ANALYSIS REPORT

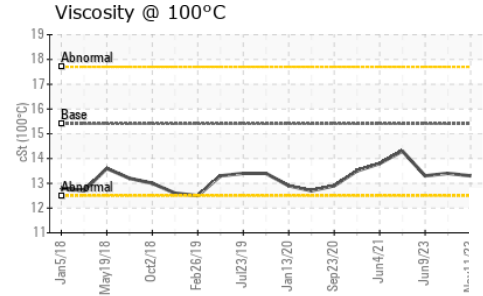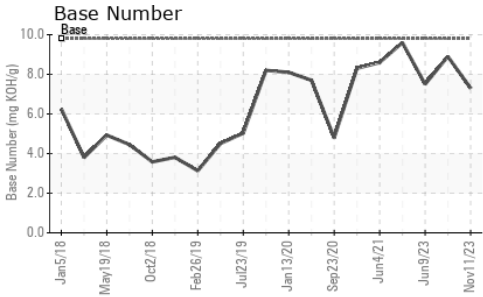

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.3	13.4

GRAPHS

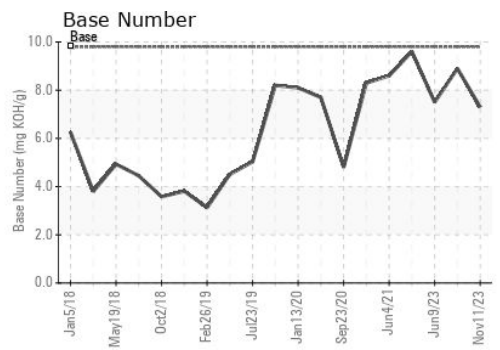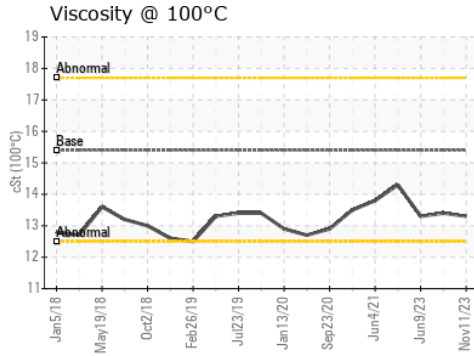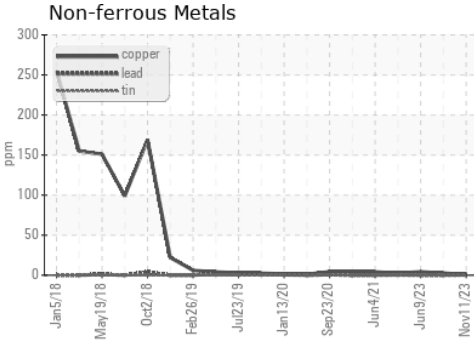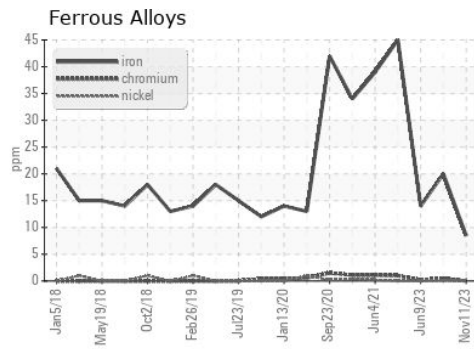

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0099488
 Lab Number : 06008150
 Unique Number : 10741912
 Test Package : FLEET

Received : 15 Nov 2023
 Tested : 16 Nov 2023
 Diagnosed : 16 Nov 2023 - Wes Davis

GFL Environmental - 015 - Columbia
 7800 Farrow Road
 Columbia, SC
 US 29203-3219
 Contact: NOEL MATTHEWS
 nmatthewsjr@gflenv.com
 T: (803)935-0249
 F: (803)935-0244

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)