


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

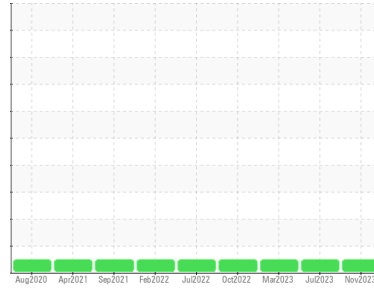

Machine Id  
**PREVOST 113**

Component  
**Rear Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION |                 | method | limit/base | current            | history1    | history2    |
|--------------------|-----------------|--------|------------|--------------------|-------------|-------------|
| Sample Number      | Client Info     |        |            | <b>PCA0101050</b>  | PCA0094190  | PCA0094175  |
| Sample Date        | Client Info     |        |            | <b>02 Nov 2023</b> | 06 Jul 2023 | 06 Mar 2023 |
| Machine Age        | mls Client Info |        |            | <b>256634</b>      | 244014      | 233025      |
| Oil Age            | mls Client Info |        |            | <b>12620</b>       | 10989       | 11790       |
| Oil Changed        | Client Info     |        |            | <b>Changed</b>     | Changed     | Changed     |
| Sample Status      |                 |        |            | <b>NORMAL</b>      | NORMAL      | NORMAL      |

| CONTAMINATION |           | method | limit/base | current        | history1 | history2 |
|---------------|-----------|--------|------------|----------------|----------|----------|
| Fuel          | WC Method | >5     |            | <b>&lt;1.0</b> | <1.0     | <1.0     |
| Glycol        | WC Method |        |            | <b>NEG</b>     | NEG      | NEG      |

| WEAR METALS |     | method      | limit/base | current      | history1 | history2 |
|-------------|-----|-------------|------------|--------------|----------|----------|
| Iron        | ppm | ASTM D5185m | >100       | <b>14</b>    | 12       | 11       |
| Chromium    | ppm | ASTM D5185m | >20        | <b>&lt;1</b> | <1       | <1       |
| Nickel      | ppm | ASTM D5185m | >4         | <b>1</b>     | 2        | 0        |
| Titanium    | ppm | ASTM D5185m |            | <b>0</b>     | 0        | 0        |
| Silver      | ppm | ASTM D5185m | >3         | <b>0</b>     | 0        | <1       |
| Aluminum    | ppm | ASTM D5185m | >20        | <b>18</b>    | 11       | 6        |
| Lead        | ppm | ASTM D5185m | >40        | <b>&lt;1</b> | <1       | 0        |
| Copper      | ppm | ASTM D5185m | >330       | <b>&lt;1</b> | 1        | <1       |
| Tin         | ppm | ASTM D5185m | >15        | <b>&lt;1</b> | <1       | 0        |
| Vanadium    | ppm | ASTM D5185m |            | <b>0</b>     | <1       | <1       |
| Cadmium     | ppm | ASTM D5185m |            | <b>0</b>     | 0        | 0        |



| ADDITIVES  |     | method      | limit/base | current      | history1 | history2 |
|------------|-----|-------------|------------|--------------|----------|----------|
| Boron      | ppm | ASTM D5185m | 0          | <b>4</b>     | <1       | 0        |
| Barium     | ppm | ASTM D5185m | 0          | <b>0</b>     | 2        | 0        |
| Molybdenum | ppm | ASTM D5185m | 60         | <b>58</b>    | 63       | 55       |
| Manganese  | ppm | ASTM D5185m | 0          | <b>&lt;1</b> | <1       | <1       |
| Magnesium  | ppm | ASTM D5185m | 1010       | <b>942</b>   | 955      | 902      |
| Calcium    | ppm | ASTM D5185m | 1070       | <b>996</b>   | 1106     | 984      |
| Phosphorus | ppm | ASTM D5185m | 1150       | <b>946</b>   | 1010     | 887      |
| Zinc       | ppm | ASTM D5185m | 1270       | <b>1243</b>  | 1275     | 1148     |
| Sulfur     | ppm | ASTM D5185m | 2060       | <b>2822</b>  | 3313     | 2856     |

| CONTAMINANTS |     | method      | limit/base | current  | history1 | history2 |
|--------------|-----|-------------|------------|----------|----------|----------|
| Silicon      | ppm | ASTM D5185m | >25        | <b>3</b> | 3        | 3        |
| Sodium       | ppm | ASTM D5185m |            | <b>6</b> | 5        | 2        |
| Potassium    | ppm | ASTM D5185m | >20        | <b>0</b> | <1       | 0        |

| INFRA-RED |          | method      | limit/base | current     | history1 | history2 |
|-----------|----------|-------------|------------|-------------|----------|----------|
| Soot %    | %        | *ASTM D7844 | >3         | <b>0.6</b>  | 0.5      | 0.6      |
| Nitration | Abs/cm   | *ASTM D7624 | >20        | <b>7.7</b>  | 7.9      | 6.8      |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30        | <b>19.5</b> | 19.9     | 16.4     |

| FLUID DEGRADATION |          | method      | limit/base | current     | history1 | history2 |
|-------------------|----------|-------------|------------|-------------|----------|----------|
| Oxidation         | Abs/.1mm | *ASTM D7414 | >25        | <b>14.6</b> | 15.2     | 12.7     |
| Base Number (BN)  | mg KOH/g | ASTM D2896  | 9.8        | <b>7.37</b> | 9.74     | 10.10    |









# OIL ANALYSIS REPORT

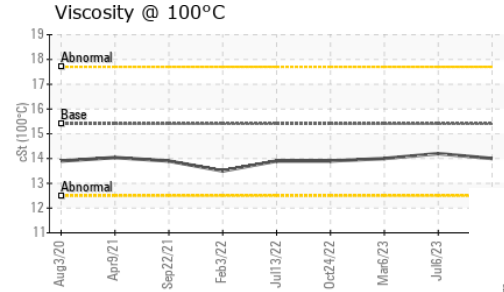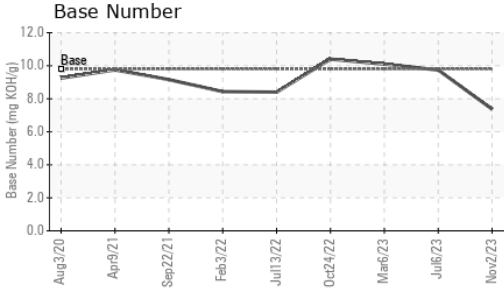

| PARAMETER        | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |

| PARAMETER    | method | limit/base | current | history1 | history2 |
|--------------|--------|------------|---------|----------|----------|
| Visc @ 100°C | cSt    | ASTM D445  | 15.4    | 14.0     | 14.2     |

## GRAPHS

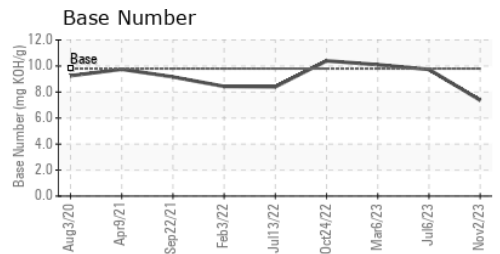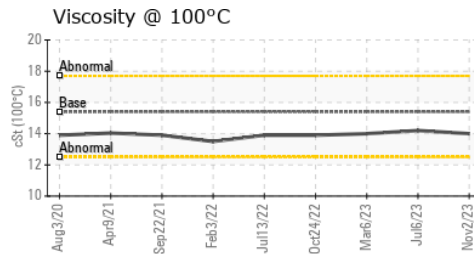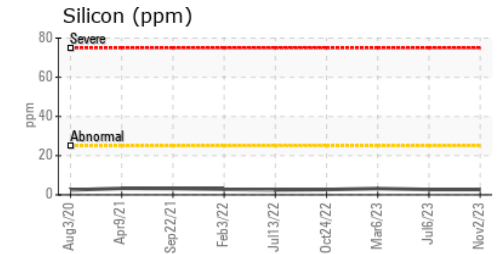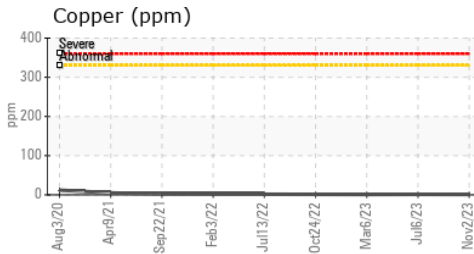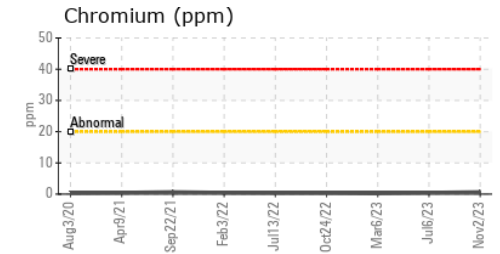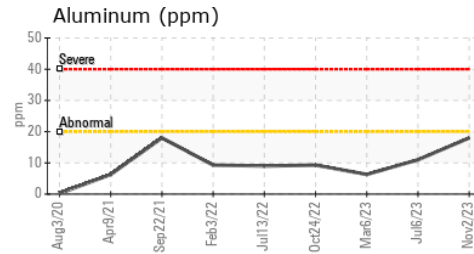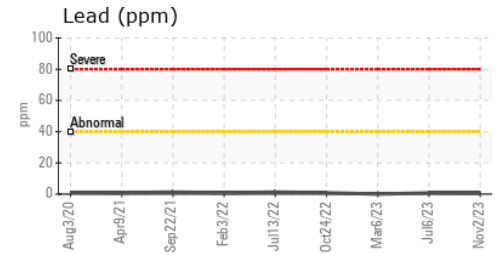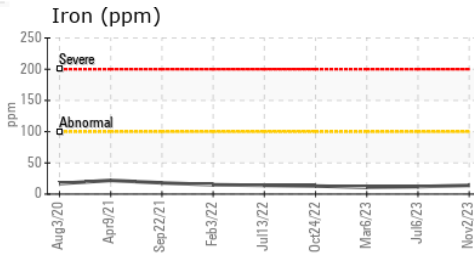

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0101050 **Received** : 15 Nov 2023  
**Lab Number** : 06008544 **Diagnosed** : 16 Nov 2023  
**Unique Number** : 10742306 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2

**BROWN BUS COMPANY - UPSTATE TRANSIT**  
 50 VENNERS ROAD  
 AMSTERDAM, NY  
 US 12010  
 Contact: CONNIE WILBUR  
 cwilbur@browncoach.com  
 T: (518)843-4700  
 F: (518)843-3600

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)