




# OIL ANALYSIS REPORT

Sample Rating Trend

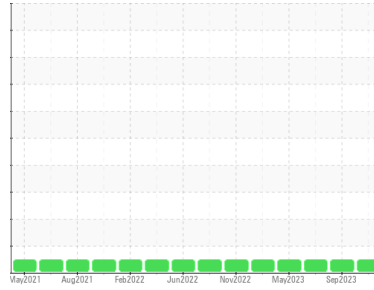

**NORMAL**



Machine Id  
**929098-43**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- LTR)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0091950</b>	GFL0091963	GFL0070907
Sample Date	Client Info		<b>10 Nov 2023</b>	04 Sep 2023	03 Aug 2023
Machine Age	hrs	Client Info	<b>10419</b>	10146	9991
Oil Age	hrs	Client Info	<b>273</b>	600	475
Oil Changed	Client Info		<b>Not Changed</b>	Changed	Not Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >110	<b>&lt;1</b>	10	6
Chromium	ppm	ASTM D5185m >4	<b>0</b>	<1	0
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>&lt;1</b>	1	<1
Lead	ppm	ASTM D5185m >45	<b>0</b>	2	<1
Copper	ppm	ASTM D5185m >85	<b>1</b>	19	7
Tin	ppm	ASTM D5185m >4	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>6</b>	5	6
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>57</b>	67	60
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>953</b>	1062	915
Calcium	ppm	ASTM D5185m 1070	<b>1006</b>	1223	1128
Phosphorus	ppm	ASTM D5185m 1150	<b>1016</b>	1094	999
Zinc	ppm	ASTM D5185m 1270	<b>1256</b>	1344	1245
Sulfur	ppm	ASTM D5185m 2060	<b>3162</b>	3565	3691

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	<b>3</b>	7	4
Sodium	ppm	ASTM D5185m	<b>2</b>	6	3
Potassium	ppm	ASTM D5185m >20	<b>0</b>	0	2
Fuel	%	ASTM D3524 >5	<b>0.4</b>	<1.0	<1.0

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.1</b>	0.4	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>5.9</b>	10.5	5.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>17.0</b>	21.3	17.4

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.7</b>	17.6	13.3
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>10.6</b>	7.9	8.9







# OIL ANALYSIS REPORT

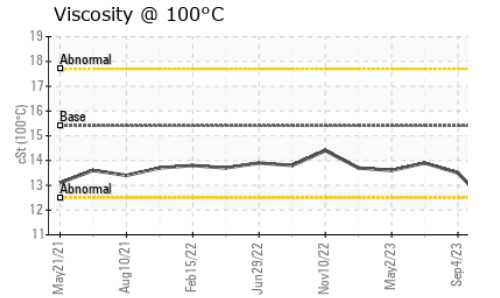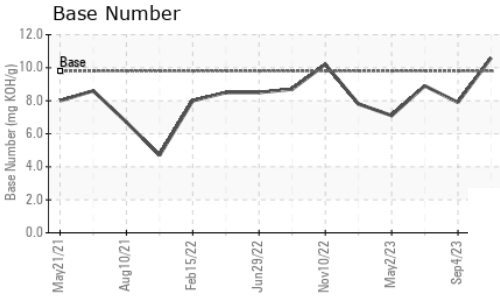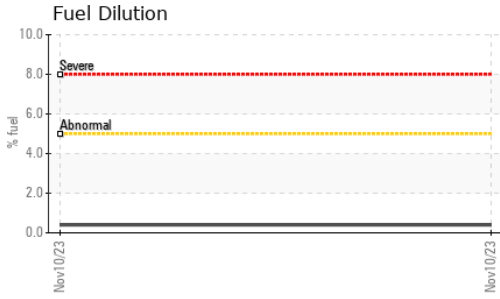

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>12.1</b>	13.5	13.9

## GRAPHS

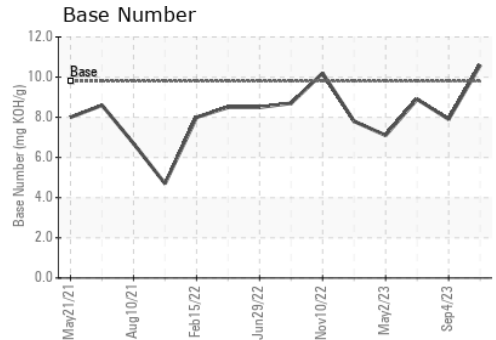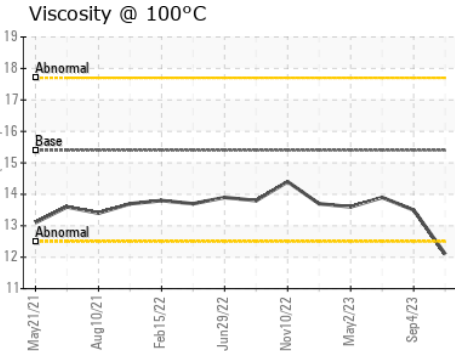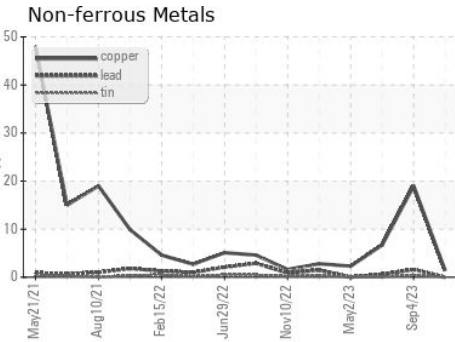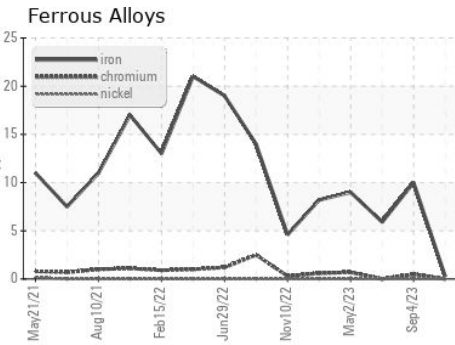

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0091950 **Received** : 15 Nov 2023  
**Lab Number** : 06008814 **Diagnosed** : 17 Nov 2023  
**Unique Number** : 10742576 **Diagnostician** : Wes Davis  
**Test Package** : FLEET ( Additional Tests: FuelDilution, PercentFuel )

**GFL Environmental - 683 - Ruckersville Hauling**  
 261 INDUSTRIAL DR  
 Ruckersville, VA  
 US 22698  
 Contact: Jaf Finney  
 jfinney@gflenv.com  
 T: (434)990-4972  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)