

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
(2847749) Dairy Farms of America-Tractor
 Machine Id
[Dairy Farms of America-Tractor] 268A25254
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (11 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0108283	---	---
Sample Date	Client Info	30 Oct 2023	---	---
Machine Age	mls	Client Info	555331	---
Oil Age	mls	Client Info	40000	---
Oil Changed	Client Info	Changed	---	---
Sample Status		NORMAL	---	---

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method	>2.0	<1.0	---
Glycol	WC Method		NEG	---

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>100	41	---
Chromium	ppm	ASTM D5185m	>20	1	---
Nickel	ppm	ASTM D5185m	>4	0	---
Titanium	ppm	ASTM D5185m		0	---
Silver	ppm	ASTM D5185m	>3	0	---
Aluminum	ppm	ASTM D5185m	>20	10	---
Lead	ppm	ASTM D5185m	>40	23	---
Copper	ppm	ASTM D5185m	>330	4	---
Tin	ppm	ASTM D5185m	>15	<1	---
Vanadium	ppm	ASTM D5185m		0	---
Cadmium	ppm	ASTM D5185m		0	---

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	2	44	---
Barium	ppm	ASTM D5185m	0	0	---
Molybdenum	ppm	ASTM D5185m	50	125	---
Manganese	ppm	ASTM D5185m	0	<1	---
Magnesium	ppm	ASTM D5185m	950	542	---
Calcium	ppm	ASTM D5185m	1050	1467	---
Phosphorus	ppm	ASTM D5185m	995	900	---
Zinc	ppm	ASTM D5185m	1180	1098	---
Sulfur	ppm	ASTM D5185m	2600	2869	---

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	9	---
Sodium	ppm	ASTM D5185m		3	---
Potassium	ppm	ASTM D5185m	>20	32	---



INFRA-RED

method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	0.9	---
Nitration	Abs/cm	*ASTM D7624	>20	10.6	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	28.0	---

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	23.3	---
Base Number (BN)	mg KOH/g	ASTM D2896		5.1	---





OIL ANALYSIS REPORT

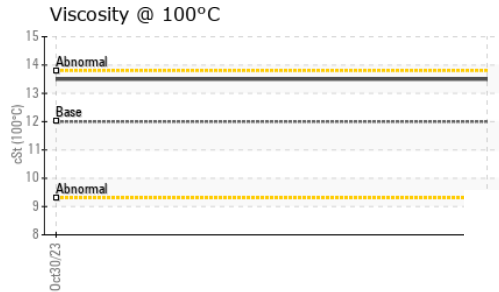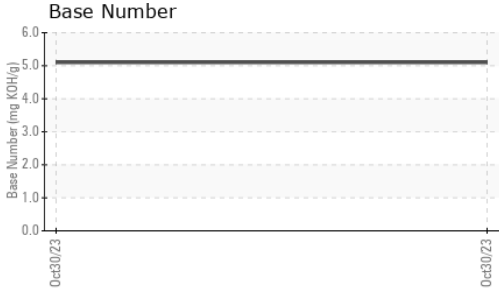

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	13.5	---	---

GRAPHS

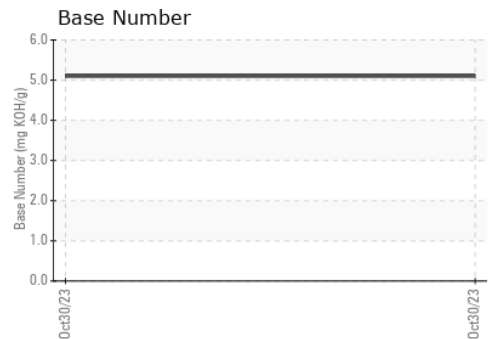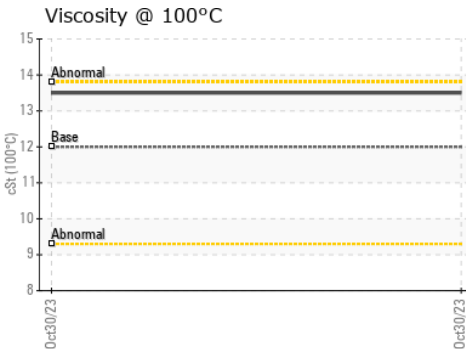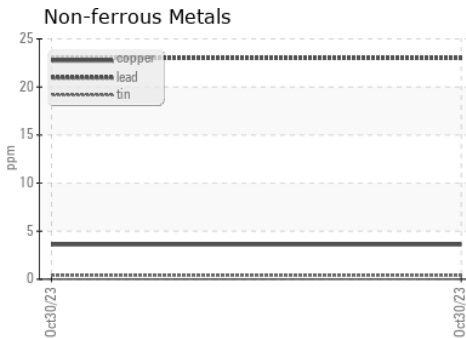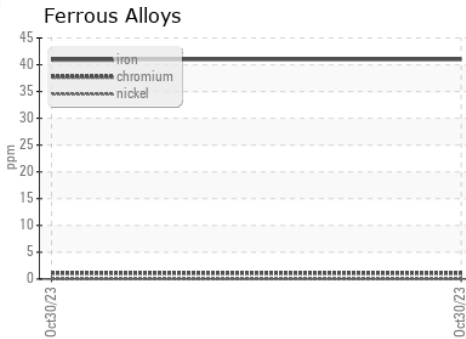

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0108283 **Received** : 15 Nov 2023
Lab Number : **06008998** **Diagnosed** : 18 Nov 2023
Unique Number : 10742760 **Diagnostician** : Don Baldrige
Test Package : FLEET

Transervice - Shop 2680 - LeMars
 1330 12th Ave SW
 LeMars, IA
 US 51031
 Contact: Stacey Rabey
 srabey@transervice.com
 T: (712)501-9908
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)