


# PROBLEM SUMMARY

Area  
**(2432779) Dairy Farms of America-Tractor**  
 Machine Id  
**[Dairy Farms of America-Tractor] 268A26303**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

Sample Rating Trend

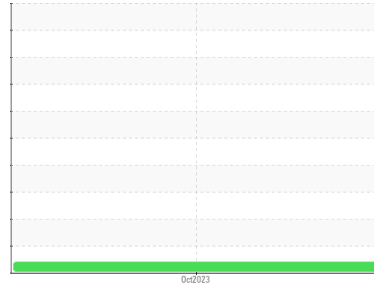


## VISCOSITY



### COMPONENT CONDITION SUMMARY

▲ Viscosity @ 100°C

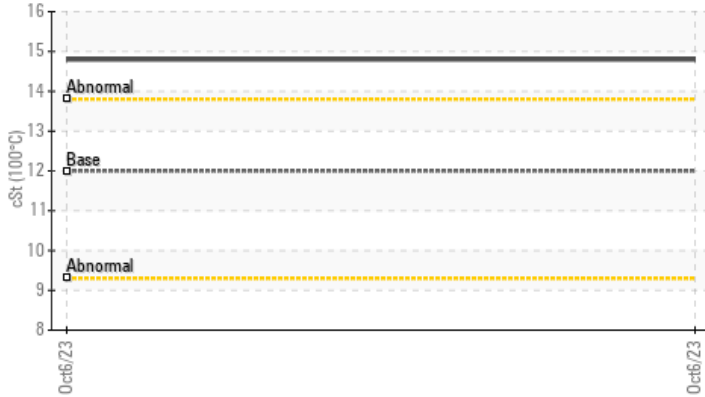

### RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### PROBLEMATIC TEST RESULTS

Sample Status				ATTENTION	---	---
Visc @ 100°C	cSt	ASTM D445	12.00	▲ 14.8	---	---

Customer Id: TSV2680  
 Sample No.: PCA0108280  
 Lab Number: 06009000  
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Don Baldrige +1  
[don.b505@comcast.net](mailto:don.b505@comcast.net)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)


## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.

## HISTORICAL DIAGNOSIS

# OIL ANALYSIS REPORT

Sample Rating Trend

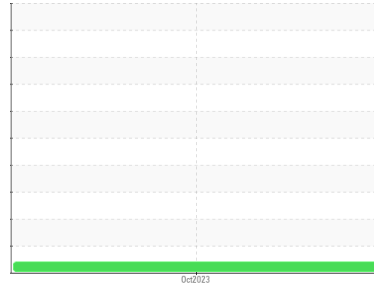

**VISCOSITY**



Area  
**(2432779) Dairy Farms of America-Tractor**  
 Machine Id  
**[Dairy Farms of America-Tractor] 268A26303**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

## DIAGNOSIS

### ▲ Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### ▲ Fluid Condition

The oil viscosity is higher than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0108280</b>	---	---
Sample Date	Client Info		<b>06 Oct 2023</b>	---	---
Machine Age	mls	Client Info	<b>500730</b>	---	---
Oil Age	mls	Client Info	<b>30000</b>	---	---
Oil Changed	Client Info		<b>Changed</b>	---	---
Sample Status			<b>ATTENTION</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	---	---
Glycol	WC Method		<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	<b>23</b>	---	---
Chromium	ppm	ASTM D5185m >5	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m >3	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m >30	<b>10</b>	---	---
Lead	ppm	ASTM D5185m >30	<b>0</b>	---	---
Copper	ppm	ASTM D5185m >150	<b>2</b>	---	---
Tin	ppm	ASTM D5185m >5	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>105</b>	---	---
Barium	ppm	ASTM D5185m 0	<b>7</b>	---	---
Molybdenum	ppm	ASTM D5185m 50	<b>134</b>	---	---
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m 950	<b>681</b>	---	---
Calcium	ppm	ASTM D5185m 1050	<b>1788</b>	---	---
Phosphorus	ppm	ASTM D5185m 995	<b>991</b>	---	---
Zinc	ppm	ASTM D5185m 1180	<b>1147</b>	---	---
Sulfur	ppm	ASTM D5185m 2600	<b>3829</b>	---	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>7</b>	---	---
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>3</b>	---	---



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.9</b>	---	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.3</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>25.9</b>	---	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>20.4</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	<b>6.3</b>	---	---





# OIL ANALYSIS REPORT

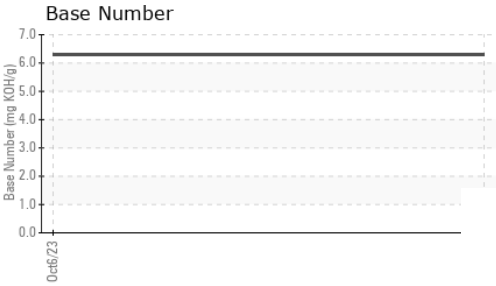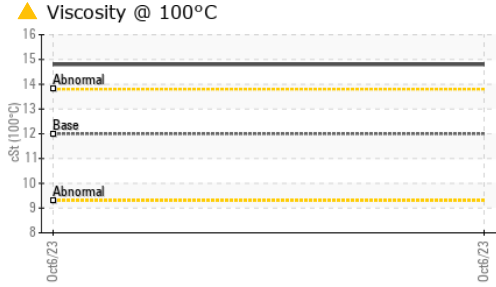

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	---
Free Water	scalar	*Visual		<b>NEG</b>	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	▲ <b>14.8</b>	---

## GRAPHS

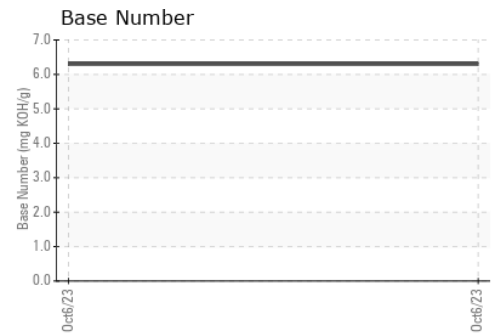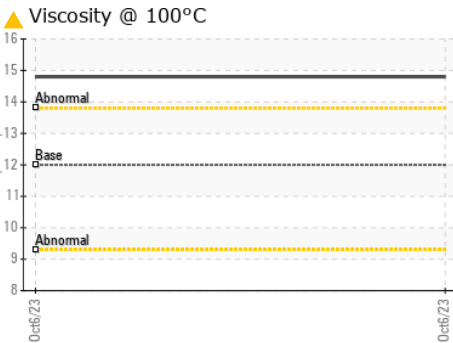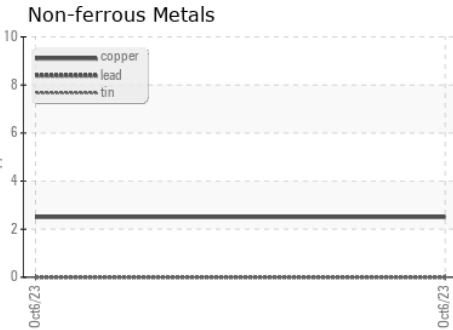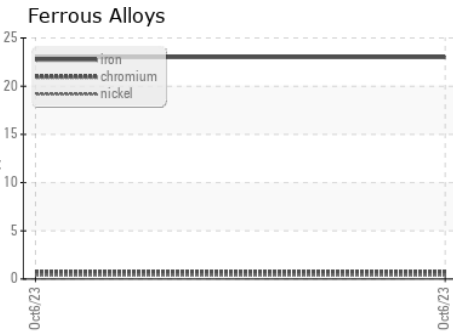

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0108280 **Received** : 15 Nov 2023  
**Lab Number** : **06009000** **Diagnosed** : 18 Nov 2023  
**Unique Number** : 10742762 **Diagnostician** : Don Baldrige  
**Test Package** : FLEET

**Transervice - Shop 2680 - LeMars**  
 1330 12th Ave SW  
 LeMars, IA  
 US 51031  
 Contact: Stacey Rabey  
 srabey@transervice.com  
 T: (712)501-9908  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)