


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

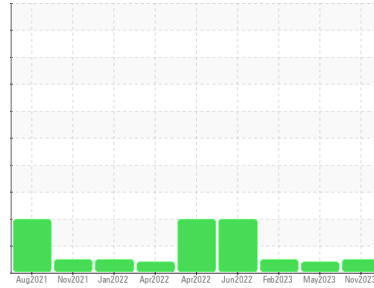

Area  
**Sawmill/Gang**  
 Machine Id  
**[Sawmill^Gang] High & Low Speed**  
 Component  
**Bearing**  
 Fluid  
**PETRO CANADA HYDREX AW 68 (175 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PCA0111693</b>	PCA0079468	PCA0079451
Sample Date	Client Info	<b>13 Nov 2023</b>	11 May 2023	14 Feb 2023
Machine Age	mths Client Info	<b>0</b>	1	1
Oil Age	mths Client Info	<b>0</b>	0	0
Oil Changed	Client Info	<b>Not Changed</b>	Not Changd	Not Changed
Sample Status		<b>NORMAL</b>	ATTENTION	NORMAL

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >20	<b>0</b>	0	0
Chromium	ppm ASTM D5185m >20	<b>0</b>	0	0
Nickel	ppm ASTM D5185m >20	<b>0</b>	0	0
Titanium	ppm ASTM D5185m	<b>0</b>	0	0
Silver	ppm ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>&lt;1</b>	1	0
Lead	ppm ASTM D5185m >20	<b>0</b>	0	0
Copper	ppm ASTM D5185m >20	<b>0</b>	0	0
Tin	ppm ASTM D5185m >20	<b>0</b>	0	0
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>0</b>	0	0
Barium	ppm ASTM D5185m 0	<b>7</b>	0	0
Molybdenum	ppm ASTM D5185m 0	<b>0</b>	0	0
Manganese	ppm ASTM D5185m 0	<b>0</b>	0	0
Magnesium	ppm ASTM D5185m 0	<b>1</b>	0	0
Calcium	ppm ASTM D5185m 50	<b>51</b>	53	49
Phosphorus	ppm ASTM D5185m 330	<b>324</b>	350	314
Zinc	ppm ASTM D5185m 430	<b>413</b>	424	395
Sulfur	ppm ASTM D5185m 760	<b>880</b>	665	687

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >15	<b>4</b>	<1	2
Sodium	ppm ASTM D5185m	<b>0</b>	0	<1
Potassium	ppm ASTM D5185m >20	<b>&lt;1</b>	0	0
Water	% ASTM D6304 >2	<b>0.006</b>	0.006	0.006
ppm Water	ppm ASTM D6304	<b>64.5</b>	60.2	65.0






## FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >10000	<b>3061</b>	2551	1796
Particles >6µm	ASTM D7647 >2500	<b>704</b>	633	477
Particles >14µm	ASTM D7647 >160	<b>37</b>	43	23
Particles >21µm	ASTM D7647 >40	<b>8</b>	14	5
Particles >38µm	ASTM D7647 >10	<b>1</b>	0	1
Particles >71µm	ASTM D7647 >3	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c) >20/18/14	<b>19/17/12</b>	19/16/13	18/16/12

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D8045 0.60	<b>0.39</b>	0.39	0.41


# OIL ANALYSIS REPORT

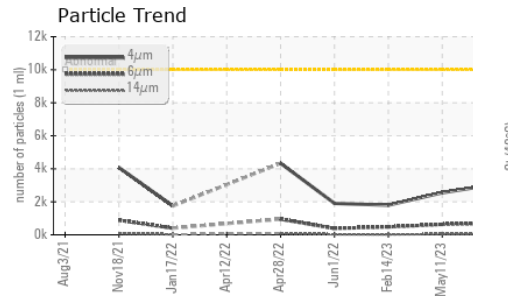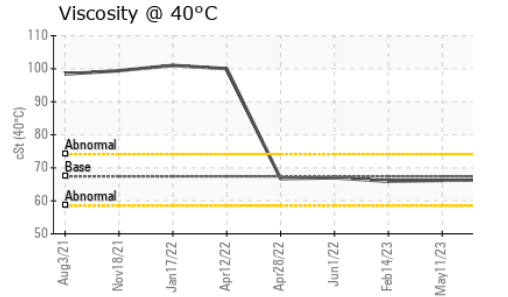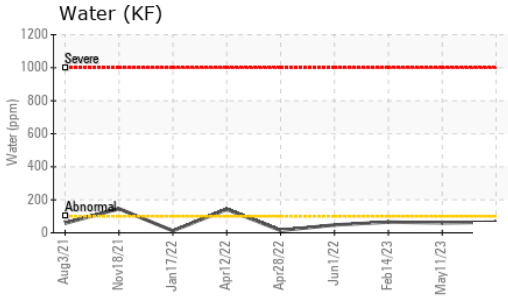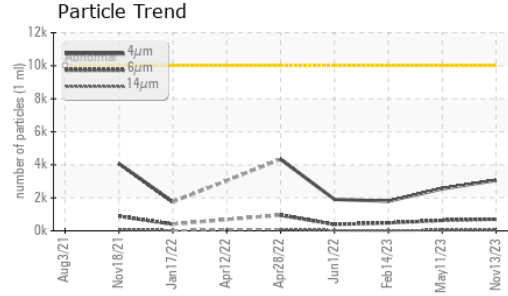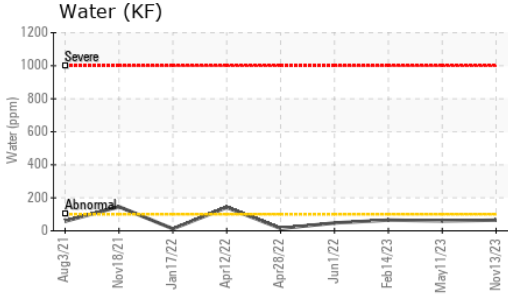






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	67.4	66.3	▲ 66.2	65.9

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

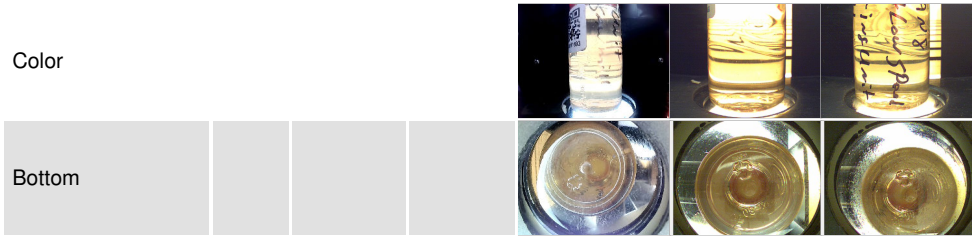

## GRAPHS

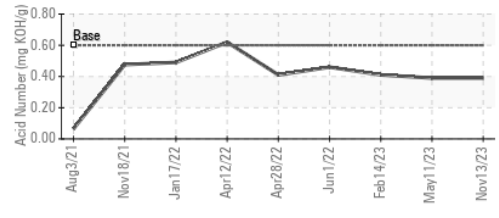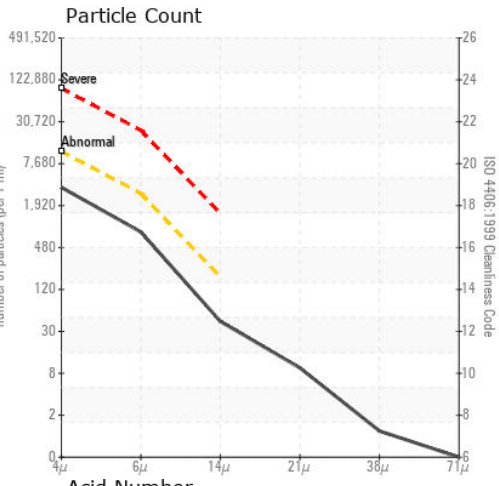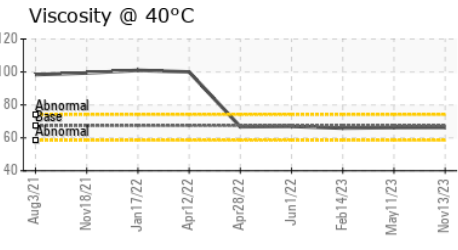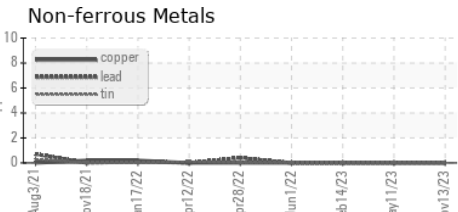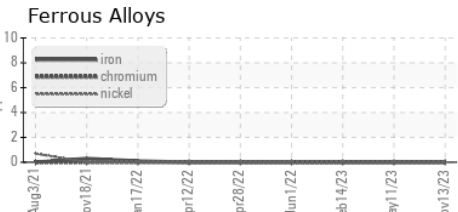

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0111693  
**Lab Number** : 06009648  
**Unique Number** : 10743410  
**Test Package** : IND 2 ( Additional Tests: KF, PrtCount )

**West Fraser Inc. - Armour Lumber Mill**  
 361 Federal Road, PO Box 57  
 Riegelwood, NC  
 US 28456  
 Contact: Juan Navarro  
 Juan.Navarro@westfraser.com  
 T:  
 F: (910)655-9368

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)