

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

Sawmill/Canter [Sawmill^Canter] DLI HPU Component

Hydraulic System

PETRO CANADA HYDREX AW 68 (545 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. The system and fluid cleanliness is acceptable.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


.)						
•		Apr2021	Aug2021 Nov2021	Jan 2022 Apr2022 Feb2023	Nov2023	la i ata muQ
SAMPLE INFOR			limit/base		history1	history2
Sample Number Sample Date		Client Info Client Info		PCA0111705 13 Nov 2023	PCA0079400	PCA0079443
Machine Age	mths	Client Info		0	11 May 2023 7	14 Feb 2023 7
Oil Age	mths	Client Info		0	0	0
Oil Changed	111115	Client Info		0 Not Changd	Changed	Filtered
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METAL	_S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	0	0	<1
Chromium	ppm	ASTM D5185m	>20	0	0	0
Nickel	ppm	ASTM D5185m	>20	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>20	<1	1	0
Lead	ppm	ASTM D5185m	>20	0	0	0
Copper	ppm	ASTM D5185m	>20	<1	0	<1
Tin	ppm	ASTM D5185m	>20	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	0	7	0	0
Molybdenum	ppm	ASTM D5185m	0	<1	0	<1
Manganese	ppm	ASTM D5185m	0	0	0	0
Magnesium	ppm	ASTM D5185m	0	3	0	1
Calcium	ppm	ASTM D5185m	50	164	54	58
Phosphorus	ppm	ASTM D5185m	330	336	342	319
Zinc	ppm	ASTM D5185m	430	419	418	374
Sulfur	ppm	ASTM D5185m	760	1057	655	731
CONTAMINAN	NTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1	<1	<1
Sodium	ppm	ASTM D5185m		0	0	<1
Potassium	ppm	ASTM D5185m	>20	<1	0	0
Water	%	ASTM D6304	>0.05	0.015	0.004	0.006
ppm Water	ppm	ASTM D6304	>500	151.2	40.9	64.5
FLUID CLEAN	LINESS		limit/base		history1	history2
Particles >4µm		ASTM D7647	>5000	1411	1683	1713
Particles >6µm		ASTM D7647	>1300	160	300	485
Particles >14µm		ASTM D7647	>160	16	18	43
Particles >21µm		ASTM D7647	>40	6	6	10
Particles >38µm		ASTM D7647	>10	1	0	1
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	18/14/11	18/15/11	18/16/13
FLUID DEGRA	DATION		limit/base		history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.60	0.36	0.40	0.23



OIL ANALYSIS REPORT

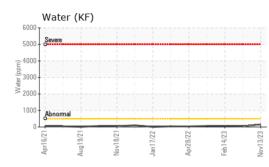


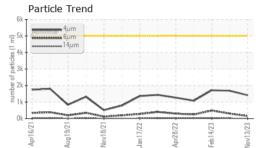

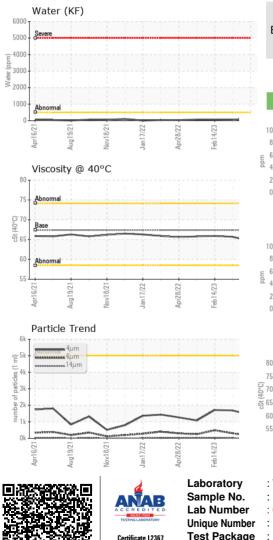

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPE	RTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	67.4	64.6	65.7	65.9
SAMPLE IMAC	GES	method	limit/base	current	history1	history2
Color						
Pottom					(Contraction)	

Bottom

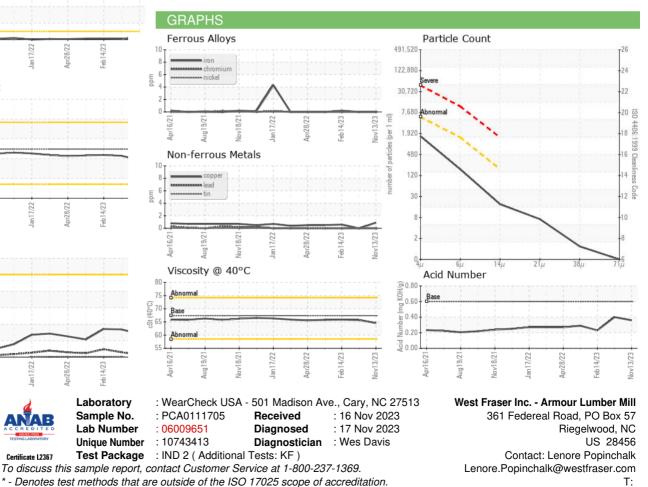

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Page 2 of 2

F: (910)655-9368